



Real-time module switching — lidar demo (473 kf, 13 loops, 3 switches)



Keyframe-to-keyframe displacement — smooth across each switch, no teleport (stable handoff)

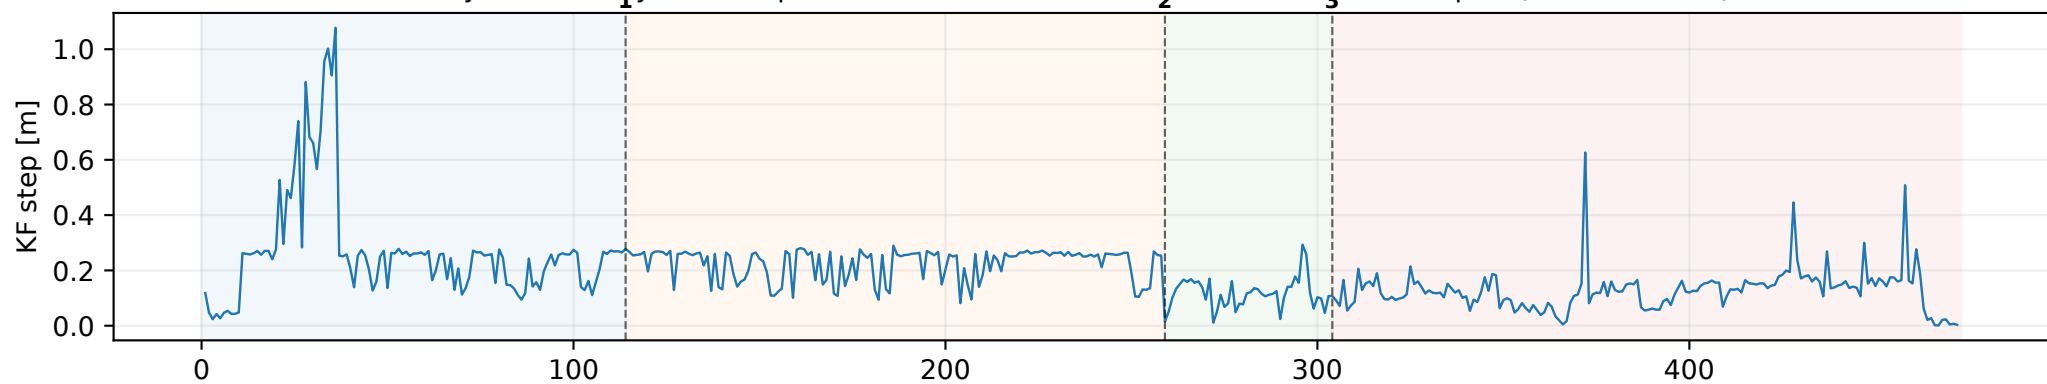

Front-end tracking quality per segment (visual = VO inlier count, LiDAR = scan-match score)

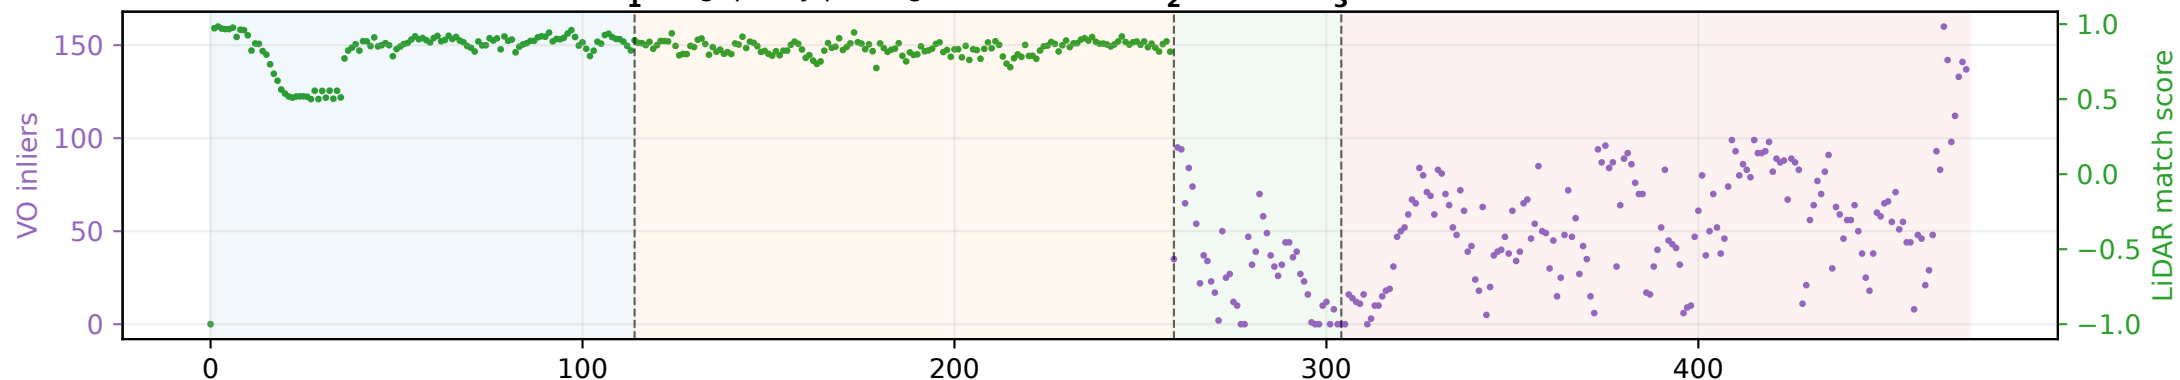

Accepted loop closures (cumulative) — loops keep closing across switches; flat stretches = route not revisiting

