



Product
Catalogue
2023



FANS | LIGHTING | APPLIANCES



About RR Global

RR Global, a USD 1.25 billion conglomerate has moulded its success on innovation. Since the foundation of the brand, its architects opted that innovation is the key to success of every product in the brand. It was a really courageous decision because at that point in time categories like wires and cables were highly commoditized. This optimistic development led to the creation of a brand - RR Kabel, a name which is admired worldwide with existence over 90+ countries across the globe.

Presently the company is ranked amongst the top three retail wire manufacturers across the nation. It is also the largest consumer of copper in India, an achievement which no one would have imagined a cable and wire company to be capable of and that is the reason they are preferred by clients who are some of the largest copper manufacturer in the country.

RR Global takes honour in establishing 9 companies and global offices, primarily in the U.A.E and Bangladesh. In their endeavour to set international benchmarks, RR Kabel has received 19 international accreditations. They are the first in India to have BASEC (U.K.), UL (U.S.A.), VDE (Germany), among others for its wide range of cables including ISO 50001 and ISO 14001.

Across the course of four decades, their impulse towards innovation to achieve success and hard work steered them to earn phenomenal recognition with RR Kabel becoming the desired choice for wires and cables not only in India but also on a global platform.

RR Global India focusses on cutting edge technology and research to enhance efficiency, reliability, and safe conduction of electricity. This in turn supported the core of the company's engineering endeavour which is to guarantee safe environments everywhere- offices, commercial spaces, industrial plants, and residences.



COMFORT
is in the AIR

RR Fans Product range is offered by RR Global, a USD 1.25 billion conglomerate in the electrical sector with a presence in over 85 countries globally.

Flagship brand RR Kabel (Wires & Cables) along with other Consumer Products Brand RR Fans, RR Lighting, RR Switches, RR Appliances and Arraystorm (Commercial Lighting) are part of marquee RR Global Brand.

RR Fans offer a wide range which is premium looking, high on performance and priced economically for various residential, commercial, institutional and industrial purposes.

The range spectrum spreads across Ceiling Fans, Table / Wall / Pedestal Fans, Ventilation Fans, Exhaust Fans (Light Duty / Heavy Duty), Air circulators.

Ceiling Fans







Performance Range



26 watt
BLDC fan



Silent
BLDC motor



High Air
Thrust



Remote
Control



65% Energy
Saving

Energy Saving Ceiling Fan

EFFY

- 26 watt BLDC fan with unique design developed in house.
- Built with best specification & is having highest service value of 8.27.
- LED speed indicator which also acts as night light.
- No drop in speed at low voltages.
- Smart remote with full speed mode and sleep timer.

SWEEP	POWER	SPEED	AD
1200mm	26W	350 RPM	215m ³ /min




Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.




Charcoal
Black

- Unique hoop-shaped trims for enhanced aesthetics
- Anti-dust coating for ease of maintenance
- High speed operation for better air experience
- High air delivery for elevated comfort level
- Aerodynamically engineered blade profile for best-in-class performance

SWEET	POWER	SPEED	AD
1200mm	32W	350 RPM	220 m ³ /min



Sparkling Silver



Pearl White


Anti-Dust Coating
Dust Retardant


High
Air Delivery


Remote
Control

NextGen
BLDC 



Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.



White

27
watt
BLDC fan

CEILING FAN
MH Deluxe



Energy Efficient
BLDC Motor



Remote
Control



Low Power
Consumption

- Energy savings upto ₹ 2,500 per year*
- 27W Super Power Saver with BLDC Motor
- Very high service value 8.0 (Better energy efficiency and Air delivery)
- Total Harmonic Distortion (THD) $\leq 10\%$ (With remote Mode operation only) ensures safe running on inverter

SWEEP	POWER	SPEED	AD
1200mm	27W	335 RPM	217m ³ /min

*Basis: Compared against regular 75W ceiling fan running 365 days continuously cost of 1 kWh = ₹ 6



Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.



Premium Range




Chestnut
Brown

Ceiling Fan
CELERITY
Star

- Exotic rich looks with metallic paint finish.
- Modern styling with decorative ring and trims.
- Superior air delivery performance : 225m³/min


SWEEP	POWER	SPEED	AD
1200mm	50W	350 RPM	225m ³ /min



Pearl
White



Steel
Grey



Marine
Blue



Caramel
Gold



Powerful
motor



Aerodynamic
Blades



Noiseless
operation



Decorative
Trims



Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.



Pearl
White

Ceiling Fan
VINDR⁺

- High speed decorative fan
- Anti dust metallic paint finish
- Wide and long aluminium blades for wider air circulation.

SWEEP	POWER	SPEED	AD
1200mm	55W	400RPM	220m ³ /min



Anti-Dust
Coating



High Air
Thrust



High Speed
@400 RPM



Decorative
Trims



Pearl Brown

Also available in
Rose Gold color



Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.



Pearl White

RR Ceiling Fan Amour




Anti-Dust Coating
Dust Retardant



High
Air Delivery

- Unique hoop-shaped trims for enhanced aesthetics
- Anti-dust coating for ease of maintenance
- High speed operation for better air experience
- High air delivery for elevated comfort level
- Aerodynamically engineered blade profile for best-in-class performance

SWEEP	POWER	SPEED	AD
1200mm	55W	400 RPM	220m ³ /min



Sparkling Silver



Charcoal Black



Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.



Economy Range



Ceiling Fan
VAYOO SUPER

Pearl
White

- Dust retardant blades for lesser dust accumulation.
- High speed (400 RPM) for instant relief.
- Aerodynamically balanced blade for high efficiency and low noise.

SWEEP	POWER	SPEED	AD
1200mm	52W	400 RPM	215m ³ /min



Anti-Dust
Blades



Aerodynamically
balanced blade



High Air
Thrust



High Speed
@400 RPM



Pearl Brown



Caramel Gold



Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.



Ceiling Fan **VINDR**

- Strong motor to operate even at low voltage conditions.
- Anti dust metallic paint finish
- Wide and long aluminium blades for wider air circulation.
- Sleek and light weight aluminium body.
- High speed operation.

SWEEP	POWER	SPEED	AD
1200mm	55W	400RPM	220m ³ /min



Powerful
motor



Anti-Dust
Coating




High Air
Thrust



High Speed
@400 RPM



Caramel Gold



Pearl White



Disclaimer: Due to continuous product improvements, Product Image shown may vary from actual product.





Sub-Economy Range



White

Ceiling Fan **VAYOO**

- Precisely balanced aerodynamically designed blades
- Suitable for low voltage operation
- Aluminium die cast motor & blades

SWEET	POWER	SPEED	AD
600mm	70W	745 RPM	140m ³ /min
900mm	47W	450 RPM	150m ³ /min
1200mm	52W	400 RPM	215m ³ /min
1400mm	58W	290 RPM	245m ³ /min



Low Voltage
Operation



Powerful
motor



Noiseless
operation



High
Speed



Brown



Ivory



Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.



Ivory

Ceiling Fan
FLOMAX⁺



Double ball
bearings



Powerful
motor



Decorative
Trims




High Speed
@400 RPM

- Decorative ceiling fan
- Aluminium pressure die cast motor body
- Strong motor with high air delivery
- Double ball bearings for smooth operation
- Powder coated surface finish for better scratch resistance.
- High speed operation.

SWEEP	POWER	SPEED	AD
1200 mm	52W	400 RPM	210m ³ /min



Brown



White



Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.



White

Ceiling Fan **FLOMAX**

- Aluminium pressure die cast motor body
- Strong motor with high air delivery
- Double ball bearings for smooth operation
- Powder coated surface finish for better scratch resistance

SWEEP	POWER	SPEED	AD
600 mm	80W	850 RPM	110 m ³ /min
900 mm	47W	450 RPM	150 m ³ /min
1200 mm	50W	400 RPM	215 m ³ /min
1400 mm	58W	300 RPM	245 m ³ /min



Double ball
bearings




Powerful
motor



High Air
Thrust



High
Speed



Ivory



Brown



Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.



Brown



Ceiling Fan
DROOT
Eco

- Elegant Design
- High Lift Angle of Blade for wider Air Spread
- Operational at Low Voltage as well
- Double Shielded Ball Bearing in Motor for Long Life

SWEEP	POWER	SPEED	AD
1200 mm	52W	350 RPM	210m ³ /min



Low Voltage
Operation



Double ball
bearings



High Air
Thrust



Ivory



White



Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.



White

Ceiling Fan **DROOT** Eco HS

- Elegant Design
- Superior High speed Performance
- High Lift Angle of Blade for wider Air Spread
- Operational at Low Voltage as well
- Double Shielded Ball Bearing in Motor for Long Life

SWEEP	POWER	SPEED	AD
1200 mm	50W	400 RPM	210m ³ /min



Low Voltage
Operation



Double ball
bearings



High Air
Thrust



High Speed
@400 RPM



Ivory



Brown



Disclaimer : Due to continuous product improvement, Product Image shown may vary from actual product.



Ceiling Fan **ERMIR**

Brown

- Precisely balanced aerodynamically designed aluminium blades.
- Double ball bearings for smooth operation.
- Strong 14 pole motor for silent operation & longer life.
- Service value above 4.2

SWEET	POWER	SPEED	AD
1200 mm	50W	350 RPM	210m ³ /min



Powerful
motor



Double ball
bearings



Aerodynamic
Blades



White

IS 374:2019



CML/NO 4844678




Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.





Table
Pedestal
Wall Fans

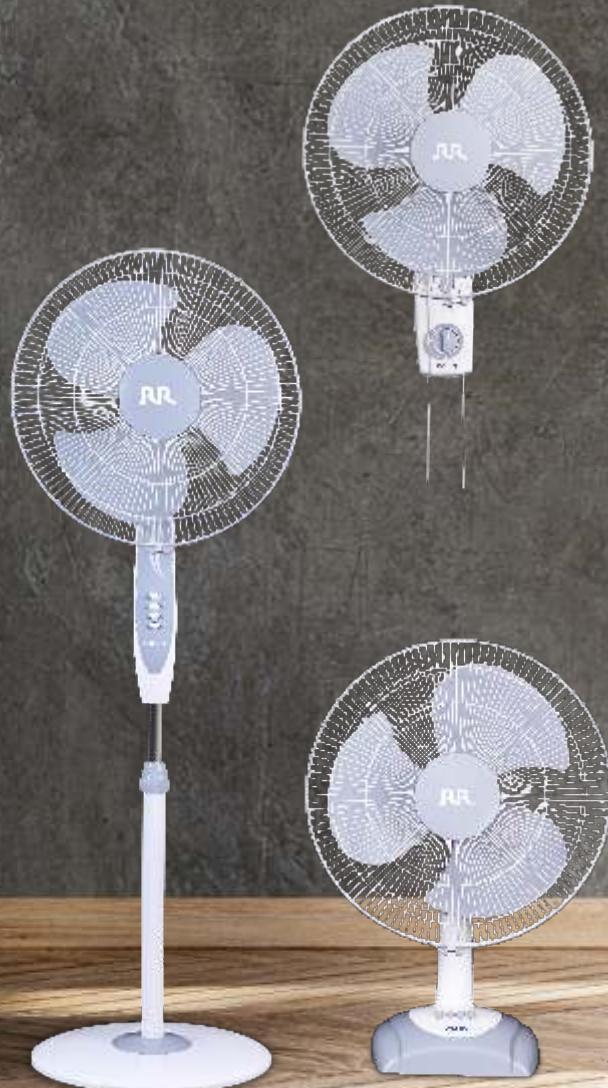

TPW Fan

CALID

HIGH SPEED

- Powerful motor with high grade copper
- Smooth oscillation for better coverage
- Rust-proof body and blades
- Elegant design
- High speed operation for high air thrust
- High air delivery

SWEET	POWER	SPEED	AD
400 mm	115W	2150 RPM	90m ³ /min
300*mm	100W	2200 RPM	70m ³ /min

*Applicable to Wall fan only

COLOUR: Ash grey White Black



High speed



Full copper motor



Thermal
overload
protection (TOP)



High air delivery



TPW Fan **CALID**

- Powerful motor with high grade copper
- Smooth oscillation for better coverage
- Rust-proof body and blades
- Elegant design
- Silent operation
- High air delivery
- Thermal overload protection*

SWEET	POWER	SPEED	AD
400mm	58W	1330 RPM	70m ³ /min

*Applicable to Wall fan only

COLOUR: ■ Blue



Full copper
motor



90°
oscillation



Silent operation
even on inverter



High
air delivery



TPW Fan GETTO⁺

- Heavy duty motor
- High air thrust
- Heavy base for better stability
- Telescopic height adjustment (700-1000 mm)

SWEET	POWER	SPEED	AD
400 mm	50W	1330 RPM	70m ³ /min

COLOUR: Aqua Marine Sulphur Black Red Black



Full Copper Motor
for product
durability



Jerk-free
oscillation



Silent
Operation even
on inverter



Adjustable
Height[#]



TPW Fan GETTO

- Elegant design to elevate your room decor
- Powder coated guard and polymer ring to protect against corrosion
- Tilt adjustment for adjusting the fan at desired angle
- In-built thermal overload protection for enhanced safety
- Oscillation function for better coverage

SWEEP	POWER	SPEED	AD
400 mm	60W	1350 RPM	70m ³ /min

COLOUR: ■ White



High
air delivery



Aerodynamically
designed blades



3 speed
switch control



Adjustable
height[#]



Full copper
Motor



Thermal overload
protection (TOP)

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.

[#]Applicable to only Pedestal fan



FARRATA



- Heavy Duty Motor
- Thermal Overload Protection for Enhanced Safety
- High Air Thrust with minimal noise
- Telescopic height adjustment
- 3 speed rotary switch control

SWEET	POWER	SPEED
500mm	150W	1400 RPM



Full copper
motor



High
air delivery



Thermal Overload
Protection (TOP)

Also Available "Oscillating Farrata Fan"

FARRATA LX



- Heavy duty motor
- High air thrust
- Heavy base for better stability
- Telescopic height adjustment (700-1000 mm)

SWEET	POWER	SPEED
500mm	150W	1400 RPM



Full copper
motor



Adjustable
height



GYROS II



- High air thrust for instant relief
- Heavy base for better stability
- Heavy duty motor

SWEEP	POWER	SPEED	AD
450 mm	100W	2400 RPM	110 m ³ /min



High Speed
@2400 rpm



Full copper
motor



High Air
Thrust




Ventilation Fans



Ventilation
Fan

OXYBREEZ



- PP blades designed for powerful suction
- Auto dust protection louvres to protect from foreign objects like birds
- Suitable for washrooms/bathrooms

SWEET	POWER	SPEED	AD	DUCT SIZE
6 in	24 W	1350 RPM	330 m ³ /hr	174x174mm
8 in	32 W	1300 RPM	570 m ³ /hr	245x245mm
10 in	40 W	1300 RPM	750 m ³ /hr	317x317mm



Auto dust
protection louvres



Powerful
Air Suction



Easy
Clean

OXYFLO GRL



- Innovative modern design suitable for best interiors
- Bird screen for protection against birds and foreign matter
- Easy to mount; can be mounted on glass panel

SWEET	POWER	SPEED	AD	DUCT SIZE
4 in	15 W	2400 RPM	140 m ³ /hr	109 Ø mm
6 in	20 W	2000 RPM	275 m ³ /hr	150 Ø mm
8 in	42W	1800 RPM	570 m ³ /hr	200 Ø mm



Silent
Performance



Easy
Clean



Powerful
Air Suction

OXYBREEZ LDBX / LDBX HS



- Suitable for store room, kitchen and bathroom
- Front guard for protection against birds and foreign matter
- Metal blade with powder coated finish for longer life

SWEEP	POWER	SPEED	AD	DUCT SIZE
9 in	45 W	1370 RPM	600 m ³ /hr	233x 233mm
12 in	65 W	1370 RPM	1000 m ³ /hr	317x317mm
9 in (HS)	70 W	2400 RPM	800 m ³ /hr	233x 233mm
12 in (HS)	90 W	2200 RPM	1600 m ³ /hr	317x317mm



Powerful
Copper Motor



Powerful
Air Suction



Guard

OXYBREEZ LDEX



- Suitable for kitchen
- Front guard for protection against birds and foreign matter
- Metal blade with powder coated finish for longer life
- Rubberized foundation for reduced vibrations

SWEEP	POWER	SPEED	AD
9 in	45 W	1400 RPM	750 m ³ /hr
12 in	70 W	1400 RPM	1600 m ³ /hr



Powerful
Copper Motor



Powerful
Air Suction



Industrial Fans

HEAVY DUTY EXHAUST FAN



- Aerodynamically designed metal blades for higher air delivery
- Anti-corrosive treatment and attractive metallic finish
- 4 blade with double ball bearing motor

SWEEP	POWER	SPEED	AD
300*mm	100 W	1400 RPM	2000 m ³ /hr
380 mm	150 W	1400 RPM	4000 m ³ /hr
450 mm	375 W	1400 RPM	6200 m ³ /hr
600 mm	480 W	900 RPM	10400 m ³ /hr

*Available in Single Phase only

Available in Single and Three Phase



Heavy Duty
Copper Motor



Powerful
Air Suction



Note: Warranty for 450mm HDEX
is 2 years

AIR CIRCULATOR



Pedestal Fan

Wall Mounted Fan

- Heavier base to ensure absolute stability
- 90° oscillation for wider coverage
- Completely enclosed heavy duty energy efficient motor with double ball bearing for longer life.

SWEEP	POWER	SPEED	AD
450mm	100 W	1400 RPM	10000 m ³ /hr
600mm	200W	1400 RPM	16000 m ³ /hr
750mm	300 W	1400 RPM	23000 m ³ /hr

Available in Single Phase and Three Phase only



Heavy Duty
Copper Motor



High
air delivery



COMFORT
in a new light



"We bring to you an exceptional and extensive range of LED Lighting products to suit every requirement across Residential, Commercial, Institutional & Industrial sectors. The range spectrum spreads across Bulbs, Battens, Panels, Down-lighters, Floodlights, Streetlights, High-Bays. Each one is perfectly crafted to help you beautifully illuminate your home, office, or outdoor space."

LED Bulb





LED EMERGENCY BULB - AVIDITE

9W | 12W



LED Bulb

- Overcharging and deep discharge protection
- Inbuilt charging circuit for battery
- Charging Time: 10 hrs (Full Charge)
- Emergency backup time - up to 3.5 to 4Hrs max.
- Battery type - Li-on, 3.7V, 2200 mAh



High Power
backup



Eco-
friendly



Uniform Light
Distribution



Long Battery
Life

APPLICATION



Hotels



Residential



Offices



Malls

Input Power	Size(mm) ØxH	Beam Angle	PF	Lumen*
9W	70x140	120°	>0.95	900
12W	70x140	120°	>0.95	1150

* Lumen may vary as per colour.



LED HIGH BEAM 2 STAR BULB - AVIDITE Plus

5W | 8W | 10W | 12W | 15W | 19W



- High brightness
- Wide operating voltage
- No glare
- Non-dimmable

LED HIGH BEAM 2 STAR BULB - AVIDITE Plus

Input Power	Size(mm) ØxH	Beam Angle	PF	Lumen*
5W	60x111	210°	>0.9	500
8W	60x111	210°	>0.9	800
10W	60x111	210°	>0.9	1000
12W	65x120	210°	>0.9	1200
15W	65x125	210°	>0.9	1500
19W	65x151	210°	>0.9	1900

* Lumen may vary as per colour.

LED HIGH BEAM 3 STAR BULB - AVIDITE DLX

Input Power	Size(mm) ØxH	Beam Angle	PF	Lumen*
9W	60x111	210°	>0.9	945

APPLICATION



Hotels



Residential



Offices



Malls



LED CLASSIC BULB - AVIDITE

3 W | 5W | 7W | 9W | 12W | 14W | 18W | 23W



- High brightness
- Instant start
- Eco-friendly
- No glare
- Wide operating voltage
- Non dimmable

Input Power	Size(mm) ØxH	Beam Angle	PF	Lumen
3W	50x90	120°	0.9	315
5W	57x101	120°	0.9	525
7W	57x101	120°	0.9	735
9W	57x101	120°	0.9	945
12W	60x101	120°	0.9	1260
14W	65x122	120°	0.9	1470
18W	75x141	120°	0.9	1890
23W	80x154	120°	0.9	2415

APPLICATION



Hotels



Residential



Offices



Malls

LED NIGHT LAMP - AVIDITE

0.5 W



- Ultra bright SMD LED
- High stability, long life span
- High lumen efficacy
- Plug in type fitment

Input Power	Size(mm) ØxH	Beam Angle	Colour	Base
0.5W	45x70	270°	White	B-22
			Red	
			Yellow	
			Blue	
			Green	

MULTICOLOUR BULB - AVIDITE

0.5 W



- Ultra bright SMD LED
- High stability, long life span
- High lumen efficacy
- Plug in type fitment

Input Power	Size(mm) ØxH	Beam Angle	Colour	Base
0.5W	45x70	270°	CDL, NW	B-22
			WW	
			Red	
			Green	
			Blue, Pink	

LED PLUGGY BULB - AVIDITE

0.5 W



- Ultra bright SMD LED
- High lumen efficacy
- High stability, long life span

Input Power	Size(mm) ØxH	Beam Angle	Colour
0.5W	45x75	270°	White
			Red
			Yellow
			Blue
			Green
			Pink
			Orange

LED Tube Light





LED INTEGRATED TUBE LIGHT - SWANK / SWANK Plus

5W | 9W | 20W | 22W | 24W



- Efficient optical system for good quality lighting
- High brightness
- Eco friendly-mercury free
- Instant start
- Non dimmable
- Elegant design
- No uv/ir
- Wide operating voltage
- Easy installation (clamp based)
- IP20
- No glare

LED
Tube Lights

APPLICATION



Hotels



Residential



Offices



Malls

Product Name	Input Power	Size (mm)	Beam Angle	PF	Lumen @6500K*	Type
Swank	5W	300	120°	0.9	500	Plastic
Swank	9W	600	120°	0.9	900	Plastic
Swank	20W	1135	120°	0.9	2000	Plastic
Swank	22W	1135	120°	0.9	2200	Plastic
Swank	24W	1135	120°	0.9	2400	Plastic
Swank Plus	20W	1100	120°	0.9	2000	Plastic

* Lumen may vary as per colour.

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.



ALUMINUM LED BATTEN LIGHT - SWANK

36W



- High brightness
- Wide operating voltage
- No glare
- IP20
- Eco-friendly
- Instant start
- Non dimmable
- Easy installation (clamp based)

Input Power	Size (mm)	Beam Angle	PF	Lumen @6500K*	Type
36W	1185	120°	≥0.9	3600	Aluminium

* Lumen may vary as per colour.

APPLICATION



Hotels



Residential



Offices



Malls

LED Batten Light - SWANK

30W



- High brightness
- Wide operating voltage
- No glare
- IP20
- Eco-friendly
- Instant start
- Non dimmable
- Easy installation (clamp based)

Input Power	Size (mm)	Beam Angle	PF	Lumen @6500K*	Type
30W	1185	120°	≥0.9	3000	Plastic

* Lumen may vary as per colour.

APPLICATION



Hotels



Residential



Offices



Malls



LED COLOUR BATTEN LIGHT - SWANK Plus

20W



- High brightness
- Wide operating voltage
- No glare
- IP20
- Eco-friendly
- Instant start
- Non dimmable
- Easy installation
(clamp based)

Input Power	Size (mm)	Beam Angle	PF	Lumen	Type	Colour
20W	1100	120°	≥0.9	NA	Plastic	Red, Blue Green, Pink

APPLICATION



Hotels



Residential



Offices



Malls



LED Down Light



RECESSED LED DOWNLIGHT - DEVIANT

3W | 5W | 7W



- No Glare
- Eco-friendly
- No UV/IR
- Wide Beam Angle

Product Name	Input Power	Operating Voltage Range	Power Factor	CRI	Lumen (lm)	Size-ØxH (mm)	Cut out Dia (mm)	Beam Angle
Deviant J	3W	100-300V AC -50Hz	>0.9	>80	210 lm* @6500K	78x31	Ø42	120°
Deviant S	5W	100-300V AC -50Hz	>0.9	>80	425 lm* @6500K	110x56	Ø72	120°
Deviant S	7W	100-300V AC -50Hz	>0.9	>80	595 lm* @6500K	110x56	Ø72	120°

• Color Available: Red, Green, Blue, Pink, WW, NW, CDL.

* Lumen may vary as per colour.

APPLICATION



Hotels



Residential



Offices



Malls



RECESSED JUNCTION BOX LED DOWNLIGHT - DEVIANT J

6W | 8W | 12W | 15W



- Fits perfectly in junction box & False low ceiling
- Easy installation
- Instant flicker free start
- Ideal for living room, bedroom, Hallway, small shops, kitchen, garage



High CRI



Only for
Indoor



Anti-Glare
Diffuser



Non-
Dimmable

APPLICATION



Hotels



Residential



Offices



Malls

Input Power	Operating Voltage Range	Lumen (lm)	COD (Ø) (mm)	Size-ØxH (mm) (with spring)	CRI	Beam Angle	PF	THD
6W	100~300V AC- 50Hz	600 lm* @6500K	46	90 x 66.5	80	120°	0.90	25%
8W	100~300V AC- 50Hz	800 lm* @6500K	46	90 x 66.5	80	120°	0.90	25%
12W	100~300V AC- 50Hz	1200 lm* @6500K	46	140 x 68	80	120°	0.90	25%
15W	100~300V AC- 50Hz	1500 lm* @6500K	46	140 x 68	80	120°	0.90	25%

• Color Available: Red, Green, Blue, Pink, WW, NW, CDL.

* Lumen may vary as per colour.



SURFACE CABINET LED DOWNLIGHT - MINTO

3W



- Ultra slim and sleek profile
- Uniform light throw, thus no dark spot
- Easy and secure installation with front Mount screws (caps provided)
- Ideal for cabinets, modular kitchens & showcases

Input Power	Operating Voltage Range	Working Temperature	Lumen (lm)	Size-ØxH (mm)	Beam Angle
3W	150-300V AC -50Hz	150-300V AC -50Hz	200 lm* @6500K	60x16.6	120°

- Color Available: Red, Green, Blue, Pink, WW, NW, CDL.

* Lumen may vary as per colour.

APPLICATION



Hotels



Residential



Offices



Malls



SWIVEL SPOTLIGHT - LIMPIAR

3W | 6W | 9W | 12W



APPLICATION



Wardrobes



Shelf
Lighting



Furniture
lighting



Hotels



Malls



Modern Gym

- Long Life 25,000 hrs[#]
- Sharp Beam Angle
- Adjustable

Input Power	Operating Voltage Range	Lumen (lm)	COD (mm)	Size-ØxH (mm)	Material	Beam Angle
3W	100~300V AC- 50Hz	240lm* @6500K 225lm* @4000K 210lm* @3000K	54	75x44	PC	120°
6W	100~300V AC- 50Hz	540lm* @6500K 510 lm* @4000K 480lm* @3000K	67	95x48	PC	120°
9W	100~300V AC- 50Hz	810lm* @6500K 765lm* @4000K 720lm* @3000K	88	117x52	PC	120°
12W	100~300V AC- 50Hz	1080lm* @6500K 1020lm* @4000K 960lm* @3000K	112	140x55	PC	120°

* Lumen may vary as per colour.

- Color Available: WW, NW, CDL.

[#] At 25°C (32°C)

LED RECESSED ROUND SPOT LIGHT - LIMPIAR S

2W



- High brightness
- Instant start
- Non dimmable
- Long life upto 50,000hrs

Input Power	Operating Voltage Range	Lumen (lm)	COD (Ø) (mm)	Size-ØxH (mm)	Material	Beam Angle
2W	100~300V AC-50Hz	140 lm*	33	39x16	PC	60°

- Color Available: Red, Green, Blue, WW, NW, CDL.

* Lumen may vary as per colour.

APPLICATION



Wardrobes



Shelf Lighting



Furniture lighting



Hotels



Malls




Modern Gym

LED Panel Light



FRAMELESS SURFACE PANEL - ARDENT

6W | 12W | 15W | 18W | 24W

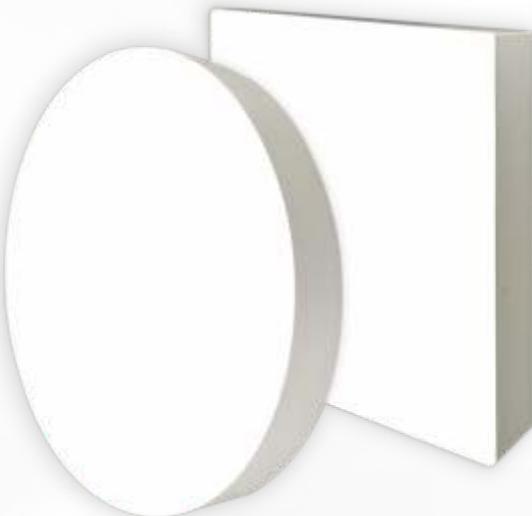

- Unique zero bezel design for premiumness.
- 2835 type chip for high brightness, low decay, flicker free uniform and bright light.
- Environment friendly: no IR and UV radiation, no mercury and hazardous substance.
- Frosty diffuser for effecting angle of refraction for better illumination.

Input Power	Operating Voltage Range	Lumen (lm)	Size-ØxH (mm)	Beam Angle
6W	100-300V AC -50Hz	480 lm* @6500K	90 x 25	120°
12W	100-300V AC -50Hz	960 lm* @6500K	120 x 25	120°
15W	100-300V AC -50Hz	1200 lm* @6500K	156 x 25	120°
18W	100-300V AC -50Hz	1440 lm* @6500K	156 x 25	120°
24W	100-300V AC -50Hz	1920 lm* @6500K	190 x 25	120°

• Color Available: WW, NW, CDL.

* Lumen may vary as per colour.

APPLICATION



Hotels



Residential



Offices



Malls

LED INTEGRATED PLASTIC PANEL - SPRUZZO

5W | 8W | 12W | 15W | 20W



APPLICATION



Hotels



Residential



Offices



Malls

- Durable thermally conductive plastic housing.
- Eye protection provided by acrlayic diffuser.
- Protection against - open circuit voltage, short circuit voltage.
- Wide beam angle, no flickering, soft light design to protect your eyes.
- Inbuilt LED driver.
- Space saving design.
- High lumen efficacy.
- 3.0 KV surge protected.

Input Power	CCT	Lumen* (lm)	Size-LxH (mm)	COD (mm)	PF	CRI
5W	3000-6500K	350	82x36	60	>0.9	> 80
8W [#]	3000-6500K	640	116x36	96	>0.9	> 80
12W [#]	3000-6500K	1200	166x36	145	>0.9	> 80
15W [#]	3000-6500K	1500	166x36	145	>0.9	> 80
20W [#]	3000-6500K	1900	220x36	201	>0.9	> 80

To convert to surface panel, Ring also available for 8W, 12W, 15W and 20W Spruzzo Panel

* Lumen may vary as per colour.

LED SLIM PANEL LIGHT - ZUIVER

6W | 12W | 15W | 18W



- Durable thermally conductive plastic housing.
- Inbuilt led driver.
- Eye protection provided by acrlayic diffuser.
- Space saving design.
- Ultra slim construction.
- 3.0 KV surge protected.
- Protection against - open circuit voltage, short circuit voltage.
- Wide beam angle, no flickering, soft light design to protect your eyes.

Input Power	Size(mm) LXWxH	COD	PF	CCT	CRI	Lumen* @6500K
6W	120x120x27	104	>0.9	3000 - 6500K	>80	390
12W	174x174x27	154	>0.9	3000 - 6500K	>80	840
15W	225x225x27	205	>0.9	3000 - 6500K	>80	1050
18W	225x225x27	205	>0.9	3000 - 6500K	>80	1260

* Lumen may vary as per colour.

APPLICATION



Hotels



Residential



Offices



Malls



LED SLIM PANEL LIGHT - RAVISH

3W | 6W | 9W | 12W | 15W | 18W



- Pressure die cast aluminium alloy housing for effective thermal management.
- More than 90% power factor HPF, 80% energy saving with low power consumption.
- Wide beam angle, no flickering.
- Environmentally friendly, no interference, no hazardous substances.
- Eye protection provided by acrlayic diffuser.
- Ultra slim construction.
- Protection against - open circuit voltage, short circuit voltage.
- Space saving design.
- 3.0 KV surge protected.

APPLICATION



Hotels



Residential



Offices




Malls

Input Power	Size(mm) LxWxH	COD	Beam Angle	PF	CCT	CRI	Lumen @6500K
3W	85x85x20	70	104	>0.9	3000-6500K	>80	170
6W	120x120x25	105	154	>0.9	3000-6500K	>80	430
9W	120x120x25	105	205	>0.9	3000-6500K	>80	650
12W	170x170x25	155	205	>0.9	3000-6500K	>80	860
15W	170x170x25	155	205	>0.9	3000-6500K	>80	1080
18W	225x225x25	200	205	>0.9	3000-6500K	>80	1300

2x2 SLIM PANEL LIGHT - ARDENT

36W

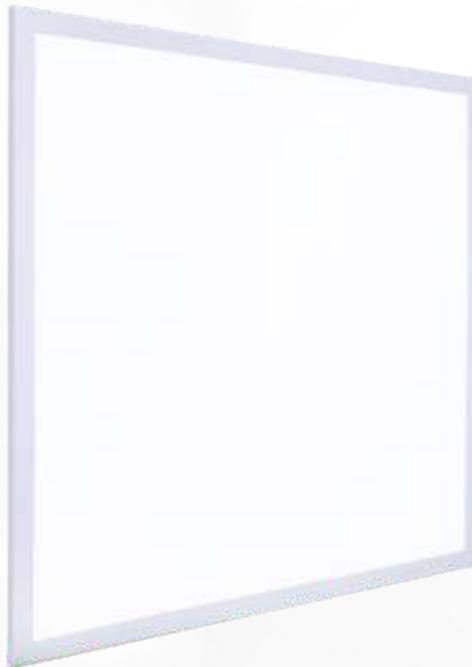

- Low power consumption
- No glare - soothing to eye
- Excellent colour rendering
- No harmful UV & IR radiation
- Aesthetically appealing



Ultra slim



No Glare



No UV/IR



Eco-friendly

Input Power	Operating Voltage	Operating Frequency	PF	Size (LxW) mm	Depth (mm)	Lumen Frequency	Lumen*
36W	100-300 V	50Hz	>0.9	595x595	32	110 lm/W	3960 lm

APPLICATION



Hotels



Residential



Offices



Malls

CRI	Colour Temperature	Beam Angle	Driver	Surge	THD	Operating Temperature	Mounting Type
80	6500 K	120°	Isolated Type	Withstand 4kV	10%	-10°C to 45°C	Recess

* Lumen may vary as per colour.

LED Strip Light




LED STRIP LIGHT - LUCENT

24 W



COLOURS AVAILABLE



- Easy installation, Safe, Convenient & Maintenance free.
- Eco Friendly - mercury free and no UV/IR.
- Easy to make patterns & designs
- Long life 50,000 hrs*

Input Power	Input Voltage	LED	CRI	Lumen*
24W	220-240VAC, 50Hz	60LED/m	>80	2000

* Lumen may vary as per colour.

APPLICATION



Facade



Signage



Reception Area



Corridors

RECOMMENDED USAGE : Indoor Decorative Lighting

LED ROPE LIGHT - LUCENT



COLOURS AVAILABLE



Light Output
400lm/mtr



45 meter
length



60 LED/
meter



Rating withstands
harsh weather

Input Voltage	LED	Dimension	Lumen*
220-240VAC 50Hz	60LED/ Mtr	L:45,000mm, W:8mm H:6mm	400lm/ Mtr

* Lumen may vary as per colour.

APPLICATION



Facade



Balcony



Festive Decoration



Corridors

LED STRIP LIGHT - LUCENT Plus



COLOURS AVAILABLE

6500K | 4000K | 3000K

RED | GREEN | BLUE | PINK



Light Output
700lm/mtr 10 meter
length 120 LED/
meter Rating withstands
harsh weather

Input Voltage	LED	Dimension	Lumen*
220-240VAC 50Hz	120LED/ Mtr	L:10,000mm, W:12.5mm H:5.5mm	700lm/ Mtr

* Lumen may vary as per colour.

APPLICATION



Facade



Signage



Reception Area



Corridors

RECOMMENDED USAGE : Indoor Decorative Lighting

LED ROPE LIGHT - LUCENT Mini



COLOURS AVAILABLE

6500K | 4000K | 3000K

RED | GREEN | BLUE | PINK



Light Output
400lm/mtr 10 meter
length 60 LED/
meter Rating withstands
harsh weather

Input Voltage	LED	Dimension	Lumen*
220-240VAC 50Hz	60LED/ Mtr	L:10,000mm, W:8mm H:6mm	400lm/ Mtr

* Lumen may vary as per colour.

APPLICATION



Facade



Balcony



Festive Decoration



Corridors

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.





LED Industrial Light

LED ECONOMY HIGH WATTAGE - AVIDITE

30W | 40W | 50W



- High brightness
- IC based driver
- Wide operating voltage
- High surge protection
- Instant start
- High lumen efficacy
- Eco-friendly
- THD<20%
- No glare
- Non dimmable

Input Power	Size(mm) ØxH	Beam Angle	PF	Lumen*
30W	100x151	180°	0.9	3000
40W	117x167	180°	0.9	4000
50W	139x189	180°	0.9	5000

* Lumen may vary as per colour.

APPLICATION



Hotels Industry



Offices



Malls

LED SMD ECO HI BAY LIGHT

50W | 80W | 100W | 150W | 180W | 200W



- Excellent Lampshade design Greatly improves Light, Utilization and Evenness
- Elegant Design
- High Efficiency

Input Power	CCT	CRI	Lumen*
50W	3000-6500K	70	5000
80W	3000-6500K	70	8000
100W	3000-6500K	70	10000
150W	3000-6500K	70	15000
180W	3000-6500K	70	18000
200W	3000-6500K	70	20000

* Lumen may vary as per colour.

APPLICATION



Workshop



Warehouses



Railway
Terminals



Industry



LED STREET LIGHT WITH LENS - SUPREMUS

20W | 25W | 30W | 40W | 60W | 90W | 100W



High
Brightness



Non
Dimmable



Eco-
friendly



No Glare

Input Power	CCT	CRI	Beam Angle	Lumen*	IP
20W	6500K	80	120°	2000	IP 66
25W	6500K	80	120°	2500	IP 66
30W	6500K	80	120°	3000	IP 66
40W	6500K	80	120°	4000	IP 66
50W	6500K	80	120°	5000	IP 66
80W	6500K	80	120°	8000	IP 66
100W	6500K	80	120°	10000	IP 66

* Lumen may vary as per colour.

APPLICATION



Workshop



Warehouses



Railway
Terminals



Industry



LED SMD CLASSIC FLOOD LIGHT - CALIDUM

30W | 50W | 80W | 100W



- High lumen efficacy.
- Protection against open circuit voltage, short circuit, over voltage, reverse polarity, under voltage over temperature.
- Pressure die cast aluminium alloy housing for effective thermal management.



120°
Beam Angle



Long Life
50,000 hrs**

APPLICATION



Garden
lighting



Factory
lighting



Warehouses



Industry

Input Power	Input Voltage	Lumen(Im)* @CDL	CRI	PF	IP
30W	220-240VAC, 50Hz	3000	>80	>0.95	IP66
50W	220-240VAC, 50Hz	5000	>80	>0.95	IP66
80W	220-240VAC, 50Hz	8000	>80	>0.95	IP66
100W	220-240VAC, 50Hz	10000	>80	>0.95	IP66

TECHNICAL FEATURES

Luminous flux :

The luminous flux describes the quantity of light emitted by a light source. The luminous efficiency is the ratio of the luminous flux to the electrical power consumed (lm/W). It is a measure of a light source's economic efficiency. Unit: Lumen (lm)

Luminous intensity :

The luminous intensity describes the quantity of light that is radiated in a particular direction. This is a useful measurement for directive lighting elements such as reflectors. It is represented by the luminous intensity Distribution curve (LDC). Unit: Candela (cd)

Illuminance :

Illuminance describes the quantity of luminous flux falling on a surface. Relevant standards specify the required illuminance (e.g. EN 12464 "Lighting of indoor workplaces"). Unit: LUX (lx)

Luminance :

Luminance is the only basic lighting parameter that is perceived by the eye. It describes on the one hand a light source's impression of brightness, and on the other, a surface and therefore depends to a large extent on the degree of reflection (color and surface). It is expressed as candelas per square meter (Metric units). Unit: cd/m²

Color Rendering Index (CRI) :

A scale of the effect of a light source on the color appearance of an object compared to its color appearance under a reference light source. A low CRI rating suggests that the colors of objects will appear unnatural under that particular light source.

Color Rendering Index (Ra)	Real Object Color Appearance
Ra < 60	Poor
60 < Ra < 80	Good
80 < Ra < 90	Very Good
90 < Ra < 100	Excellent

Correlated Color Temperature (CCT) :

The color temperature is a specification of the color appearance of a light source, relating the color to a reference source heated to a particular temperature, measured by the thermal unit Kelvin (K).

Color	Color Temperature	Appearance	Association
WW (Warm White)	Upto 3300 K	Raddish	Warm
NW (Neutral White)	3300- 5300 K	White	Neutral
CDL (Cool Day Light)	From 5300 K	Bluish	Cool

Luminaries: A device used to distribute or modify light produced by light sources installed within it.

LED: Abbreviation for light emitting diode. A developing illumination technology which consumes lower energy than similar light sources.

Light: Light is that part of the electromagnetic spectrum that is perceived by our eyes. The wavelength range is between 380 and 780 nm. The cones come on during the day and we see colors, whereas at night the rods take over and we only see shades of grey.

Light source: An electrical device used to produce light, such as ahalogen lamp, a neon tube or an LED.

Beam Angle: The angle of the given photometric body, measured at the half of the maximum light intensity emitted in the main direction of the lightbeam. The angle determines the width of the light cone. Unit: Degree

Lens: Transparent or translucent medium that alters the directional characteristics of light passing through it. Used to shape the light source made of glass, poly carbonate or acrylic.

Reflector : A surface of mirrored glass, painted metal, polished metal or metalized plastic that is shaped to project the beam from a light source in a particular direction. Reflectors may be an integral part of a lamp or they may be part of the Luminaries.


TECHNICAL FEATURES

Parameters	Value
Make	RR
Operating Voltage	160-270V
PF	>0.9/230V ac
THD	<20%, <15%
Luminaire Efficacy	>100lm/W @ 3000K
Color temperature	2700-6500K
CRI	>85
LED Beam Angle	60Deg, 90 Deg, 120 Deg
Frequency	50Hz
Efficiency	>90%/ 230Vac @ full Load
Driver Make	RR/ Phillips/Fullarm/Osram
LED Make	Cree/ Citizens / Nischi / Bridgelux
Surge protection	Indoor 4KV, outdoor 6KV
Burnings life	50000hrs

SMD Surface Mounted Devices

COB Chip On Board

Mounting Description

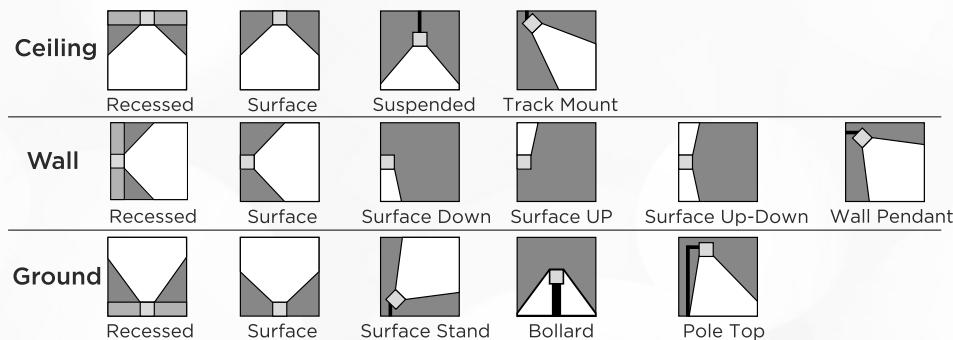

IP INDEX


The Ingress Protection (IP) code denotes the protection against dust, solid objects and moisture provided by the luminaire enclosure. The IP number is defined by a numerical field of two digits placed on the right of the letters IP. The first digit corresponds to the degree of protection against the penetration of dust and solid matter, while the second digit corresponds to the degree of protection against the penetration of liquids.

First digit: degree of protection against solid objects and duct

0. Non protected
1. Protection against solid objects, diameter larger than 50 mm
2. Protection against solid objects, diameter larger than 12 mm
3. Protection against solid objects, diameter larger than 2.5 mm
4. Protection against solid objects, diameter larger than 1mm
5. Duct accumulation protected
6. Duct penetration protected

Second digit: degree of protection against moisture and water

0. Non protected
1. Drip-proof against vertical water drops
2. Drip-proof when tilted at angles up to 150
3. Protection against sprinkled water when falling at angles up to 600
4. Splash-proof
5. Jet-proof
6. Jet-proof, powerful water jet
7. Water immersion for 30 minutes at a depth of 1 meter
8. Water submersion

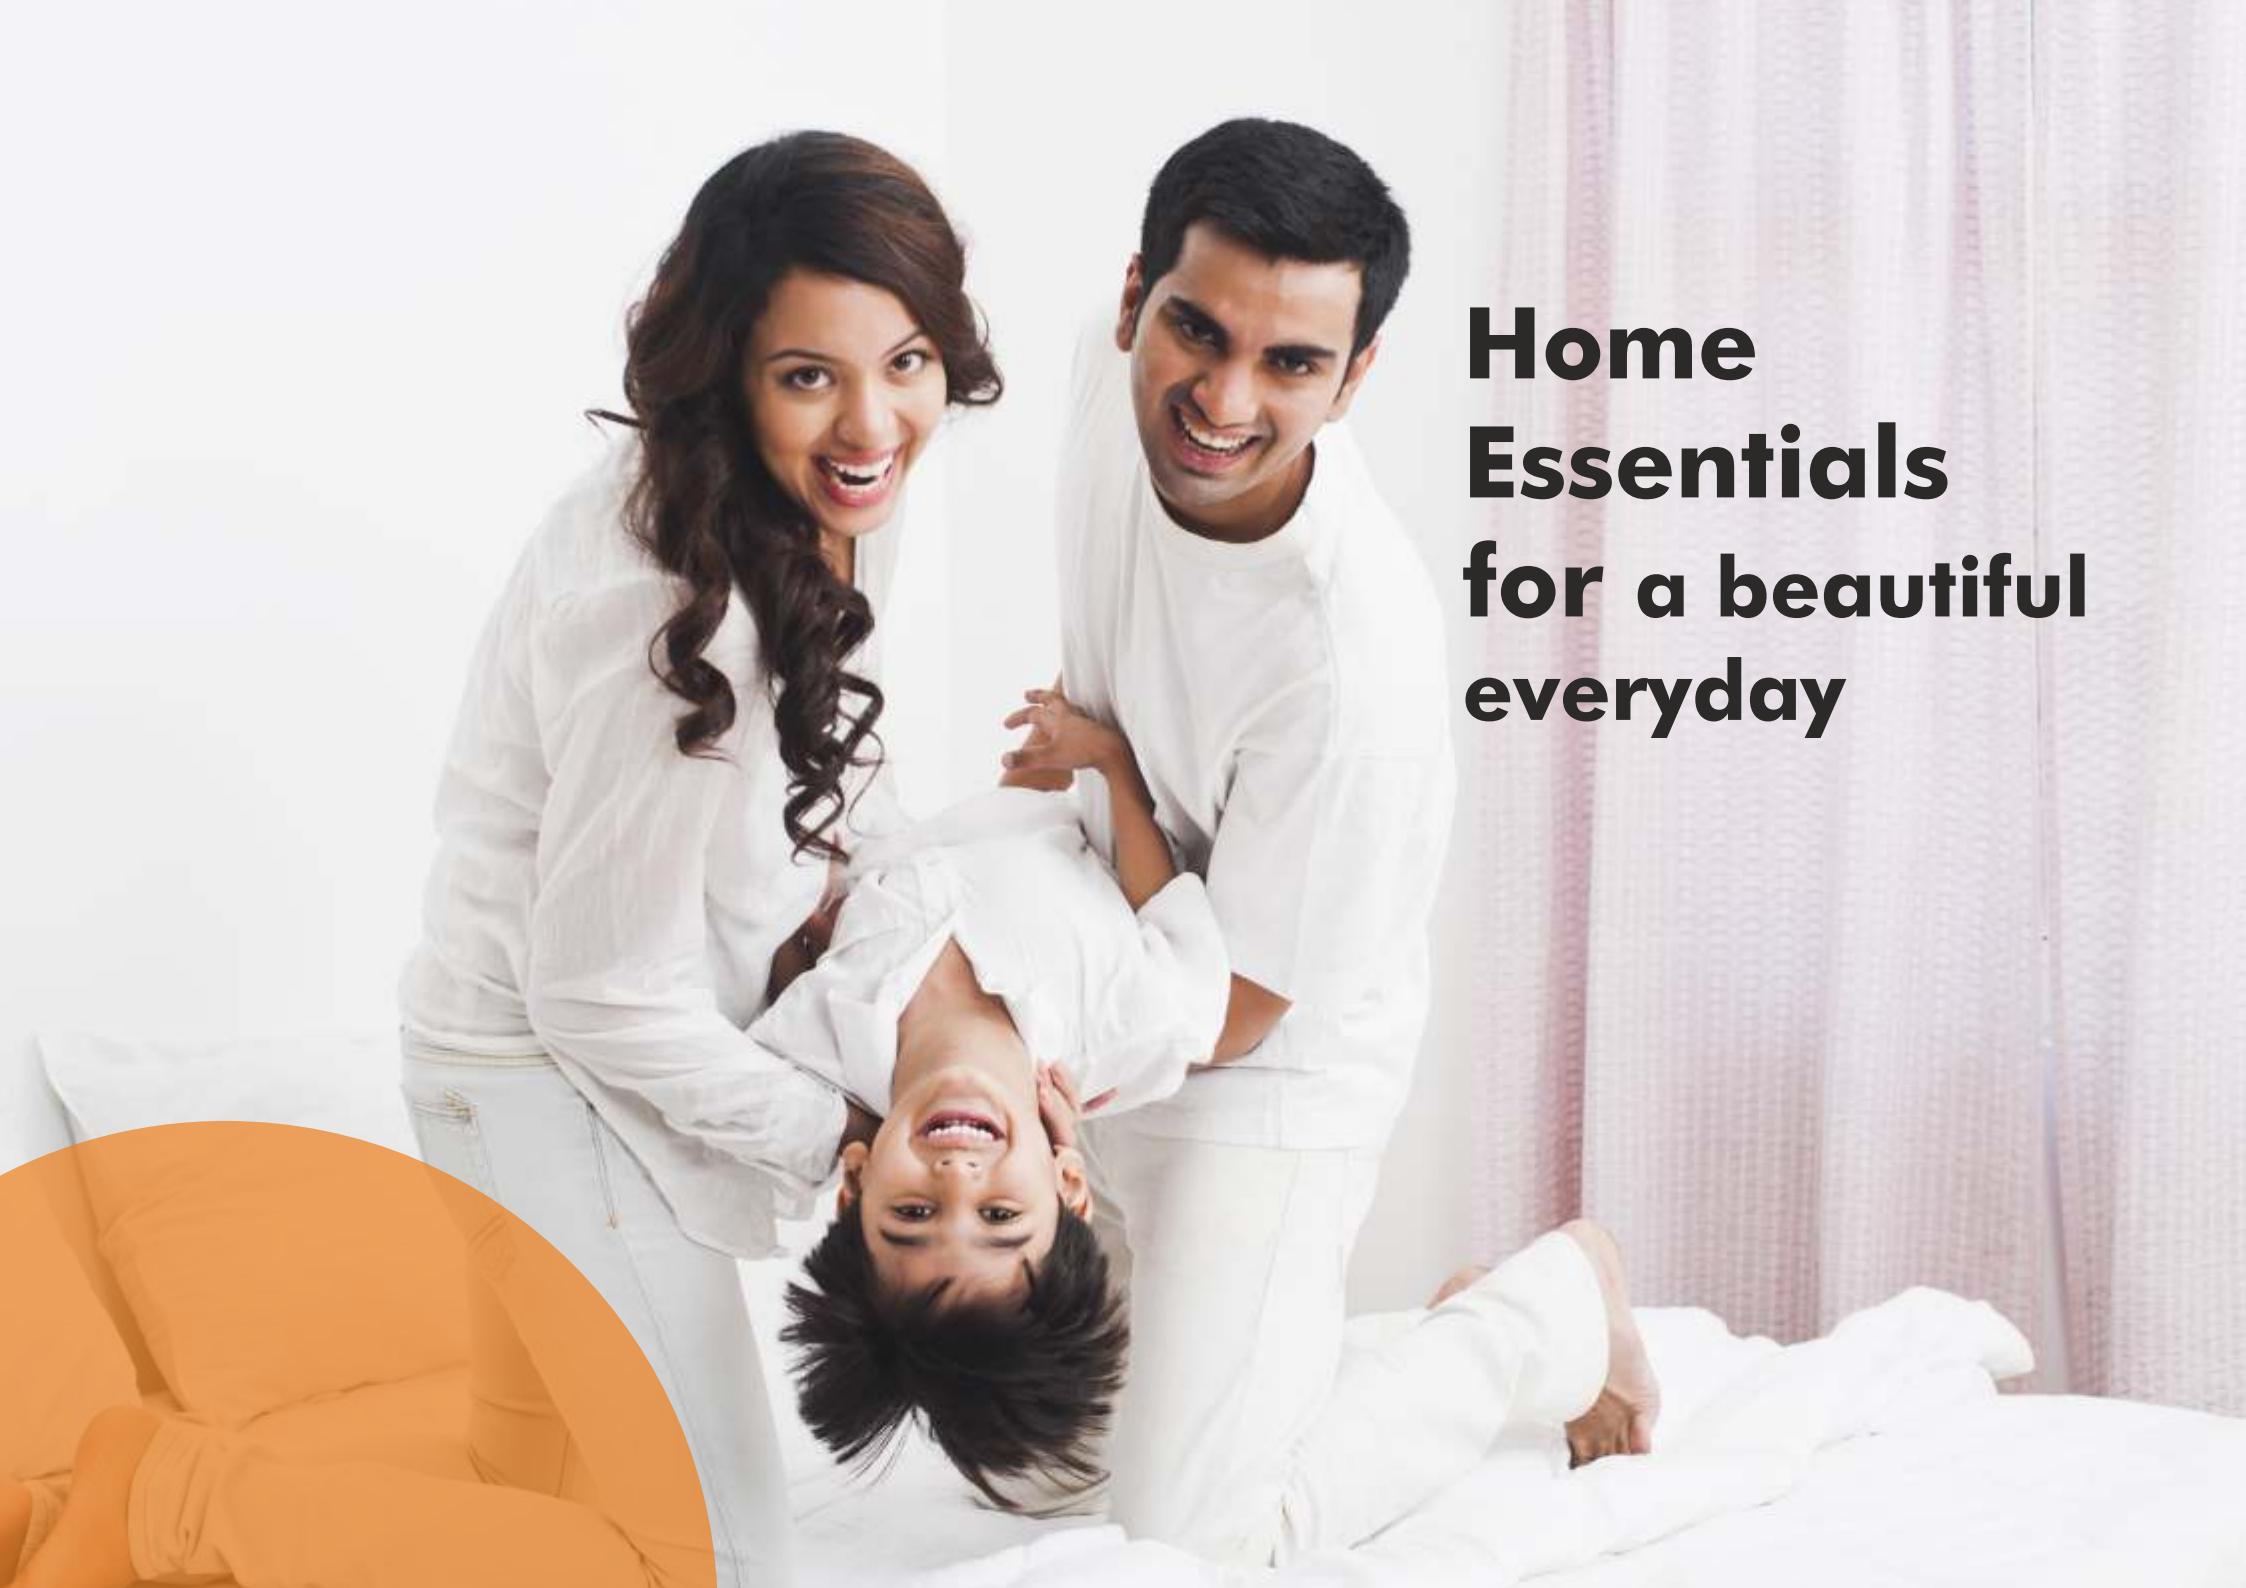

**Home
Essentials
for a beautiful
everyday**

Comfort manifests in not just the big things, but in the small, everyday essentials that help life better. Choose from a wide range of Water Heaters, Room Heaters & Irons, each guaranteed for quality performance, tested by time.

Backed by efficient and earnest customer service, we constantly strive towards coming up with products that help make life comfortable.



WATER
HEATER



Water Heater



STORAGE WATER HEATER

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.

STORAGE WATER HEATER - SUPREMUS+



15 Ltr | 25 Ltr



Digital
Temperature
Display



Magnesium
Anode Rod



Thermal
Cutout



Durable,
Rust Proof
HIPS Body



Highrise
Building



Multi
Functional
Safety Valve




- 4 star bee rating - for low power consumption
- Adjustable temperature knob for convenience
- Suitable for pressure pumps and high rise buildings
- Puf insulation for efficient power consumption
- Auto cut off provided for safety
- Vitreous enameled glass line tank for long life

Voltage	Type	Frequency	Wattage	Rated Pressure
220V	Storage	50Hz	2 KW	8 Bar

PRODUCTS DIMENSIONS

Capacity in Litres	Dimensions (mm)		
	L	W	H
15	330	340	490
25	385	395	550



PRODUCT	2 YEAR
HEATING ELEMENT	2 YEAR
ON TANK	7 YEAR



BEE/RRE/0505/14

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.



Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.

STORAGE WATER HEATER - SUPREMUS GLS

06 Ltr | 10 Ltr | 15 Ltr | 25 Ltr



High-grade
Thermostat



Magnesium
Anode Rod



Multi Functional
Safety Valve



Rust Proof
Body




Vitreous Enamelled
Glass Line Tank
For Long Life

- Suitable for high rise buildings and high pressure pumps
- Safety feature- Multi functional valve, Thermostat, Thermal cutout
- Adjustable temperature control knob

Voltage	Type	Frequency	Wattage	Rated Pressure
220V	Storage	50Hz	2 KW	8 Bar

PRODUCTS DIMENSIONS

Capacity in Litres	Dimensions (mm)		
	L	W	H
6	325	340	415
10	325	340	475
15	325	340	550
25	370	400	600



PRODUCT	2 YEAR
HEATING ELEMENT	2 YEAR
ON TANK	7 YEAR



BEE/RRE/0505/14


Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.



Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.

STORAGE WATER HEATER - CALESCENT

10 Ltr | 15 Ltr | 25 Ltr

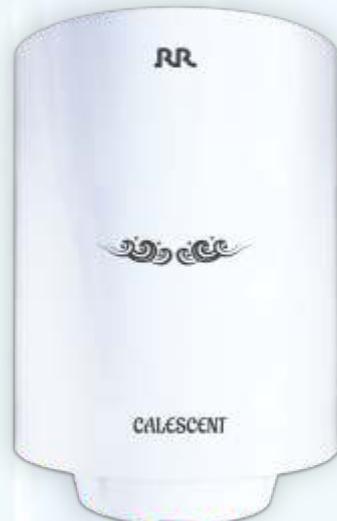

High-grade
Thermostat



Magnesium
Anode Rod



Multi Functional
Safety Valve



Vitreous Enamelled
Glass Line Tank
For Long Life




Metal Body

- Suitable for high rise buildings and high pressure pumps
- Safety feature- Multi functional valve, Thermostat, Thermal cutout
- Adjustable temperature control knob

Voltage	Type	Frequency	Wattage	Rated Pressure
220V	Storage	50Hz	2 KW	8 Bar

PRODUCTS DIMENSIONS

Capacity in Litres	Dimensions (mm)		
	L	W	H
10	317	330	410
15	305	330	550
25	355	375	600




PRODUCT	2 YEAR
HEATING ELEMENT	2 YEAR
ON TANK	7 YEAR



BEE/RRE/0505/14

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.

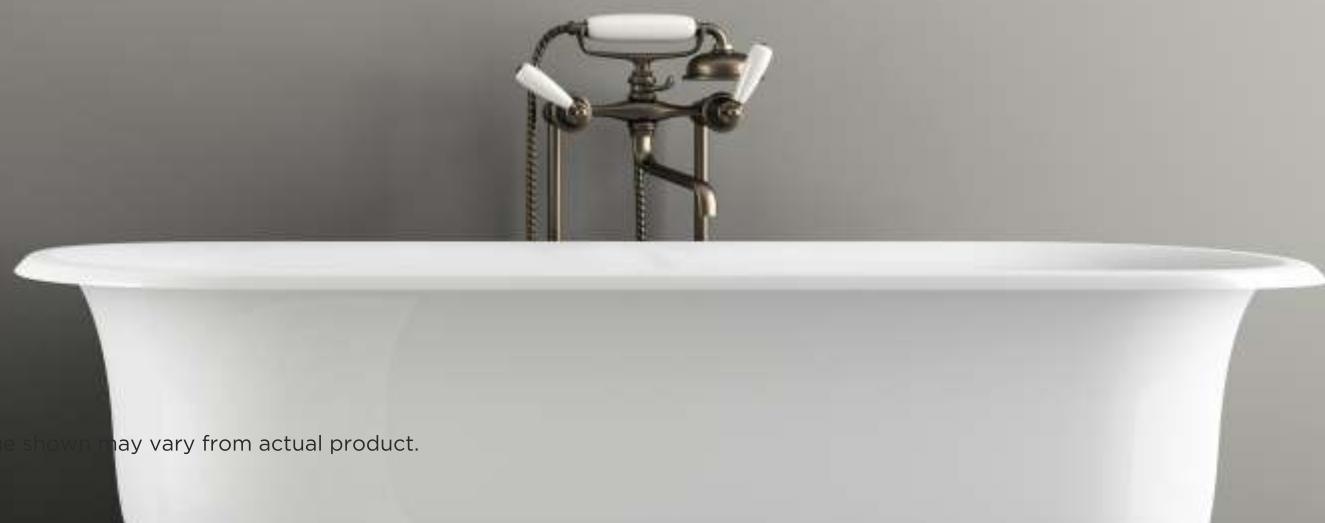

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.

STORAGE WATER HEATER - ARDENT

10 Ltr | 15 Ltr | 25 Ltr

VERTICAL MOUNTING



High-grade Thermostat



Thermal Cutout



Glasswool Insulation



Metal Body



Fusible Plug




Pressure Release Value

- Safety feature - Thermostat & Thermal Cutout, Pressure release valve & fusible plug
- High grade & high gauge stainless steel tank - SS 304 L
- Anti vacuum system
- Powder coated metal body for long life

Voltage	Type	Frequency	Wattage	Rated Pressure
220V	Storage	50Hz	2 KW	3.5 Bar

PRODUCTS DIMENSIONS

Capacity in Litres	Dimensions (mm)		
	L	W	H
10	405	255	510
15	395	305	495
25	432	380	540



PRODUCT	2 YEAR
HEATING ELEMENT	2 YEAR
ON TANK	5 YEAR



BEE/RRE/0505/14

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.



INSTANT WATER HEATER

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.

INSTANT WATER HEATER - RAVISH



03 Ltr



Fire retardant power cord



Weldless SS 304 tank



Rust and shock proof outer body



Capillary thermostat



Dual LED Indicator



Anti Siphon protection

- Fire retardant power cord for maximum safety
- Weldless SS 304 L tank that enhances resistance to corrosion ensuring long tank life
- Rust and shock proof outer body
- Capillary thermostat for higher efficiency
- Leakage proof integrated pressure valve
- Anti Siphon protection designed to prevent any backflow of water and protect the heating element from dry heating
- Disc type thermal cut-out for higher efficiency


Voltage	Type	Frequency	Wattage	Rated Pressure
230V	Instant	50Hz	3 KW	6.5 Bar

PRODUCTS DIMENSIONS

Capacity in Litres	Dimensions (mm)		
	L	W	H
03	202	196	365



PRODUCT	2 YEAR
HEATING ELEMENT	2 YEAR
ON TANK	5 YEAR



Installation Pipes Provided



Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.

INSTANT WATER HEATER - CALID Plus



03 Ltr



High-quality Thermostat



Thermal Cutout



Fusible Plug



Pressure Release Value



LED Indicator




Stainless Steel Tank

- Thermostat, Thermal Cut Out & Pressure Release Valve (PRV) for Safety Purpose
- High Grade & High Gauge Stainless Steel Tank - SS 304 L
- Rust Proof Body

Voltage	Type	Frequency	Wattage	Rated Pressure
230V	Instant	50Hz	3 KW	6.5 Bar

PRODUCTS DIMENSIONS

Capacity in Litres	Dimensions (mm)		
	L	W	H
03	202	196	365



PRODUCT	2 YEAR
HEATING ELEMENT	2 YEAR
ON TANK	5 YEAR



Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.

INSTANT WATER HEATER - CALID Pro

05 Ltr



High-quality Thermostat



Thermal Cutout



Suitable for Low & mid res Buildings



Pressure Release Value



LED Indicator




Stainless Steel Tank

- 3 level Safety Feature - Thermostat and Thermal Cutout and Pressure Release Valve(PRV) for Safety Purpose
- Thick High Grade Stainless Steel (SS - 304L) Weldless Tank
- Rust & Shock-Proof Plastic body
- LED Indicator for Power and Heating

Voltage	Type	Frequency	Wattage	Rated Pressure
230V	Instant	50Hz	3 KW	6.5 Bar

PRODUCTS DIMENSIONS

Capacity in Litres	Dimensions (mm)		
	L	W	H
05	235	225	435

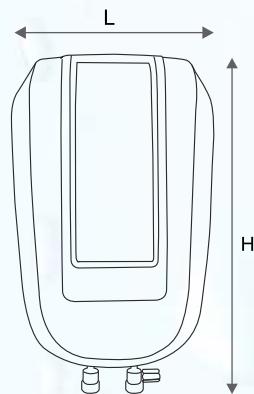

PRODUCT	2 YEAR
HEATING ELEMENT	2 YEAR
ON TANK	5 YEAR



GAS WATER HEATER

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.

GAS WATER HEATER - LPG/PNG



06 Ltr



Copper heat
Exchanger
Tin-plated for
faster heating



3-Row Burner
with double
ignition



Summer / Winter
Mode
Adjustable temperature
control

- Better safety during gas flow with single solenoid valve
- Secondary automatic overheat protection Thermal cutout
- Flame failure device
- Gas leakage protection
- Mesh on water inlet, gas inlet and chimney to avoid scaling, blockage, dry heating and impurities
- Variable pressure Compatibility Suitable for low and high water pressure (upto 8 bar)
- Safety lock To control the ON/OFF operation
- ISI Certified product For safety and quality

Rated Capacity	Rated Heat Input	Frequency	Rated Pressure
6 L/min	10kW	50Hz	LPG- 2900 Pa / PNG-2000 Pa

PRODUCTS DIMENSIONS

Capacity in Litres	Dimensions (mm)		
	L	W	H
06	290	140	490





IMMERSION WATER HEATER

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.

IMMERSION WATER HEATER

1.0 KW | 1.5 KW



- Shock proof handle - complete protection against electric shock
- Water Proof Handle
- Instant heating
- Water level indicator

Voltage	230V
Type	Immersion Heater
Frequency	50Hz
Wattage	1.0 KW / 1.5 KW



- Shock proof bakelite handle
- Power Indicator
- Instant Heating
- Water Level Indicator
- Energy efficient

Voltage	230V
Type	Immersion Heater
Frequency	50Hz
Wattage	1.0 KW / 1.5 KW



Heavy copper heating element



Nickel Plating for Corrosion Resistance



Plastic Shockproof waterproof handle



Neon Indicator



Sturdy Bucket Clip



Replacement Warranty

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.



ROOM HEATER

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.

HEAT CONVECTOR - RH 1

2000 W



- Twin Turbo Design.
- Two Heating Positions.
- Thermal cutout.
- Instant heating.
- Indicator Light.
- Portable.

Voltage	230V
Frequency	50Hz
Wattage	2000 W
Thermal cut-out	Provided
Heating position	1000W / 2000W



Two Heating Positions



Thermal Cutout



Indicator Light



Twin Turbo Motor

HEAT CONVECTOR - RH 2

2000 W



- Twin Turbo Design.
- Two Heating Positions.
- Thermostat & Thermal cutout.
- Instant heating.
- Indicator Light.
- Portable.

Voltage	230V
Frequency	50Hz
Wattage	2000 W
Thermal cut-out	Provided
Heating position	1000W / 2000W



Two Heating Positions



Twin Turbo Motor



Indicator Light



Adjustable Heights

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.

QUARTZ ROOM HEATER

400 / 800W



- Twin Quartz tube for direct heating.
- Safety tip over switch cuts off the heater, in case it tilts or falls.
- Two heat settings- 400 watt/800 watt, for maintaining desired room temperature.

Voltage	230V
Frequency	50Hz
Wattage	400 W / 800 W



Indicator
Light



Switch for heat
setting 400w/800w



Quartz Heating
Tubes

CALID HALOGEN HEATER

2000 W



- Oscillation upto 180° at all heat setting
- Elegant Panel design that matches your Home Décor
- Ideal for use in small room for Instant Heating
- Easy to switch between heat settings and manage oscillation function
- Safety tip over switch that cuts OFF the Heater incase it Tilts or Falls

Voltage	230V
Frequency	50Hz
Wattage	1200 W
Heating Position	400W 800 W 1200 W



Easy Lift
Handle



180° auto
OSCILLATION



3 Heating
rod

Safety Tip
Over Switch





DRY IRON

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.

PROFILE Plus

1000 W



1000
Watt



Replacement
Warranty

ARDENT Plus

1000 W



1000
Watt



Replacement
Warranty

- Weilburger Non Stick Coated Sole Plate for Instant Heating
- Uniform Heat Distribution across the sole plate
- PBT Body with stain resistant, High Strength, tough and stiff characteristics
- Ergonomic stylish handle

- Weilburger non stick coated sole plate for instant heating
- Uniform heat distribution across the sole plate
- Ergonomic stylish handle
- Customize settings for different fabrics



Easy Handle
Grip



360°
Swivel
Cord



Variable
Temperature
Control



Easy Handle
Grip



Indicator
Light



Variable
Temperature
Control

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.



ESTELLA Plus

1000 W



1000 Watt



Replacement
Warranty

SILK FLOW Plus

750 W



750 Watt



Replacement
Warranty

- Weilburger Non Stick Coated Sole Plate for Instant Heating
- Uniform Heat Distribution across the sole plate
- Ergonomic Stylish Design
- Reliable Snap Action Thermostat

- Uniform heating
- Non stick coating
- Ergonomic handle design
- Multiple temperature levels
- Reliable snap-action thermostat



Indicator
Light



Thermal
Cut out



Adjustable
Temperature
Control



Indicator
Light



360°
Swivel Cord



Variable
Temperature
Control

HEAVY WEIGHT Plus

1000 W



**1000
Watt**



**Replacement
Warranty**

- Saves time, while ironing out wrinkles on clothes
- Aluminium alloy sole plate with Weilburger Non Stick Gold Coating
- Safety thermal fuse helps avoid Accidental burns by preventing over-heating.
- ISI safety hallmark by BIS



**Indicator
Light**



**Weilburger
Non Stick Gold
Coated
Sole Plate**



**Thermal
Cut out**



**Adjustable
Temperature
Control**



AIR COOLER



SKYWIND DESERT ROOM AIR COOLER

90 Ltr | 70 Ltr



High
Air throw



Inverter
compatible



Thermal overload
Protection for
motor and Pump



Completely
Collapsible
Louvers



Honeycomb
pad



Multi Directional
Castor Wheels

Tank Capacity	90 Ltrs	70 Ltrs
Voltage	230v/50hz	230v/50hz
Wattage (W)	200	200
Air Throw (ft)	60	60
Air Delivery (m ³ /hr)	4600	4600
Speed (RPM)	1350	1350
Cooling Area(Ft ²)	500	500
Body Material	PP	PP
Product Dimensions in mm (LxBxH)	605x480x1060	605x480x1040



Product
Warranty

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.

CALIDFLOE DESERT ROOM AIR COOLER

70 Ltr | 55 Ltr



High
Air throw



Inverter
compatible



Thermal overload
Protection for
motor and Pump



Ice
Chamber



Honeycomb/
Woodwool pad



Multi Directional
Castor Wheels

Tank Capacity	70 Ltrs	55 Ltrs
Voltage	230v/50hz	230v/50hz
Wattage (W)	200	200
Air Throw (ft)	50	50
Air Delivery (m ³ /hr)	4500	4500
Speed (RPM)	1350	1350
Cooling Area(Ft ²)	400	400
Body Material	PP	PP
Product Dimensions in mm (LxBxH)	590x340x1190	590x340x1150

Note: Available in Honeycomb and Woodwool pad

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.



Product
Warranty

ESTELLA TOWER ROOM AIR COOLER

35 Ltr



High
Air Delivery



Inverter
compatible



Thermal overload
Protection for
motor and Pump



Completely
Collapsible
Louvers



Honeycomb
pad



Multi Directional
Castor Wheels

Tank Capacity	35 Ltrs
Voltage	230v/50hz
Wattage (W)	150
Air Throw (ft)	35
Air Delivery (m ³ /hr)	1350
Speed (RPM)	1400
Cooling Area(Ft ²)	150
Body Material	ABS
Product Dimensions in mm (LxBxH)	355x350x1150



Product
Warranty

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.

ESTELLA PERSONAL ROOM AIR COOLER

25 Ltr



High
Air Delivery



Inverter
compatible



Thermal overload
Protection for
motor and Pump



Completely
Collapsible
Louvers



Honeycomb
pad



Multi Directional
Castor Wheels

Tank Capacity	25 Ltrs (DLX)	25 Ltrs
Voltage	230v/50hz	230v/50hz
Wattage (W)	150	150
Air Throw (ft)	35	35
Air Delivery (m ³ /hr)	1350	1350
Speed (RPM)	1350	1350
Cooling Area(Ft ²)	150	150
Body Material	ABS	PP
Product Dimensions in mm (LxBxH)	460x330x740	460x330x740



Product
Warranty

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.

CALIDFLOE WINDOW ROOM AIR COOLER

50 Ltr



Water Level
Indicator



Inverter
compatible



Thermal overload
Protection for motor



Swing



Woodwool
pad



High
Air Delivery

Tank Capacity	50 Ltrs
Voltage	230v/50hz
Wattage (W)	220
Air Throw (ft)	40
Air Delivery (m ³ /hr)	2000
Speed (RPM)	1280
Cooling Area(Ft ²)	250
Body Material	PP
Product Dimensions in mm (LxBxH)	660x560x550

Note: Trolley sold separately

Disclaimer : Due to continuous product improvements, Product Image shown may vary from actual product.



Product
Warranty



R R Kabel Limited

Corp. Office:

R R Kabel Limited, Ram Ratna House, Oasis Complex, P. B. Marg, Worli, Mumbai, 400 013,
Tel No.: +91-22-24929009 / 24924144

www.rrglobal.com

Customer Care Toll Free No.: 18001032676

Email: customercare@rrglobal.com

Terms & conditions apply.

The products may differ as per catalog due to continuous improvements.

The colour shade of the products shown may differ from the actual products colour due to printing limitations