Project		Catalog #		Type	
Prepared by		Notes		Date	

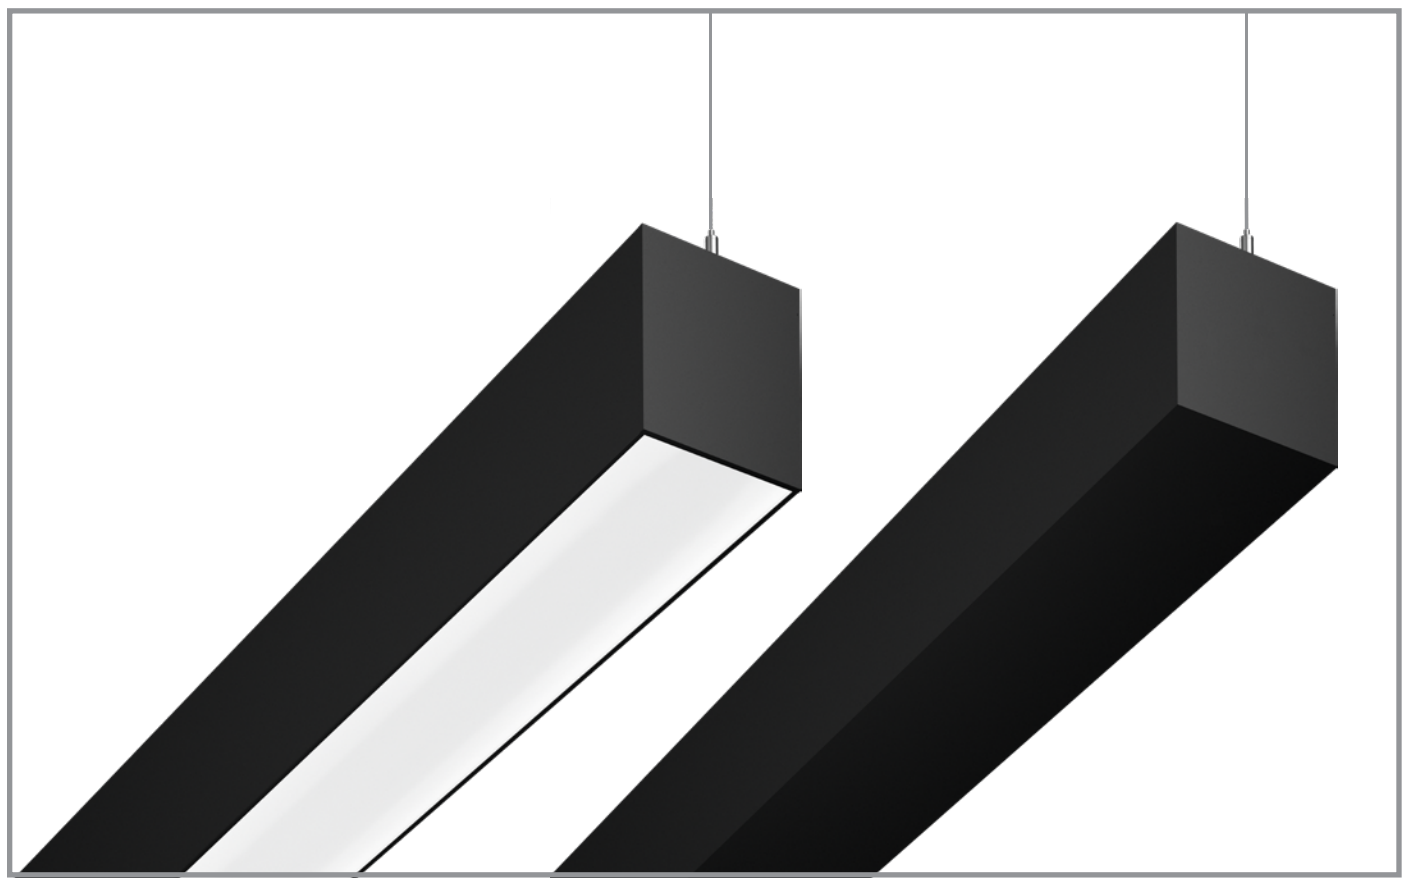

NeoRay

Define | Suspended | 5in

Direct Only
Direct + Indirect
Indirect Only

Typical Applications

Education • Healthcare • Hospitality • Office • Retail • Transit

Interactive Menu

Top Product Features

- Define Suspended family available in 2in, 3in, 4in, and 5in
- Multiple Optic options
- Independently specifiable Direct and Indirect Outputs
- Continuously illuminated straight runs, corners, intersections, and patterns
- Wired and wireless controls
- VividTune and BioUp Technology

Dimensions



Indirect Only Housing



Flush Housing

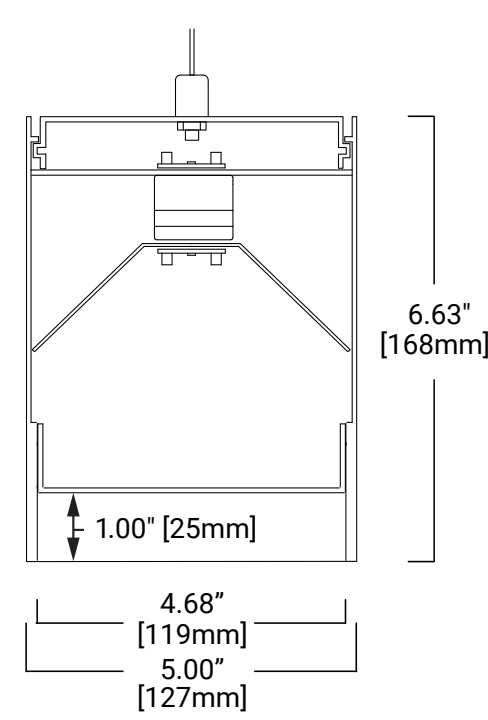

1in Regress Housing

COOPER Lighting Solutions
a Signify business

Order Information

SAMPLE ORDER NUMBER: **S125DIP-C500D300U935-C4T1B-24F0-1-UDD-F4-BM-P**

Icon Key: Grey bar denotes available with 10-Day Quick Spec

Domestic Preference‡	Delivery	Body: Series	Body: Optic Compatibility	Body: Direction & Location	Output: Performance
[Blank] = Standard **BAA** = Buy American Act **BABA** = Build America Buy American Act	**[Blank]** = None **QS** = Quick Spec	**S125** = Define 5	**[Blank]** = Flush Housing **R** = 1in Regress Housing	**DP** = Direct Only Suspended **DIP** = Direct & Indirect Suspended **IP** = Indirect Only Suspended	**C** = Standard **H** = High Performance **V** = VividTune **B** = BioUp
Notes ‡Only product configurations with these prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or the Build America Buy America Act (BABA). BABA is the minimum Government compliance requirement for the Build America Buy America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. Please refer to the DOMESTIC PREFERENCES website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.	**Notes** Grey bar denotes option available with 10-Day Quick Spec	**Notes**	**Notes** Use 1in Regress compatible body for 1in Regress optic with Frosted Lens (F) and Louvers (VL) only. Available with Direct Only (D) and Direct + Indirect (DI) luminaires only.	**Notes**	**Notes** VividTune (V) available by request*

Output (Cont'd): Direct Output	Output (Cont'd): Indirect Output	Output (Cont'd): CRI	Output (Cont'd): CCT	Mounting: Suspension Type	Mounting: Ceiling Type	Mounting: Hardware Color
[Blank] = None **375D** = 375 Lm/ft Direct **610D** = 610 Lm/ft Direct **850D** = 850 Lm/ft Direct **1090D** = 1090 Lm/ft Direct **1270D** = 1270 Lm/ft Direct **_D** = Custom Lm/ft Direct	**[Blank]** = None **365U** = 365 Lm/ft Indirect **590U** = 590 Lm/ft Indirect **810U** = 810 Lm/ft Indirect **1035U** = 1035 Lm/ft Indirect **1205U** = 1205 Lm/ft Indirect **_U** = Custom Lm/ft Indirect	**8** = 80 CRI **9** = 90 CRI **B** = BioUp	**Static** **27** = 2700K **30** = 3000K **35** = 3500K **40** = 4000K **50** = 5000K **VividTune** **2765** = 2600-6500K **3050** = 3000-5000K **BioUp Dynamic** **2750** = 2700-5000K	**C4** = 4ft Aircraft Cable **C10** = 10ft Aircraft Cable **C20** = 20ft Aircraft Cable **S4** = 4ft Stem Mount **S8** = 8ft Stem Mount	**T1** = 15/16in Flat T-Grid **T9** = 9/16in Flat T-Grid **TS** = 9/16in Dimensional T-Grid (Slotted/Interlude) **JB** = J-Box / Structure	**W** = White **B** = Black
Notes Use [Blank] with Indirect Only (IP) luminaire. Specify Lumen Output to the nearest 10Lm/ft: Min = 375Lm/ft | Max = 1,270Lm/ft Performance is based on 3500K 80CRI with Flush Frosted Lens and White housing. Reference Lumen Adjustment Factors table for more detail. Reference BioUp (B) section for output availability.	**Notes** Use [Blank] with Direct Only (DP) luminaire. Specify Lumen Output to the nearest 10Lm/ft: Min = 365Lm/ft | Max = 1,205Lm/ft Performance is based on 3500K 80CRI with No Lens and White housing. Reference Lumen Adjustment Factors table for more detail. Reference BioUp (B) section for output availability.	**Notes** (CRI/CCT) VividTune (V) available with 90CRI 2600-6500K (92765) and 3000-5000K (93050) only. BioUp Static available with 3500K (B35), 4000K (B40), and 5000K (B50) only. BioUp Dynamic available with 2700-5000K (B2750) only. Reference BioUp (B) section for correlated CRI values.		**Notes**	**Notes** All T-Grid options (T1, T9, and TS) are compatible with Flat Lay-In Panels and Tegular Panels	**Notes** Mounting Hardware Color impacts Power Cable, Canopy Cover, and Strain Relief.

Pattern Length: Length	Pattern Length: Max Section Length	Electrical: Circuiting	Electrical: Emergency Options	Electrical: Voltage	Electrical: Wired Controls
2F0 = 2ft **3F0** = 3ft **4F0** = 4ft **5F0** = 5ft **6F0** = 6ft **7F0** = 7ft **8F0** = 8ft **9F0** = 9ft **10F0** = 10ft **11F0** = 11ft **12F0** = 12ft **_F_** = Specify Length	**[Blank]** = Standard **/8** = 8ft Max Section Length	**1** = Single Circuit **2** = Dual Circuit **S** = Secondary Circuit	**[Blank]** = None **E** = Emergency Circuit **B1** = 7W Internal Battery **B2** = 14W Internal Battery **B3** = 6W Internal Battery **T** = UL924 Bypass Relay Device	**U** = Universal (120V-277V) **1** = 120V **2** = 277V **3** = 347V	**DD** = Standard 0-10V (1%-100%) **Other** **5L** = Fifth Light DALI (5%-100%) **LH** = Lutron EcoSystem DALI (1%-100%) **For use with VividTune** **W2A** = 2-Channel 0-10V **For use with Dynamic BioUp** **W2A** = 2-Channel 0-10V **W2D** = 2-Channel DALI
Notes Specify individual luminaire, linear run, or total custom pattern lengths in xft/xin increments (ex. 37F10 = 37ft 10in). Please include the angle for each illuminated corner and intersection when providing sketch/drawing (ex. A045 = 45°). Min fixture length is 2ft. Min fixture length is 3ft for Direct + Indirect (DI) luminaire Nominal lengths. Reference drawings for total length (including end caps). Reference BioUp section for minimum length available with BioUp (B).	**Notes** Use [Blank] to allow for up to 12ft Individual luminaires. Use 8ft Max Section Length (/8) to limit max individual, run, and pattern section lengths to 8ft.	**Notes** Dual Circuit (2) allows for independent Direct and Indirect Circuits. Secondary Circuit (S) allows A/B switching within a run or Pattern (P).	**Notes** Battery and UL924 Bypass Relay Device are available with 120V-277V (U, 1, or 2) only. Battery (B1 and B2) available with 0-10V (DD or W2A) and single Channel DALI (5L or LH) Controls options only. Battery in a 4ft Direct + Indirect (DI) luminaire is available with Standard 0-10V (DD) Controls option only. Reference Emergency Options product specification notes and Battery Location tables for additional details.	**Notes** 347V (3) available with Standard 0-10V (DD) Controls option only	**Notes** Use standard 0-10V (DD) for Static BioUp (B). 2-Channel 0-10V (W2A) available with VividTune (V) and Dynamic BioUp (B2750) only. 2-Channel DALI (W2D) available with Dynamic BioUp (B2750) only. Fifth Light DALI (5L) available with 1% dimming upon request.*

*Note: Options listed as "available by request" require review and may impact pricing and leadtime.

Order Information

Icon Key: Grey bar denotes available with 10-Day Quick Spec

SAMPLE ORDER NUMBER: **S122DIP-C500D300U935-C4T1B-24F0-1-UDD-F4-BM-P**

Optics: Direct Optics	Optics: Indirect Optics	Options: Body Finish	Wireless Controls
[Blank] = N/A **F** = Frosted Lens (Diffuse) **D** = Frosted 1in Drop Lens (Diffuse) **A** = Asymmetric **WVL** = White Louver w/ Frosted Lens **SVL** = Silver Louver w/ Frosted Lens **BVL** = Black Louver w/ Frosted Lens	**[Blank]** = Open No Lens (or N/A) **1** = Frosted Lens (Diffuse) **4** = Batwing (Optic) **HOB** = Half Batwing	**W** = White **S** = Silver **B** = Black (Semi-Gloss) **BM** = Black (Matte) **RR** = Real Red **OO** = Oasis Orange **YY** = Yippee Yellow **GG** = Gracious Green **CC** = Cyprus Cyan **TT** = Totally Turquoise **BB** = Biosphere Blue **PP** = Perfect Purple **VV** = Vacation Violet **MM** = Magic Magenta **C** = Custom Color (RAL) **CM** = Custom Color (Match)	**[Blank]** = None **Wavelinx Wireless** **WPS** = WaveLinx PRO Integrated Sensor **WLS** = WaveLinx LITE Integrated Sensor
Notes Use [Blank] with Indirect Only luminaire Louvers (VL) available with 1in Regress (R) compatible housing in 1ft increments only. Louvers (VL) available in <1ft increments and custom Pattern (P) by request.* Asymmetric (A) available with VividTune upon request.* Performance is based on 3500K 80CRI with Flush Frosted Lens and White housing. Reference Lumen Adjustment Factors table for more detail.	**Notes** Use [Blank] with Direct Only (D) luminaire. Use [Blank] for No Lens (open top) with Direct + Indirect (DI) or Indirect Only (I) luminaire. Performance is based on 3500K 80CRI with No Lens and White housing. Reference Lumen Adjustment Factors table for more detail.	**Notes** Custom Colors (C and CM) are available by request.* Performance is based off White (W) and may vary with selected finish.	**Notes** WaveLinx is available with (DD) and Single Circuit (1) only. Integrated Sensors with Louvers, Regressed, or Drop lenses available by request.* Integrated Sensors combined with Emergency Circuit (E) require one UL924 Bypass Relay (T) per emergency fixture. Integrated Sensors combined with a Battery (B) in Direct + Indirect (DI) are available in luminaire lengths >4ft only.

Pattern Type	Special Options*
[Blank] = Individual or Straight Run **P** = Pattern **H** = Define Pivot Hub Pattern	**[Blank]** = None
Notes Please include the angle for each illuminated corner and intersection when providing sketch/ drawing (ex. A045 = 45°) for a custom Pattern (P). Reference the Define Pivot Hub accessory spec sheet for Define Pivot Hub Pattern (H) compatibility.	**Notes** *All special options available by request.* Multiple Special Option Codes may be specified with a "-" to separate. (ex. XX-YY-ZZ)

*Note: Options listed as "available by request" require review and may impact pricing and leadtime.

Product Specifications

Domestic Preference‡

- ‡Only product configurations with these prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or the Build America Buy America Act (BABA). BABA is the minimum Government compliance requirement for the Build America Buy America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. Please refer to the DOMESTIC PREFERENCES website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.

Serviceability

- Snap-in lens allows easy access to optical cavity and light engine.
- Removable modular light engine tray with quick disconnect wire-harness for ease of installation and maintenance over the life of the luminaire

Construction

- Precision cut housing extruded from 6063 aluminum
- Welded end-caps ensure a robust and clean construction
- Flush and 1in Regress Housing options available

Individuals, Runs, Patterns

- Fully luminous individual luminaires, straight runs, or custom patterns
- Patterns constructed using precision mitered housing and lens components
- Extrusions are welded to ensure a precise and robust housing
- Specify individual luminaire, linear run, or total custom pattern lengths in xft/xin increments
- Minimum fixture length is 2ft; minimum fixture length is 3ft for Direct + Indirect luminaire
- All lengths are nominal lengths and do not include end caps; reference drawings for total lengths.
- 8ft Max Section Length used on straight runs and patterns; use 8ft Max Section Length to limit max individual, run, and pattern section lengths to 8ft

Output

- Specify Custom Lumen Output to the nearest 10Lm/ft
- Available in Static 2700K, 3000K, 3500K, 4000K, 5000K
- CRI ≥80CRI or ≥90CRI
- Nominal performance is based on 3500K 80CRI with Flush Frosted Lens and White Housing; reference Lumen Adjustment Factors table for more detail.
- Extrapolated LED lifetime per TM-21:
  - Greater than L90 at 61,000 hrs
  - L70 exceeding 100,000 hrs
- Available in 120-277V, 347V
- VividTune Tunable White available in Dynamic 2600K-6500K or 3000K-5000K; reference VividTune section for additional details
- BioUp Melanopic Lighting available in Static 3500K, 4000K, 5000K or Dynamic 2700K-5000K
- BioUp CRI ranges from >80CRI to 96CRI
- Reference BioUp section for additional details including Melanopic Daylight Efficacy Ratio (MDER)

Optics

- Patented solution provides consistent illumination with no pixelation at the ends of individual luminaires, straight runs, and patterns.
- Direct Optics
  - F (or FLL): Frosted lens (Diffuse) with Lambertian distribution
  - D: Frosted 1in Drop Lens with Wide Lambertian distribution
  - A: Frosted lens with Asymmetric distribution
  - VL: Premium straight blade Louver with metal construction and Frosted lens. 1in regress with 1in spacing provides superior low glare 45° cutoff
- Indirect Optics
  - Open No Lens: Open top with Lambertian distribution provides lowest cost and highest efficacy option
  - 1: Frosted lens (Diffuse) with Lambertian distribution provides dust cover option when top of the luminaire is viewable during normal use
  - 4: Batwing optic with ultra wide 110° distribution for maximizing ceiling uniformity and on-center spacing
  - HOB: Shielded batwing optic with ultra wide half batwing distribution

Emergency Options

- Battery operates entire downlight portion of individual luminaires < 7ft
- Battery operates 4ft sections of longer luminaires, runs, and patterns
- Reference Battery Location section for additional details
- UL924 Bypass Relay Device available as emergency generator transfer option
- Emergency Circuit combined with Integrated Sensors require one UL924 Bypass Relay per emergency fixture

Integrated Controls

- 0-10V dimming to 1% standard
- Fifth Light DALI dimming to 5% standard; Fifth Light DALI dimming to 1% available by request*
- Lutron EcoSystem DALI dimming to 1% standard
- Additional control types may be available by request*
- Reference Sensor Placement section for default integrated sensor locations of individual luminaires and straight runs
- Please include preferred integrated sensor locations when providing sketch/drawing for a custom Pattern(P)

Mounting

- Adjustable aircraft cables for balancing
- 0.5in Rigid Stem Pendant options available
- Reference Mounting section and installation instructions for additional details

Finish

- Electrostatically applied polyester powder coat paint
- See Finish Options section for additional details
- RAL Colors and Custom Match Colors available by request*

Special Options*

- *All special options available by request*
- *Any options listed as 'available by request' require review and may impact pricing and leadtime
- Consult factory to request any options not listed
- Reference the Mods Collection for common special option requests

Compliance

- UL listed for damp locations
- IC Rated for insulation contact (except where noted)
- RoHS
- Tested to IESNA LM-79 and LM-80
- Can be used for State of California Title 24 high efficacy luminaire
- DLC qualified options available

Warranty

- Five year limited warranty www.cooperlighting.com/legal

Finish Options

W - White	**S** - Silver	**B** - Black Semi-Gloss	**BM** - Black Matte	
RR - Real Red RAL 3020 Gloss	**OO** - Oasis Orange RAL 2004 Gloss	**YY** - Yippee Yellow RAL 1018 Gloss	**GG** - Gracious Green RAL 6018 Gloss	**CC** - Cyprus Cyan RAL 6027 Gloss
TT - Totally Turquoise RAL 5018 Gloss	**BB** - Bioshere Blue RAL 5017 Gloss	**PP** - Perfect Purple RAL 4005 Gloss	**VV** - Vacation Violet RAL 4008 Gloss	**MM** - Magic Magenta RAL 4010 Gloss

*RAL Colors & Custom Match Colors available by request**

Photometric Data - Static White LED Technology



FILE NAME:
S125DIP-S850D810U835-4F0-1E-UDD-F
LUMENS: 6326.5 Lms
LPW: 137.8 LPW
CCT: 3500K
WATTS: 45.9 W
TEST NUMBER: P333231

Batwing (4)
Flush Frosted Lens (F)



FILE NAME:
S125DIP-S850D850U835-4F0-1E-UDD-F
LUMENS: 6657.9 Lms
LPW: 145.1 LPW
CCT: 3500K
WATTS: 45.9 W
TEST NUMBER: P333229

Open No Lens (Blank)
1in Regress Frosted Lens (RD+ F)





FILE NAME:
S125DIP-S850D850U835-4F0-1E-UDD-D
LUMENS: 6523.0 Lms
LPW: 142.1 LPW
CCT: 3500K
WATTS: 45.9 W
TEST NUMBER: P333226

Frosted 1in Drop Lens (D)

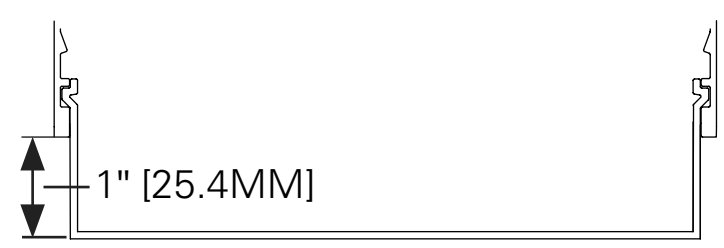



FILE NAME:
S125DIP-S850D850U835-4F0-1E-UDD-A
LUMENS: 6694.0 Lms
LPW: 145.8 LPW
CCT: 3500K
WATTS: 45.9 W
TEST NUMBER: P333223

Open No Lens (Blank)
Flush Asymmetric (A)



FILE NAME:
S125DIP-S850D810U835-4F0-1E-UDD-F
LUMENS: 6326.5 Lms
LPW: 137.8 LPW
CCT: 3500K
WATTS: 45.9 W
TEST NUMBER: P333231

Half Batwing (HOB)
Flush Frosted Lens (F)

Photometric Overview and Performance Data

Direct Performance Per Linear Foot at 3500K/80CRI

Nominal Output	Standard		High Performance		VividTune	
lms/ft	W/ft	lm/W	W/ft	lm/W	W/ft	lm/W
375	2.9	133	2.9	136	3.0	130
610	4.8	134	4.4	140	4.9	130
850	6.7	131	6.1	141	6.7	129
1090	8.8	129	8.1	138	8.9	125
1270	10.6	124	9.7	132	10.7	121

Indirect Performance Per Linear Foot at 3500K/80CRI

Nominal Output	Standard		High Performance		VividTune	
lms/ft	W/ft	lm/W	W/ft	lm/W	W/ft	lm/W
365	2.2	168	2.5	171	2.6	164
590	3.6	169	3.9	176	4.3	158
810	5.0	165	5.3	177	5.9	158
1035	6.6	161	7.1	168	7.8	154
1205	7.9	158	8.5	164	9.4	153

Lumen Adjustment Factors

Body Finish	Direct Optics		Indirect Optics	
White (W)	Flush Frosted Lens (F)	1.000	Open No Lens (Blank)	1.000
	Asymmetric (A)	1.010	Flush Frosted Lens (1)	0.865
	Drop (D)	0.960	Batwing (4)	0.899
	1in Regress Frosted (RD + F)	0.951	Half Batwing (HOB)	0.544
	White Louver w/ Frosted Lens (WVL)	0.650		
	Silver Louver w/ Frosted Lens (SVL)	0.399		
	Black Louver w/ Frosted Lens (BVL)	0.341		
Silver (S)	White Louver w/ Frosted Lens (WVL)	0.549		
	Silver Louver w/ Frosted Lens (SVL)	0.357		
	Black Louver w/ Frosted Lens (BVL)	0.306		
Black (B)	White Louver w/ Frosted Lens (WVL)	0.511		
	Silver Louver w/ Frosted Lens (SVL)	0.333		
	Black Louver w/ Frosted Lens (BVL)	0.287		

CCT	80CRI	90CRI
2700K	N/A	0.792
3000K	0.943	0.815
3500K	1.000	0.861
4000K	1.010	0.892
5000K	1.010	0.892

Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance (60,000 hours) (1)	Theoretical L70 (Hours) (2)
25°C	>90%	>100,000

Notes: (1) Supported by IES TM-21 standards. (2) Theoretical values represent estimations commonly used; however, refer to the IES position on LED Product Lifetime Prediction, IES PS-10-18, that explains proper use of IES TM-21 and LM-80.

Color Data (3500K)

		80CRI	90CRI
TM-30-15	R_f	85.3	90.8
	R_g	97.3	99.7
CRI/CIE	R_a	85.2	94.8
	R_9	17.2	70.7

80CRI

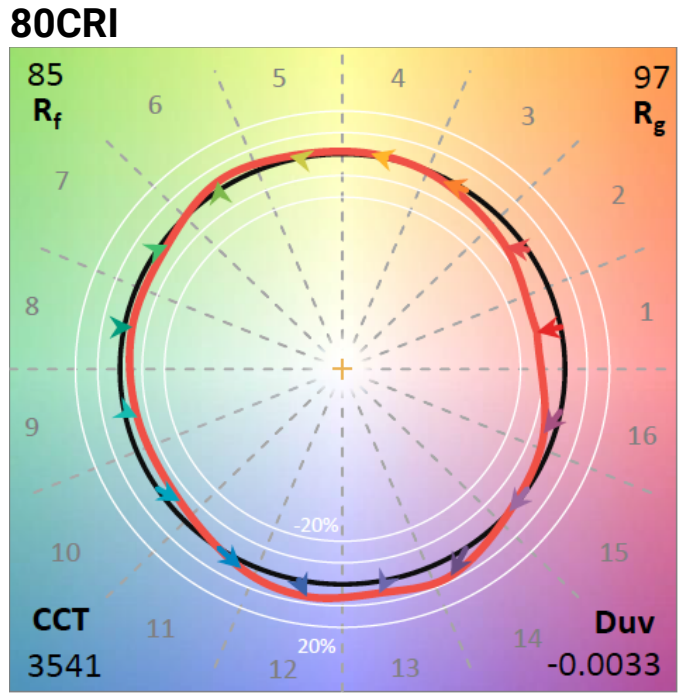

90CRI

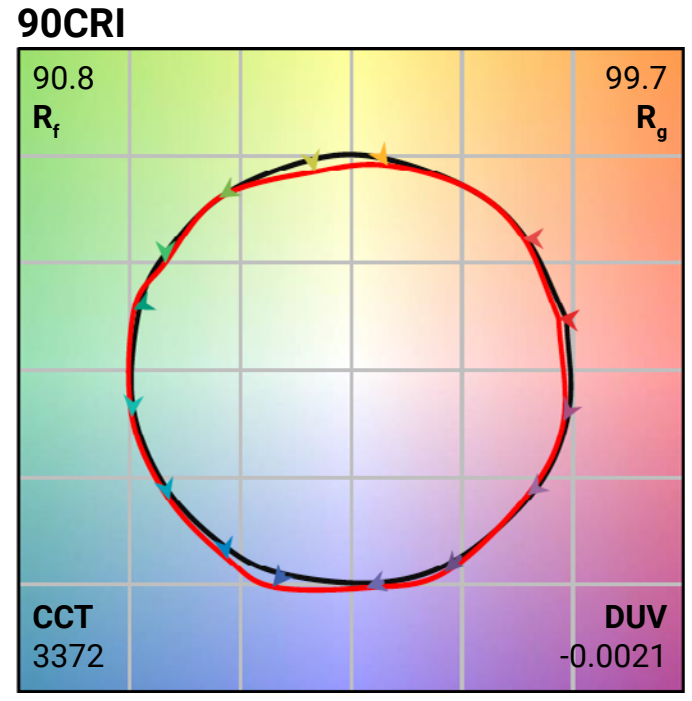

Proven Research. Industry Recognized.

BioUp
Melanopic Lighting

See better · Feel better · Function better



See BioUp brochure for more details

ANSI/IES RP-46-23
Illuminating Engineering Society
RECOMMENDED PRACTICE: SUPPORTING THE PHYSIOLOGICAL AND BEHAVIORAL EFFECTS OF LIGHTING IN INTERIOR DAYTIME ENVIRONMENTS
AN AMERICAN NATIONAL STANDARD

ANSI/IES RP-46-23 / TM18 published March 2024 based on over 40 years of research.

"...circadian clock synchronization is paramount to the body's efficient and appropriate functioning." – TM18

INTERNATIONAL WELL BUILDING INSTITUTE™

BioUp solutions maximize WELL points for Circadian Lighting Design (L03):

275 EML
250 Lux M-EDI

180 EML
163 M-EDI

Use BioUp to achieve Equivalent Melanopic Lux (EML) thresholds for circadian design and earn nearly 20% of WELL building lighting points.



MDER, M-EDI and **EML** are key metrics used to quantify non-visual performance of indoor lighting systems.



See BioUp white paper for more details

MDER - Melanopic Daylight Efficacy Ratio (MDER) measures the amount of light stimulating to the melanopsin receptors.

Standard 4000K LED
MDER = .62

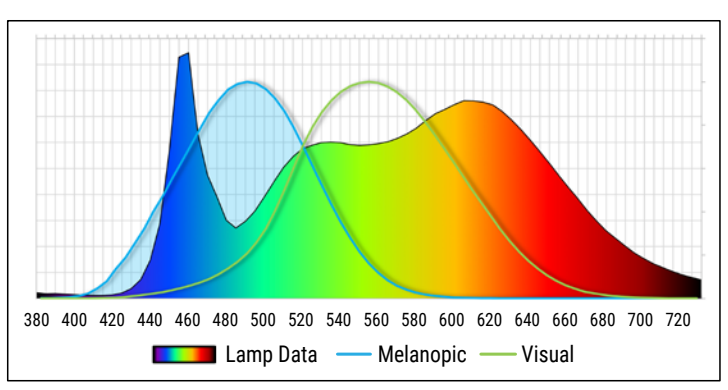

BioUp 4000K LED
MDER = .82

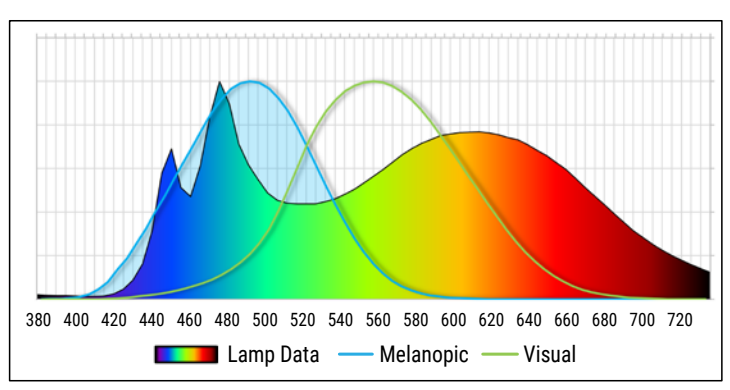

30% boost Biological impact
compared to traditional LED sources

CCT	LED MDER ~83 CRI	BioUp Static		BioUp Dynamic	
		MDER	CRI	MDER	CRI
2700K	0.44	–	–	0.43	95
3000K	0.49	–	–	0.54	94
3500K	0.56	0.71	90	0.71	90
4000K	0.64	0.84	87	0.82	87
5000K	0.77	0.98	84	0.98	84

BioUp enhances the LED spectrum with cyan light at 475nm increasing the biological impact of the light to enhance our circadian rhythm which regulates our sleep/wake cycle, daytime engagement, and mood –
all without distorting visual color impression.

Static (non-tunable)
Static BioUp is used when simple Melanopic Lighting is desired at all times.

Arrow in graph shows BioUp spectrum boost is at 475nm where non-visual biological response is enhanced.







3500K or **4000K** or **5000K**

Cyan light component always present

Dimming Control — 0% Intensity 100%

› no CCT control needed

Dynamic - (Tunable)
Dynamic BioUp is used when Melanopic Lighting is desired to adjust during the day.

Evening



Daytime



Warmer CCT **Without** Cyan content — Cooler Light **With** Cyan content

2700K – 5000K

CCT Control — warm 2700K CCT cool 5000K

Dimming Control — 0% Intensity 100%

› Control with Wavelinx, 2ch 0-10V, or DALI

4in	DIRECT	
Nominal Output	BioUp Light Engine	B35 efficacy
lm/ft	W/ft	lm/W
375	-	-
610	5.9	103.4
850	8.6	98.8
1090	11.1	98.2
1270	15.0	84.7

0-10V						
Availability						
Lumens/ft		375	610	850	1090	1270
Fixture Length	2	-	-	-	-	-
	3	-	-	-	-	-
	4	-	•	•	•	•
	5	-	•	•	•	•
	6	-	•	•	•	•
	7	-	•	•	•	•
	8	-	•	•	•	•
	9	-	•	•	•	•
	10	-	•	•	•	•
	11	-	•	•	•	•
	12	-	•	•	•	•

DALI						
Availability						
Lumens/ft		375	610	850	1090	1270
Fixture Length	2	-	-	-	-	-
	3	-	-	-	-	-
	4	-	•	•	•	-
	5	-	•	•	•	-
	6	-	•	•	•	-
	7	-	•	•	•	-
	8	-	•	•	•	-
	9	-	•	•	•	-
	10	-	•	•	•	-
	11	-	•	•	•	-
	12	-	•	•	•	-

4in	INDIRECT SUSPENDED	
Nominal Output	BioUp Light Engine	B35 efficacy
lm/ft	W/ft	lm/W
365	-	-
590	4.5	131.1
810	6.1	132.8
1035	8.3	124.7
1205	9.8	123.0

0-10V						
Availability						
Lumens/ft		365	590	810	1035	1205
Fixture Length	2	-	-	-	-	-
	3	-	-	-	-	-
	4	-	•	•	•	•
	5	-	•	•	•	•
	6	-	•	•	•	•
	7	-	•	•	•	•
	8	-	•	•	•	•
	9	-	•	•	•	•
	10	-	•	•	•	•
	11	-	•	•	•	•
	12	-	•	•	•	•

DALI						
Availability						
Lumens/ft		365	590	810	1035	1205
Fixture Length	2	-	-	-	-	-
	3	-	-	-	-	-
	4	-	•	•	•	-
	5	-	•	•	•	-
	6	-	•	•	•	-
	7	-	•	•	•	-
	8	-	•	•	•	-
	9	-	•	•	•	-
	10	-	•	•	•	-
	11	-	•	•	•	-
	12	-	•	•	•	-

VividTune™
color tuning solutions

Define with VividTune Tunable White

VividTune tunable white luminaires deliver high-quality light in a broad range of continuously variable color temperatures and intensities. Create a dynamic environment by adjusting the ambient light warmer or cooler to influence mood, support the task at hand, or create a dramatic ambience. The ability to control correlated color temperature and intensity separately using simple controls is the next evolution of LED lighting for the commercial, educational, healthcare and hospitality space. The unparalleled flexibility and number of available lighting environments enable users to find the right light with tunable white.

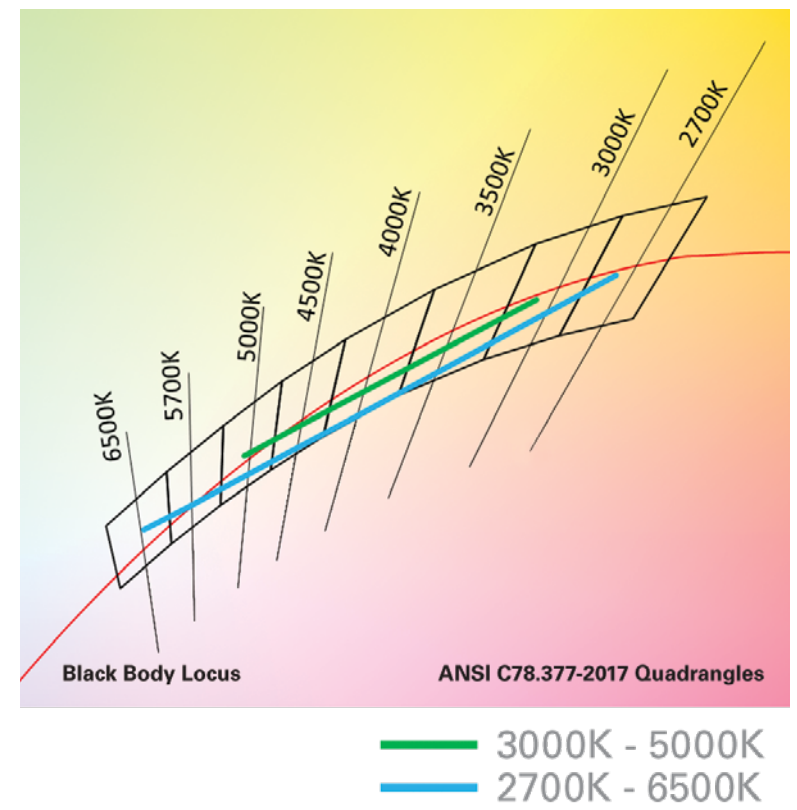

Performance Data

Tunable White - Lumen Adjustment Factors				
CCT	3000K-5000K		2700K-6500K	
	80 CRI	90 CRI	80 CRI	90 CRI
2700K	-	-	0.868	0.741
3000K	0.894	0.736	0.893	0.771
3500K	0.946	0.804	0.924	0.809
4000K	0.993	0.868	0.944	0.835
4500K	1.002	0.883	0.961	0.857
5000K	1.002	0.883	0.974	0.874
6500K	-	-	0.988	0.897

Controlling VividTune Tunable White

VividTune luminaires make tunable white more accessible by using simple and familiar controls. From wall dimmers to wireless controls, VividTune tunable white luminaires are compatible with industry standard 0-10V dimming controls. A single 0-10V dimming input is used to control intensity (brightness) while a second 0-10V dimming input is used to adjust CCT. For suggested control configurations, go to www.cooperlightingsolutions.com for tunable white application guides.

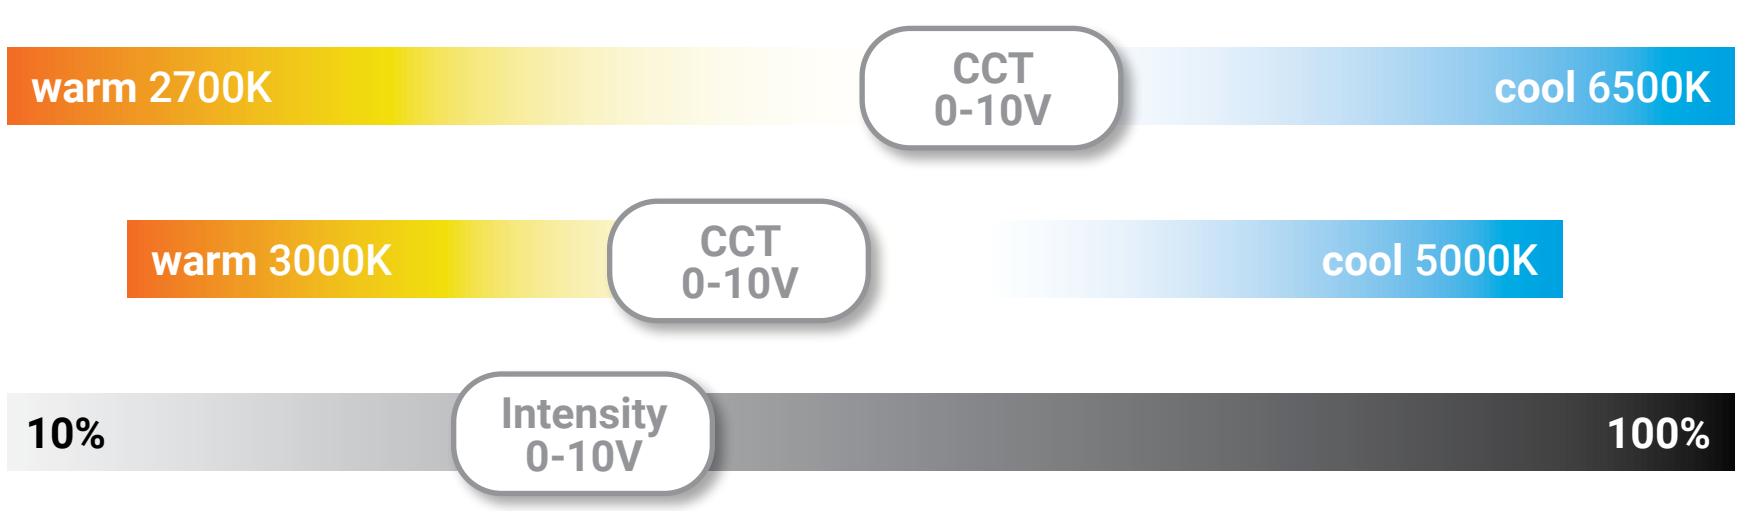

Control Solutions

- WaveLinx LITE wireless
- WaveLinx PRO wireless
- WaveLinx CAT wired
- WaveLinx Wired

WaveLinx Digital Lighting Control Solutions

Define with WaveLinx offers no-hassle lighting control with multiple luminaire level control solutions.

WaveLinx PRO is a wireless lighting control solution, for connected spaces, that significantly reduces a building's energy consumption. From a single floor to an entire campus, WaveLinx PRO connects more than lighting assets; it shares aggregated sensor data with the WaveLinx CORE platform and other building systems, so building owners can improve operations, spaces environment, and tenants' experience. WaveLinx PRO offers a rich portfolio of wireless devices, WaveLinx PRO-enabled luminaires, and an intuitive WaveLinx mobile app for office, education, warehouse, and parking garage applications.

WaveLinx LITE is a cost effective, wireless digital lighting control solution, with out-of-the-box functionality, that saves energy and meets code. It's designed for applications that require occupancy-based, daylighting, or manual light control. Customize installations for office, education, warehouse and parking garages using the secure, simple mobile app.

Integrated Sensor Coverage Pattern

TOP VIEW:



SIDE VIEW:



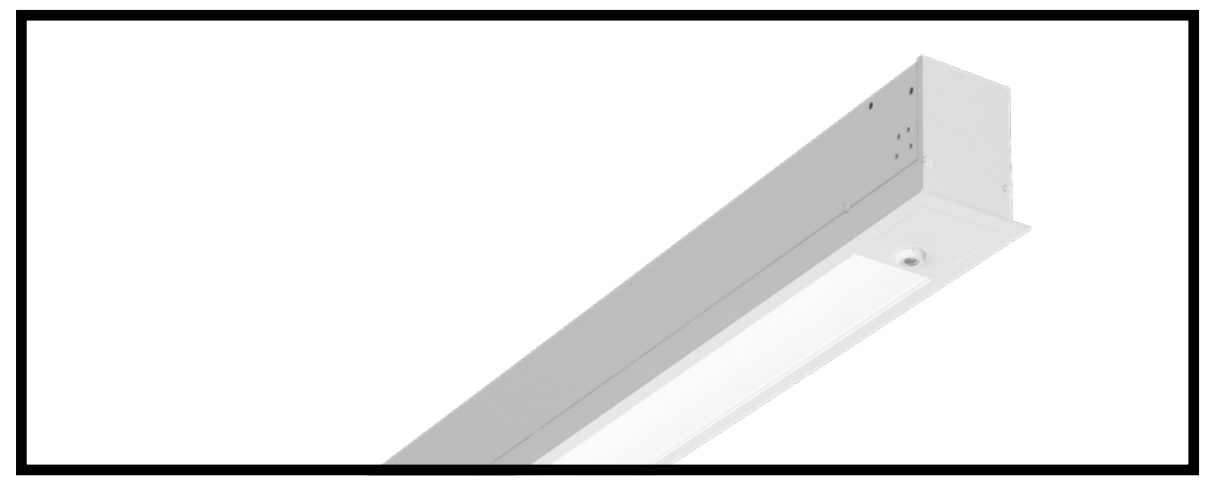

***Note**: Installation of integrated sensors within 3-ft (1m) of HVAC air vents is not recommended. The pattern shown is intended solely as a general guide and is not to scale.*





	Luminaire with standalone sensor	Standalone Spaces WaveLinx LITE	Standalone Spaces WaveLinx CAT	Networked Spaces WaveLinx PRO	Enterprise WaveLinx CORE
Occupancy	Yes	Yes	Yes	Yes	Yes
Daylighting	Yes	Yes	Yes	Yes	Yes
Wallstations	–	Yes	Yes	Yes	Yes
Gateways	–	–	–	1 WAC	300 WACs
Devices (MAX)	–	40 per Area (1120 per space)	40 per Area	200 per WAC2	32,500 per CORE Enterprise
Software	–	WaveLinx LITE Mobile App	WaveLinx CAT Mobile App	WaveLinx Mobile App	CORE
Areas	–	28 per Space	Unlimited	50 per WAC2	up to 3,000
Zones	–	16 per Area	16 per Area	16 per Area	up to 9,000
Scheduling	–	–	–	Local	Global
VividTune™	–	–	–	Yes	Yes
Plug-Load Control	–	Yes	Yes	Yes	Yes
Low-Voltage Power	–	–	Yes	Yes	Yes
Integration	–	–	–	–	BACnet, API
Dashboards	–	–	–	–	Energy, Occupancy
Configuration	–	Installer	Installer	Technician	Technician / IT

SCALABILITY

WaveLinx expands from a single standalone device up to Enterprise with 32,500 devices

**Note: WaveLinx LITE devices can be upgraded to WaveLinx PRO via an OTA firmware update. The OTA and system configuration can only be performed by Cooper Lighting Solutions specialists. WaveLinx Area Controller(s) would also need to be added to complete the solution.*

Integrated Sensors

Refer to default sensor details below for integrated sensor locations of individual and straight runs. Please include preferred integrated sensor locations when providing sketch/drawing for a custom pattern.

○ Standard Sensor with Luminaire Control
⊗ Auxiliary Sensor used for Sensor Coverage

Individual Luminaire Default Sensor Placement

≤8ft Individual

>8ft Individual

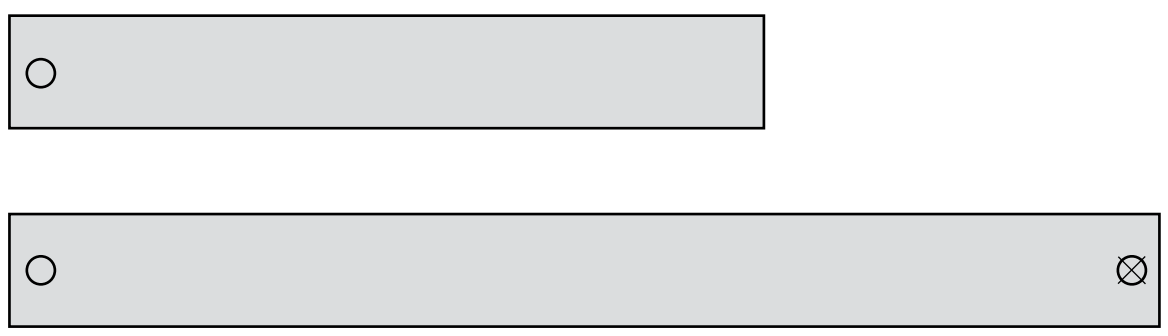

Straight Run Default Sensor Placement

Beginning of Run (BOR)

Intermediate Section (INT)

End of Run (EOR) > 4ft

End of Run (EOR) ≤ 4ft

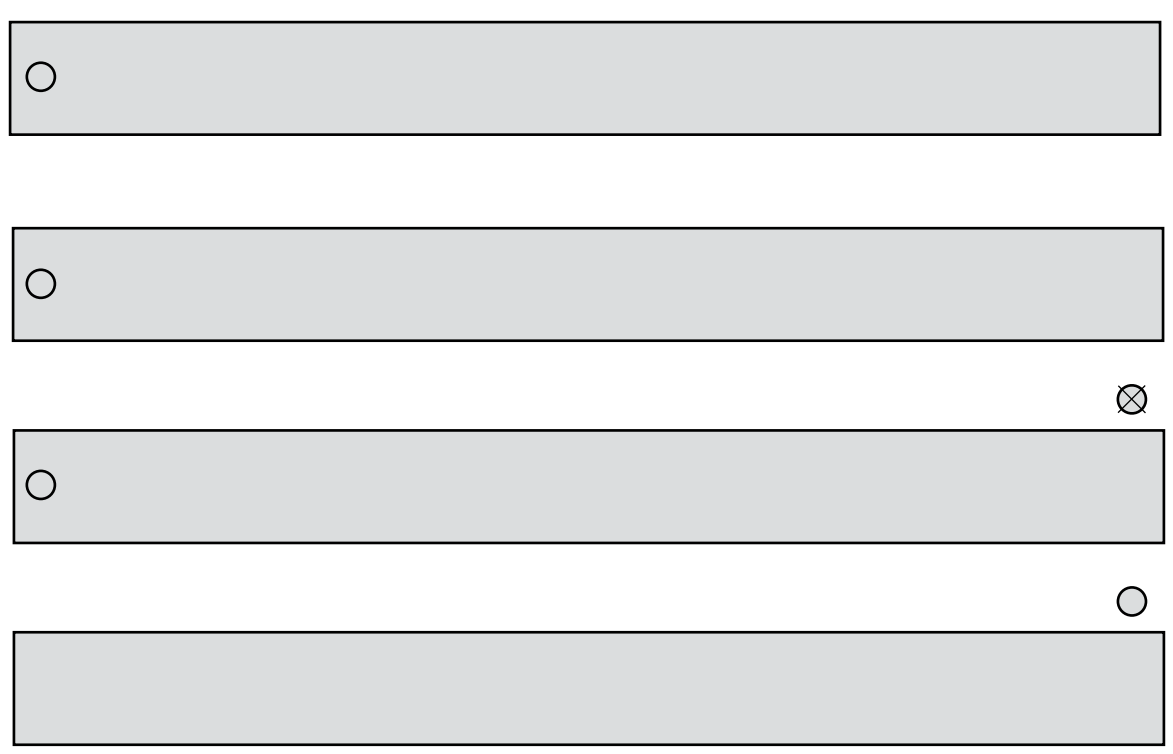

Battery Location Details

	< 4ft	≥ 4ft
Define 2	Consult Factory	Internal (B3)
Define 3	Consult Factory	Internal (B1, B2, B3)
Define 4	Consult Factory	Internal (B1, B2, B3)
Define 5	Consult Factory	Internal (B1, B2, B3)

Luminaire Weight (lbs/ft)

	Indirect Only	Direct Only	Direct + Indirect
Define 2	2.3	3.0	3.1
Define 3	3.1	3.6	3.7
Define 4	3.7	4.0	4.2
Define 5	4.3	5.2	5.4

© 2026 Cooper Lighting Solutions
All Rights Reserved.

Specifications and dimensions subject to change without notice.