

Project		Catalog #		Type	
Prepared by		Notes		Date	



Interactive Menu

- Order Information [page 2](#)
- Product Specifications & Standard Colors [page 3](#)
- Textures & On-Demand Colors [page 4](#)
- Mounting [page 5](#)
- Lumen Maintenance & Photometric Data [page 6](#)
- Lumen/Wattage/LPW & UGR Data [page 6](#)

PrentaLux

CYL6 - 6" Sustainable LED Cylinder

6" Cylinder
Integral LED Light Engine
Functional Performance Decorative

Typical Applications

• Office • Education • Healthcare • Hospitality • Retail • National Accounts



Filament only




LIVING BUILDING CHALLENGE


Top Product Features

- PrentaLux CYL6 is a series of performance and decorative cylinder pendants using Cooper Lighting Solutions additive manufacturing technology with an integral LED light engine.
- 8 housing texture options available.
- 9 standard opaque housing color options and 5 opaque color inner trim options with additional on-demand colors available.
- 90+ CRI standard with 4 CCT options (2700K, 3000K, 3500K, 4000K).
- 8 Light Levels ranging from nominal 1000 to 7000+ lumens.
- Universal Voltage (120-277V) & 347V.
- 0-10V integral driver with dimming from 100% to 1%.
- [Declare compliant](#)
- BAA compliant & BABA compliant.
- LBC Red List approved.
- 5-Year Limited Warranty.

Dimensions

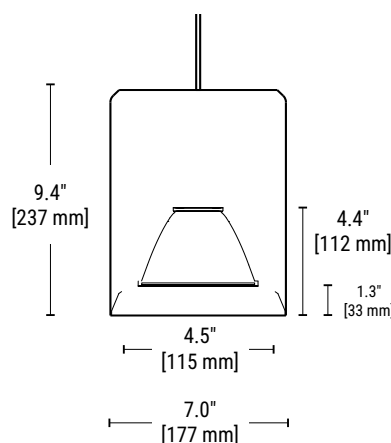

Scale

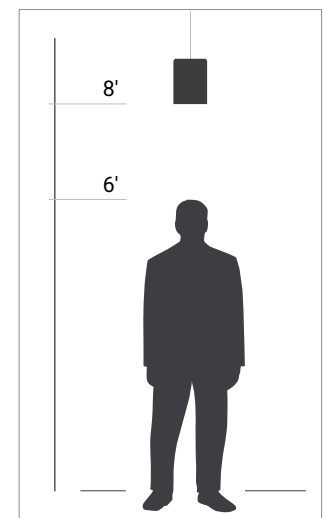

Order Information

SAMPLE CATALOG NUMBER: PRLX-CYL6-9-935-31L-FL-U-S-BLAK-MW-BRSS-CCL-DB

Domestic Preferences	Brand	Series	Height	CRI/CCT	Light Level	Optics	Voltage	Dimming
[Blank] = Standard BAA = Buy America Act BABA = Build America Buy America Act	PRLX	CYL6	9 = 9"	927 = 90 CRI, 2700K 930 = 90 CRI, 3000K 935 = 90 CRI, 3500K 940 = 90 CRI, 4000K	12L = 1200 lms (at 3500K, 90CRI), 7.5W 18L = 1800 lms (at 3500K, 90CRI), 11W 23L = 2300 lms (at 3500K, 90CRI), 15W 31L = 3100 lms (at 3500K, 90CRI), 20.5W 43L = 4300 lms (at 3500K, 90CRI), 29.5W 48L = 4800 lms (at 3500K, 90CRI), 33.5W 62L = 6200 lms (at 3500K, 90CRI), 48W 74L = 7400 lms (at 3500K, 90CRI), 61.5W	MD = Medium (25°) FL = Flood (36°) WD = Wide Flood (60°)	U = Universal Voltage (120-277V) 3 = 347V	S = 0-10V, 100-1% Dimming WLN = WaveLinX LITE Wireless Node without sensor WPN = WaveLinX PRO Wireless Node without sensor
1. Only product configurations with these prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or the Build America Buy America Act (BABA). BABA is the minimum Government compliance requirement for the Build America Buy America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. Please refer to DOMESTIC.PREFERENCES website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.	Notes	Notes		Notes	Notes	Notes	Notes	Notes
					1. Lumen targets above are based on 90 CRI and 3500K values. Use IES files for accurate calculations. 2. See Lumen Table on Page 6 for exact CCT to Lumen table values. 3. 62L and 74L not available with 347V input voltage.		1. 347V not BABA compliant. 2. 347V not available with 62L and 74L light levels.	

--	--	--	--	--	--	--	--	--

Housing Color ¹	Housing Texture	Trim Color ¹	Mounting Type	Canopy Shape and Color
Standard Housing Colors WHITE = White BLAK = Black GRAY = Gray ROSE = Rose CAPP = Cappuccino SAGE = Sage BRNZ = Bronze BRSS = Brass SLVR = Silver XXXX² = On-Demand Color	Outer Shade Textures MW = Micro Woven (Standard) NL = Natural Lines VF = Vertical Fluted CH = Checkered QS = Quilted Square HC = Honeycomb TP = Triangular Pyramids IC = Iced Out XX² = Other Shade Texture	Standard Trim Colors WHITE = White BLAK = Black SLVR = Silver BRNZ = Bronze BRSS = Brass HTCM = Housing Trim Color Match XXXX² = On-Demand Color	Cord Mounting¹ CCL = Cord, Clear Jacket CWH = Cord, White CBK = Cord, Black Rigid Stem Mounting² STM = Rigid Stem Mount	DW = Disk - White DB = Disk - Black DC = Disk canopy matches outer shade color (opaque color only) CW = Conical - White CB = Conical - Black CC = Conical canopy matches outer shade color (opaque color only) [BLANK] = Canopy included with Stem Mount Kit
Notes	Notes	Notes	Notes	Notes
1. See page 3 for images of color options. 2. On-Demand colors available with possible extended lead times and additional costs. Consult factory. See page 4 for images of On-Demand color options.	1. See page 4 for texture details and options. 2. Consult factory to request other textures. Extended lead times, additional costs, and minimum order quantity may apply.	1. See page 3 for images of color options. 2. On-Demand colors available with possible extended lead times and additional costs. Consult factory. See page 4 for images of On-Demand color options.	1. Standard length of cord - 10ft [3050 mm]. Max available length is 25ft [7.62 m]. Consult factory for lengths longer than 10ft. 2. Rigid stem must be ordered separately as an accessory. See Accessories section below for Stem Accessory Kit Ordering Codes. 3. Rigid stem mount fixture comes with 7ft of wire connected to the fixture to work with all standard stem kit lengths and can be cut to length during installation. Consult factory for longer lengths.	1. Standard length of cord - 10ft [3050 mm]. Max available length is 25ft [7.62 m]. Consult factory for lengths longer than 10ft.

Accessories

--	--

Stem Kits CASK36BK14NW = 36" Black Stem Kit CASK48BK14NW = 48" Black Stem Kit CASK60BK14NW = 60" Black Stem Kit CASK72BK14NW = 72" Black Stem Kit CASK36WT14NW = 36" White Stem Kit CASK48WT14NW = 48" White Stem Kit CASK60WT14NW = 60" White Stem Kit CASK72WT14NW = 72" White Stem Kit Connected Lighting Systems WPST = Field installed WaveLinX Sensor Kit WLST = Field installed WaveLinX Lite Sensor
Notes
1. Accessories must be ordered separately.

Product Specifications

Construction

- PrentaLux CYL6 consists of an integral LED light engine and driver.
- CYL6 series housing components utilize a proprietary, impact resistant polycarbonate for maximum durability
- The polycarbonate used for PrentaLux fixtures is bio-circular and thermally, mechanically and optically optimized for professional/commercial installations. Designed, engineered, and printed in the United States.

Electrical

- Standard 0-10V driver (with dimming from 100% to 1%) integrated into the pendant head (120/277V/50-60Hz).

LED & Light Engine

- Available in 2700K, 3000K, 3500K, and 4000K CCT
- 90 CRI standard
- 8 Lumen packages ranging from nominal 1000, 1500, 2000, 3000, 4500, 6000, 7000+ lumens. (subject to specific CCT and Light Level).

Driver

- Standard offering is 0-10V with 1% dimming.

Optics

- Medium, Flood and Wide Flood optics available.
- Polar plot and UGR data on page 6.

Environment

- Suited for 25° ambient. Suitable for damp locations.

Shielding

- Optic depth and design provides excellent physical cut off.
- 3D printing enabled personalization allows for easy adjustment of cut off angle (MOQ may apply)

Colors & Textures

- 9 standard housing colors available. 5 standard inner trim colors available.
- On-Demand colors and textures available with possible extended lead times and additional costs. Please consult factory.

Mounting

- Mounting options include UL certified cord and option of 3D printed disk shape or conical shape, mounting hardware.
- Rigid stem kits available in four standard lengths, black or white, and ceiling pivot.
- Rigid stem provided in 3' maximum segments.

Lengths

- Cord supplied is standard 10ft long. Lengths up to 25 ft possible. (Consult factory as longer lead times apply).
- Multiple length rigid stems are available as an accessory (ordered separately).

Weight

- All products are light weight and much easier to install than traditional pendants.
- CYL6 fixture weighs approximately 6 lbs.

Warranty

- Standard five-year limited warranty on all parts.

Connected Lighting System

Two WaveLinx connected solutions to choose from. Refer to WaveLinx system specifications and application guides for details.

[WaveLinx PRO Tilemount Sensor Kit](#)

- WaveLinx PRO WPST tilemount sensor kit offers daylight dimming, PIR motion sensing, scene and zone configuration, automatic commissioning; and optional RLTS - Real Time Location Services available.

[WaveLinx PRO Wireless Node](#)

- WaveLinx PRO WPN wireless node provides luminaire-level control with scene and zone configuration without an integrated sensor; Connects wirelessly with daylight dimming sensor and PIR motion sensor if desired. Use with 0-10V driver only. **Note:** Not compatible with 347V or Chicago plenum.

[WaveLinx LITE Tilemount Sensor Kit](#)

- WaveLinx LITE WLST tilemount sensor kit offers daylight dimming and PIR motion sensing, scene and grouping configuration.

[WaveLinx LITE Wireless Node](#)

- WaveLinx LITE WLN wireless node provides luminaire level control with scene and zone configuration without an integrated sensor; Connects wirelessly with daylight dimming sensor and PIR motion sensor if desired. Use with 0-10V driver only. **Note:** Not compatible with 347V or Chicago plenum.

WaveLinx Tilemount Sensor Kits Application

- The WPST and WLST tilemount sensor kits include a control module mounted on the luminaire junction box via 1/2" knock-out, and a tilemount sensor on 54-inch whip; for ceiling installation by direct-mount spring clips or via mounting bracket in octagon ceiling boxes.
- The WPST and WLST tilemount sensor kits may be ordered as factory installed on the luminaire, or ordered separately as a field installed accessory kit.
- **Note:** WaveLinx PRO devices are only compatible with the WaveLinx PRO system.
- **Note:** WaveLinx LITE devices are only compatible with the WaveLinx LITE system.


Compliance

- Components are UL recognized and luminaires are cULus listed for 25°C ambient environments. Damp Location Listed.
- Filament material is UL certified.
- BAA compliant & BABA compliant.
- RoHS compliant.
- ISCC certified (for 3D printed materials). PrentaLux products will convert to printing our 3D parts with over 65% recycled or bio-circular materials (using an ISCC certified mass balance approach). Bio-circular materials are raw materials from ISCC Plus certified waste streams and residues including tall oils from the wood processing industry or used cooking oil from the food processing industry.
- Not to be installed in food prep areas and hazardous environments which may expose the product to pollutants such as oil, grease, or VOCs.
- IK02 impact rated. Not for installations in locations such as gymnasiums, arenas, sports complexes, multi-purpose rooms, and any other locations where the fixture potentially will be subject to impacts from external sources.

Sustainability Specifications

- PrentaLux 3D printed parts are produced with at least 65% recycled or bio-circular materials (using an ISCC certified mass balance approach).
- ISCC certified. Certification applies only to 3D printed material.
- Declare compliant.
- LBC Red List approved.

Standard Housing Colors



WHTE - White



BLAK- Black



GRAY - Gray



ROSE - Rose




CAPP - Cappuccino




SAGE - Sage



BRNZ - Bronze




BRSS - Brass



SLVR - Silver

Trim Colors




WHTE - White




BLAK- Black




BRNZ - Bronze



BRSS - Brass



SLVR - Silver



HTCM - Housing Trim Color Match

On-Demand Colors

These On-Demand color options for housing and trims may have extended lead times and/or additional costs. Please consult factory.




ENGR - Enamel Green




MEGR - Metallic Green




MCHA - Matcha




STBL - Steel Blue




MEBL - Metallic Blue




MYBL - Misty Blue




DKGY - Dark Gray



STBR - Stone Brown



MEPU - Metallic Purple




RGLD - Rose Gold



CITR - Citrona




CRWH - Cream White



BURG - Burgundy

Housing Textures


Close up view of textures



Micro Woven (MW)



Natural Lines (NL)



Vertical Fluted (VF)



Checkered (CH)



Quilted Square (QS)



Honeycomb (HC)



Iced Out (IC)




Triangular Pyramids (TP)

Trim Colors


Close up view of trims




WHITE - White




BLAK - Black



SLVR - Silver





BRNZ - Bronze



BRSS - Brass

Cord Mount - Canopy Options



Canopy Colors



DW
Disk - White




DB
Disk - Black




DC
Disk canopy matches Outer Shade color
(Opaque Only)



CW
Conical - White




CB
Conical - Black




CC
Conical canopy matches Outer Shade color
(Opaque Only)

Stem Mount

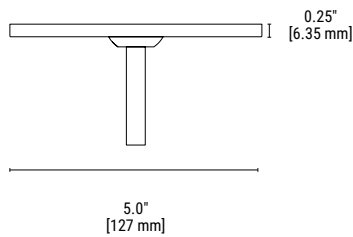

Stem Mount Colors




Stem Kit

CASK36BK18NW = 36" Black Stem Kit
CASK48BK14NW = 48" Black Stem Kit
CASK60BK14NW = 60" Black Stem Kit
CASK72BK14NW = 72" Black Stem Kit

CASK36WT18NW = 36" White Stem Kit
CASK48WT14NW = 48" White Stem Kit
CASK60WT14NW = 60" White Stem Kit
CASK72WT14NW = 72" White Stem Kit


Photometric Data - Medium

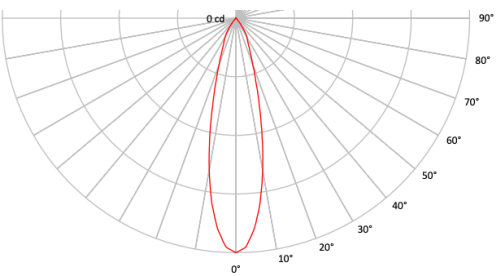PRENTALUX - CYL6 - 6"- MEDIUM - @ 3500K / 90 CRI		
	Light Level 74L	
Filename	PRLX-CYL6-935-74L-MD-U-S-X-X-WHTE.ies	
Test No.	P979497	
Lumcat	PRLX-CYL6-935-74L-MD-U-S-X-X-WHTE	
Lumens	7482 Lm	
Input Watts	61.5 W	
Efficacy LPW	121.7 Lm/W	
CCT	3500K	
Spacing Criteria (0/90/45)	0.43 / 0.43 / 0.44	

Lumen/Wattage/LPW Table - Medium

CRI	LL	CCT	Lumens	WATTS	EFFICACY (Lm/W)
90	12L	2700	1117	7.5	149
		3000	1184	7.5	157.9
		3500	1224	7.5	163.2
		4000	1269	7.5	169.2
	18L	2700	1633	11	148.5
		3000	1731	11	157.4
		3500	1789	11	162.6
		4000	1855	11	168.7
	23L	2700	2144	15	142.9
		3000	2272	15	151.5
		3500	2348	15	156.5
		4000	2435	15	162.3
	31L	2700	2893	20.6	140.4
		3000	3067	20.6	148.9
		3500	3169	20.6	153.8
		4000	3287	20.6	159.5
	43L	2700	3969	29.5	134.5
		3000	4207	29.5	142.6
		3500	4347	29.5	147.3
		4000	4508	29.5	152.8
	48L	2700	4422	33.5	132
		3000	4688	33.5	139.9
		3500	4843	33.5	144.6
		4000	5023	33.5	150
	62L	2700	5759	48	120
		3000	6106	48	127.2
		3500	6308	48	131.4
		4000	6543	48	136.3
	74L	2700	6832	61.5	111.1
		3000	7243	61.5	117.8
		3500	7482	61.5	121.7
		4000	7760	61.5	126.2


Photometric Data - Flood

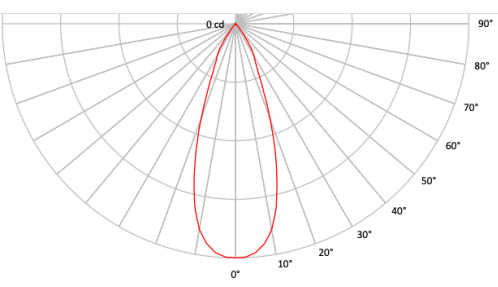PRENTALUX - CYL6 - 6" - FLOOD - @ 3500K / 90 CRI		
	Light Level 74L	
Filename	PRLX-CYL6-935-74L-FL-U-S-X-WHITE.ies	
Test No.	P979495	
Lumcat	PRLX-CYL6-935-74L-FL-U-S-X-WHITE	
Lumens	7384 Lm	
Input Watts	61.5 W	
Efficacy LPW	120.1 Lm/W	
CCT	3500K	
Spacing Criteria (0/90/45)	0.32 / 0.32 / 0.33	

Lumen/Wattage/LPW Table - Flood

CRI	LL	CCT	LUMENS	WATTS	EFFICACY (Lm/W)
90	12L	2700	1103	7.5	147
		3000	1169	7.5	156
		3500	1208	7.5	161
		4000	1253	7.5	167
	18L	2700	1612	11	147
		3000	1709	11	155
		3500	1766	11	161
		4000	1831	11	167
	23L	2700	2116	15	141
		3000	2243	15	150
		3500	2317	15	155
		4000	2403	15	160
	31L	2700	2855	20.5	139
		3000	3027	20.5	148
		3500	3127	20.5	153
		4000	3244	20.5	158
	43L	2700	3917	29.5	133
		3000	4152	29.5	141
		3500	4290	29.5	145
		4000	4449	29.5	151
	48L	2700	4364	33.5	130
		3000	4627	33.5	138
		3500	4780	33.5	143
		4000	4958	33.5	148
	62L	2700	5684	48	118
		3000	6026	48	126
		3500	6226	48	130
		4000	6457	48	135
	74L	2700	6743	61.5	110
		3000	7148	61.5	116
		3500	7385	61.5	120
		4000	7659	61.5	125

Photometric Data - Wide Flood

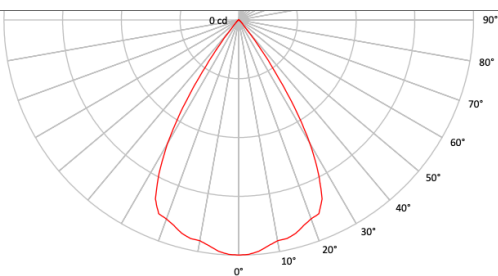PRENTALUX - CYL6 - 6"- WIDE FLOOD - @ 3500K / 90 CRI		
	Light Level 74L	
Filename	PRLX-CYL6-935-74L-WD-U-S-X-X-WHTE.ies	
Test No.	P979499	
Lumcat	PRLX-CYL6-935-74L-WD-U-S-X-X-WHTE	
Lumens	7213 Lm	
Input Watts	61.5 W	
Efficacy LPW	117.3 Lm/W	
CCT	3500K	
Spacing Criteria (0/90/45)	1.05 / 1.05 / 0.91	

Lumen/Wattage/LPW Table - Wide Flood

CRI	LL	CCT	LUMENS	WATTS	EFFICACY (Lm/W)
90	12L	2700	1077	7.5	144
		3000	1141	7.5	152
		3500	1180	7.5	157
		4000	1224	7.5	163
	18L	2700	1575	11	143
		3000	1668	11	152
		3500	1724	11	157
		4000	1788	11	163
	23L	2700	2067	15	138
		3000	2191	15	146
		3500	2262	15	151
		4000	2347	15	157
	31L	2700	2788	20.5	136
		3000	2957	20.5	144
		3500	3055	20.5	149
		4000	3169	20.5	155
	43L	2700	3824	29.5	130
		3000	4056	29.5	138
		3500	4191	29.5	142
		4000	4346	29.5	147
	48L	2700	4263	33.5	127
		3000	4520	33.5	135
		3500	4669	33.5	139
		4000	4843	33.5	145
	62L	2700	5550	48	116
		3000	5887	48	123
		3500	6082	48	127
		4000	6308	48	131
	74L	2700	6586	61.5	107
		3000	6979	61.5	114
		3500	7214	61.5	117
		4000	7482	61.5	122

WaveLinx LITE - WLST Tilemount Sensor

WaveLinx Lite

Email *

Password *

LOG IN

[Forgot Password](#)

No trapping in your system is a
 Distinguished Contributor to Ethical Business



COOPER
 Learning Systems



- Intuitive Android™ or Apple® iOS® app for basic system code compliant set up and configuration via Bluetooth
- Up to 28 unique areas per project site (WaveLinx LITE Bluetooth network)
- Up to 50 devices for an area, any one of 16 control zones, up to 6 occupancy sets, and custom lighting scenes
- Automatic occupancy or vacancy, sensor sensitivity, daylight dimming, etc. configurable through the app
- Refer to the WaveLinx system specifications for details




WaveLinx LITE Bluetooth Enabled System

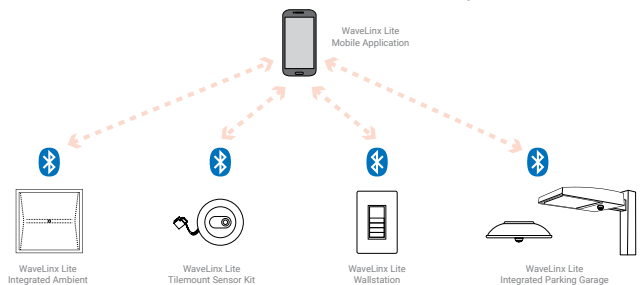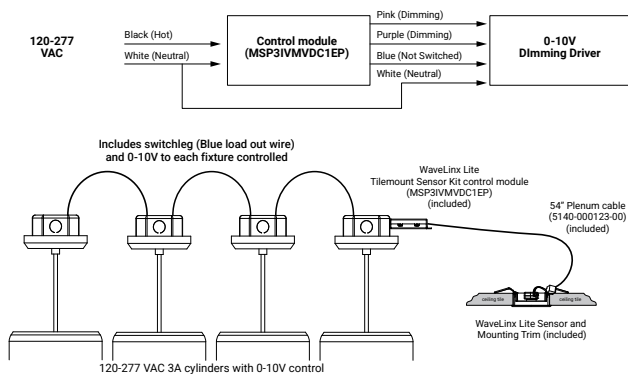


WaveLinx PRO devices only compatible with the WaveLinx PRO system.



- WaveLinx PRO Wireless functionality configures zones and customizes settings from one secure mobile app
- Automatic code commissioning that meets the strictest codes
- Fixtures and sensors integrate with Wireless Area Controller, Wall Stations, and Control Devices
- Stand-Alone Offices or Entire Building Network Installations


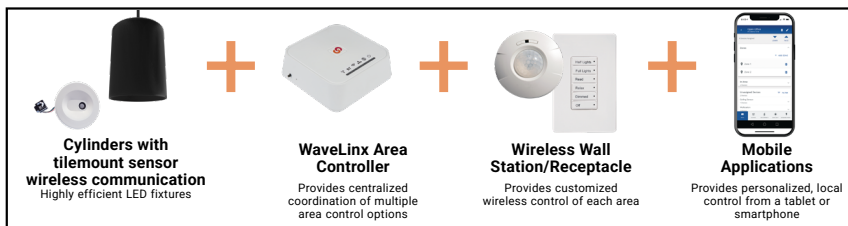


WaveLinx mobile app settings

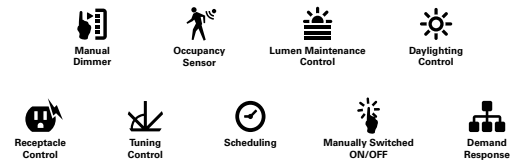

WaveLinx PRO WPST Tilemount Wiring Diagram

WaveLinx CORE Building Management Integration

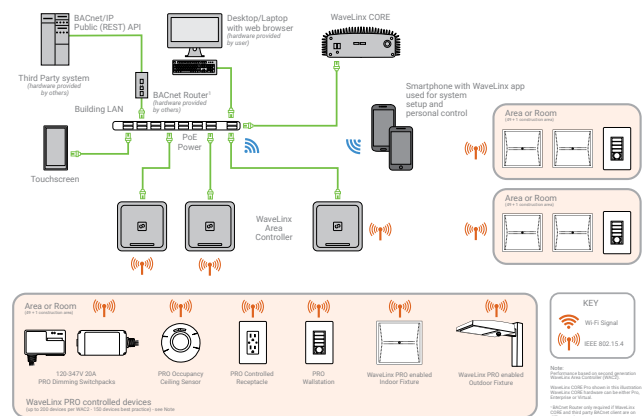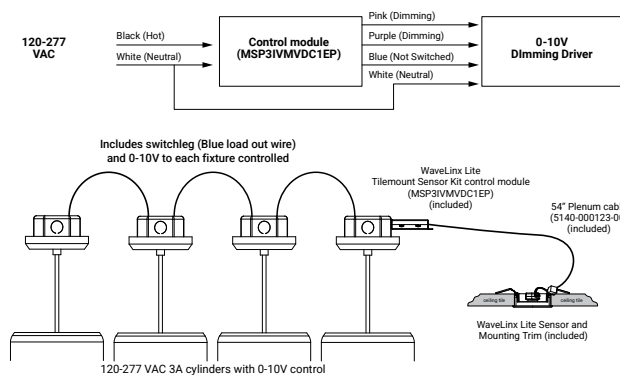

Connected Solutions



WaveLinX LITE Wireless Node - WLN


WaveLinX LITE devices only compatible with the WaveLinX LITE system.

- Intuitive Android™ or Apple® iOS® app for basic system code compliant set up and configuration via Bluetooth
- Up to 28 unique areas per project site (WaveLinX LITE Bluetooth network)
- Up to 50 devices for an area, any one of 16 control zones, up to 6 occupancy sets, and custom lighting scenes
- Refer to the WaveLinX system specifications for details
- **Not available with BioUp or Tunable White**


WaveLinX mobile app settings



WaveLinX LITE Wireless Node (WLN) Wiring Diagram

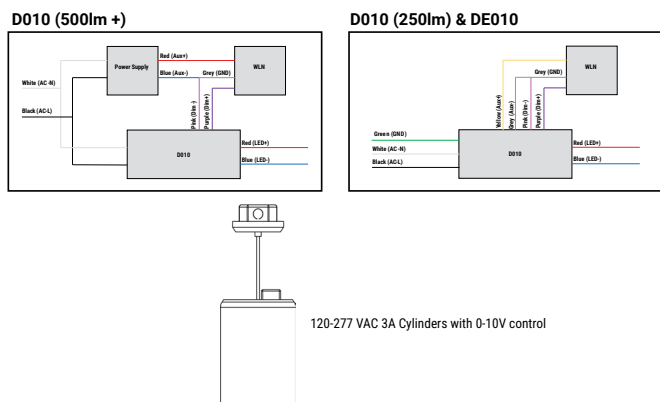

WaveLinX LITE Bluetooth Enabled System

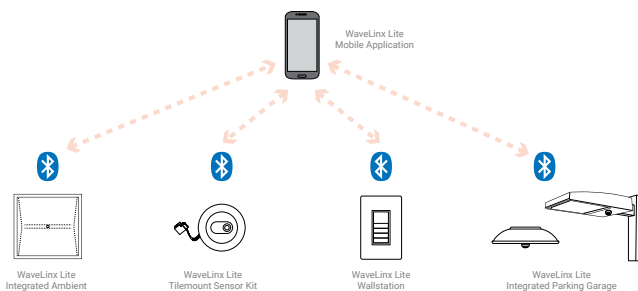


WaveLinX PRO Wireless Node - WPN


WaveLinX PRO devices only compatible with the WaveLinX PRO system.

- WaveLinX Wireless functionality configures zones and customizes settings from one secure mobile app
- Automatic code commissioning that meets the strictest codes
- Fixtures and sensors integrate with WaveLinX Area Controller, Wall Stations, and Control Devices
- Stand-Alone Offices or Entire Building Network Installations

WaveLinX mobile app settings

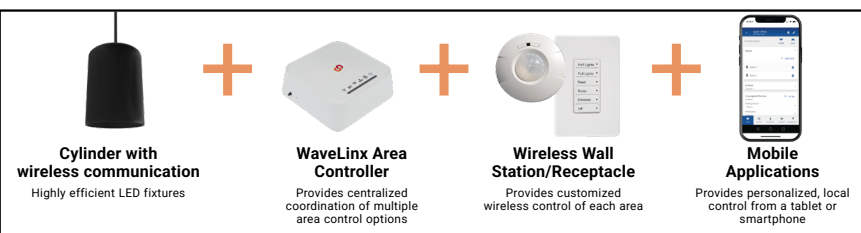

WaveLinX PRO Wireless Node (WPN) Wiring Diagram

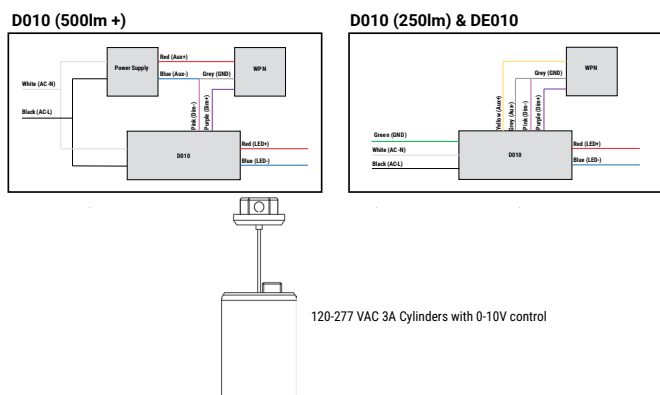

WaveLinX CORE Building Management Integration

