Physical Config Desktop Custom Interface

Command Prompt

```
PC ping 192.168.1.33

Pinging 192.168.1.33 with 32 bytes of data:

Reply from 192.168.1.33: bytes=32 time=93ms TTL=255
Reply from 192.168.1.33: bytes=32 time=0ms TTL=255
Reply from 192.168.1.33: bytes=32 time=0ms TTL=255
Reply from 192.168.1.33: bytes=32 time=0ms TTL=255

Ping statistics for 192.168.1.33:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 93ms, Average = 30ms

PC ping 192.168.1.42

Pinging 192.168.1.42 with 32 bytes of data:

Reply from 192.168.1.42: bytes=32 time=1ms TTL=128
Reply from 192.168.1.42: bytes=32 time=0ms TTL=128
Reply from 192.168.1.42: bytes=32 time=0ms TTL=128
Reply from 192.168.1.42: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.1.42:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

PC>
```

Command Prompt

```
PC>ping 192.168.1.11

Pinging 192.168.1.11 with 32 bytes of data:

Reply from 192.168.1.11: bytes=32 time=16ms TTL=128
Reply from 192.168.1.11: bytes=32 time=1ms TTL=128
Reply from 192.168.1.11: bytes=32 time=11ms TTL=128
Reply from 192.168.1.11: bytes=32 time=6ms TTL=128

Ping statistics for 192.168.1.11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss)
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 16ms, Average = 8ms

PC>ping 192.168.1.12

Pinging 192.168.1.12 with 32 bytes of data:

Reply from 192.168.1.12: bytes=32 time=41ms TTL=128
Reply from 192.168.1.12: bytes=32 time=1ms TTL=128
Reply from 192.168.1.12: bytes=32 time=0ms TTL=128
Reply from 192.168.1.12: bytes=32 time=0ms TTL=128

Ping statistics for 192.168.1.12:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss)
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 41ms, Average = 10ms

PC>
```

PC

Physical Config Desktop Custom Interface

GLOBAL
Settings
Algorithm Settings
INTERFACE
FastEthernet0

FastEthernet0

Port Status: On
Bandwidth: 100 Mbps, 10 Mbps, Auto
Duplex: Half Duplex, Full Duplex, Auto
MAC Address: 0005.5EC9.8238

IP Configuration
- DHCP
- Static

IP Address: 192.168.1.41
Subnet Mask: 255.255.255.224

IPv6 Configuration
- DHCP
- Auto Config
- Static

IPv6 Address:
Link Local Address: FE80::205:5EFF:FEC9:8238

IP Address	Subnet Mask	Default Gateway
192.168.0.1	255.255.255.0	
192.168.0.2	255.255.255.0	192.168.0.1
192.168.0.3	255.255.255.0	192.168.0.1
192.168.0.4	255.255.255.0	192.168.0.1

Wireless Security

Select wireless security

Set the security mode to WEP

Set key as 0123456789

Click save settings

Go to the wireless network

PC5

Desktop → PC wireless

Set the connect tabs

Refresh

Another network

Connect


Verify the connection

Check PC1 and PC2

Verify the wireless LAN after connecting all the PCs

Wireless LAN was successfully configured in Packet Tracer using a Linksys wireless router

Network static IP addresses and configured and PC0

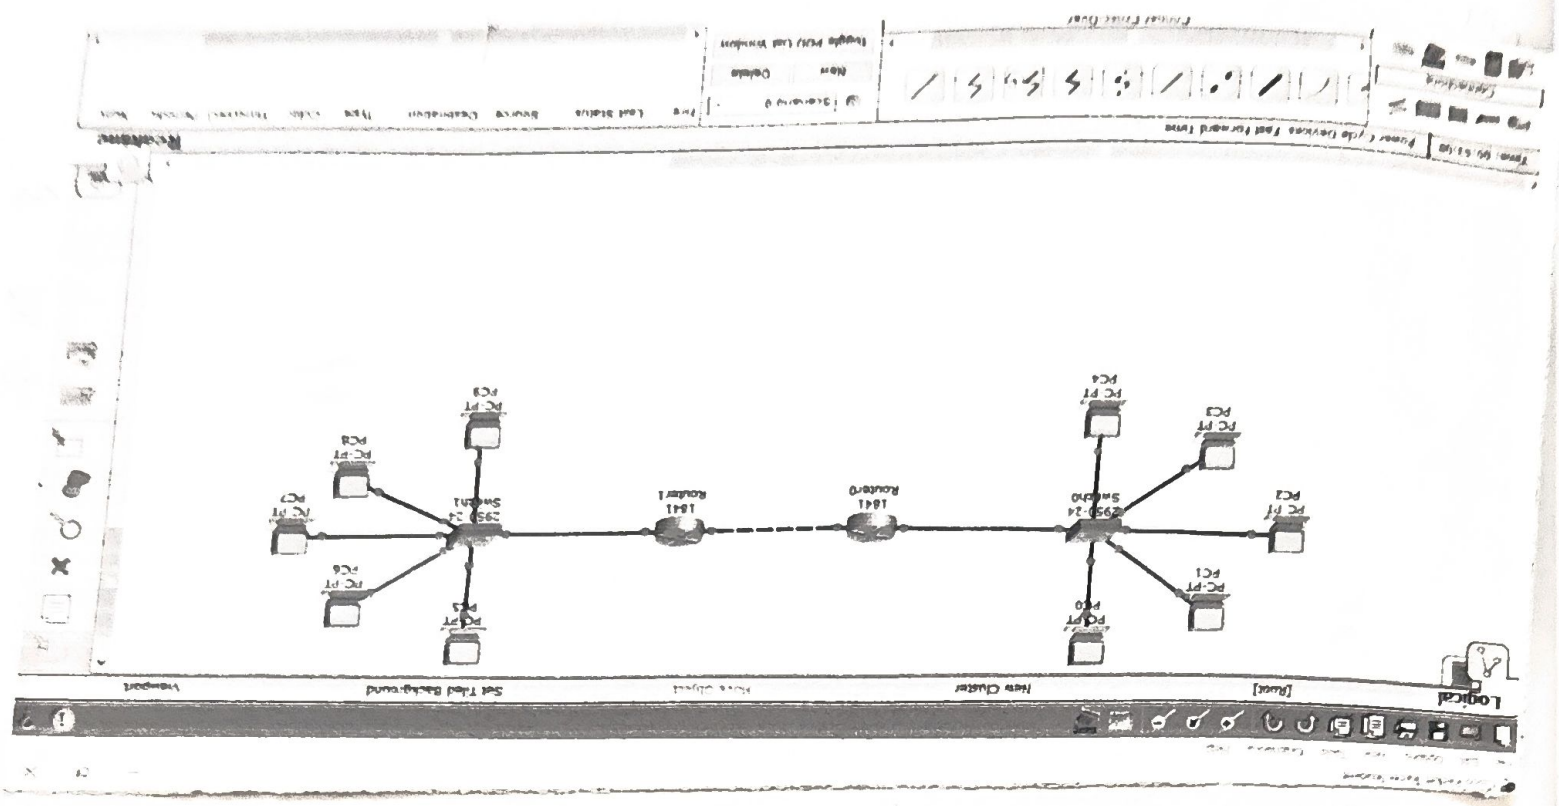

Router0

Physical Config CLI

IOS Command Line Interface

```
exit
Router$
%SYS-5-CONFIG_I: Configured from console by console
configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)$interface FastEthernet0/1
Router(config-if)$ip address 192.168.1.1 255.255.255.224
% 192.168.1.0 overlaps with FastEthernet0/0
Router(config-if)$no shutdown
Router(config-if)$exit
Router(config)$interface FastEthernet0/0
Router(config-if)$ip address 192.168.1.65 255.255.255.224
% 192.168.1.64 overlaps with FastEthernet0/1
Router(config-if)$no shutdown
Router(config-if)$exit
Router(config)$do show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol

FastEthernet0/0        192.168.1.1     YES manual up                    down

FastEthernet0/1        192.168.1.65    YES manual up                    up

Vlan1                  unassigned      YES unset  administratively down down
Router(config)$
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to
up
```

Copy Paste

