Exp. 11.a
29/9/26

Simulate static routing configuration using Cisco packet tracer.

Aim:


To simulate a static routing configuration using Cisco packet tracer.

Procedure.

* Open Cisco Packet Tracer and create the given network topology
* Connect 3 routers and PC's using suitable cable
* Configure IP address for routers and PC's
* Enable all router interface using no shutdown.
* Configure static router on Router 0; router 1, router 2 using ip mobile.
* Set main and backup router using different administrative distance values
* Test connectivity
* Use trace to verify the routing path
* Disconnect the main link and verify that the backup router works.
* Thus a static routing is successfully configured and verified.

Result:

11. a

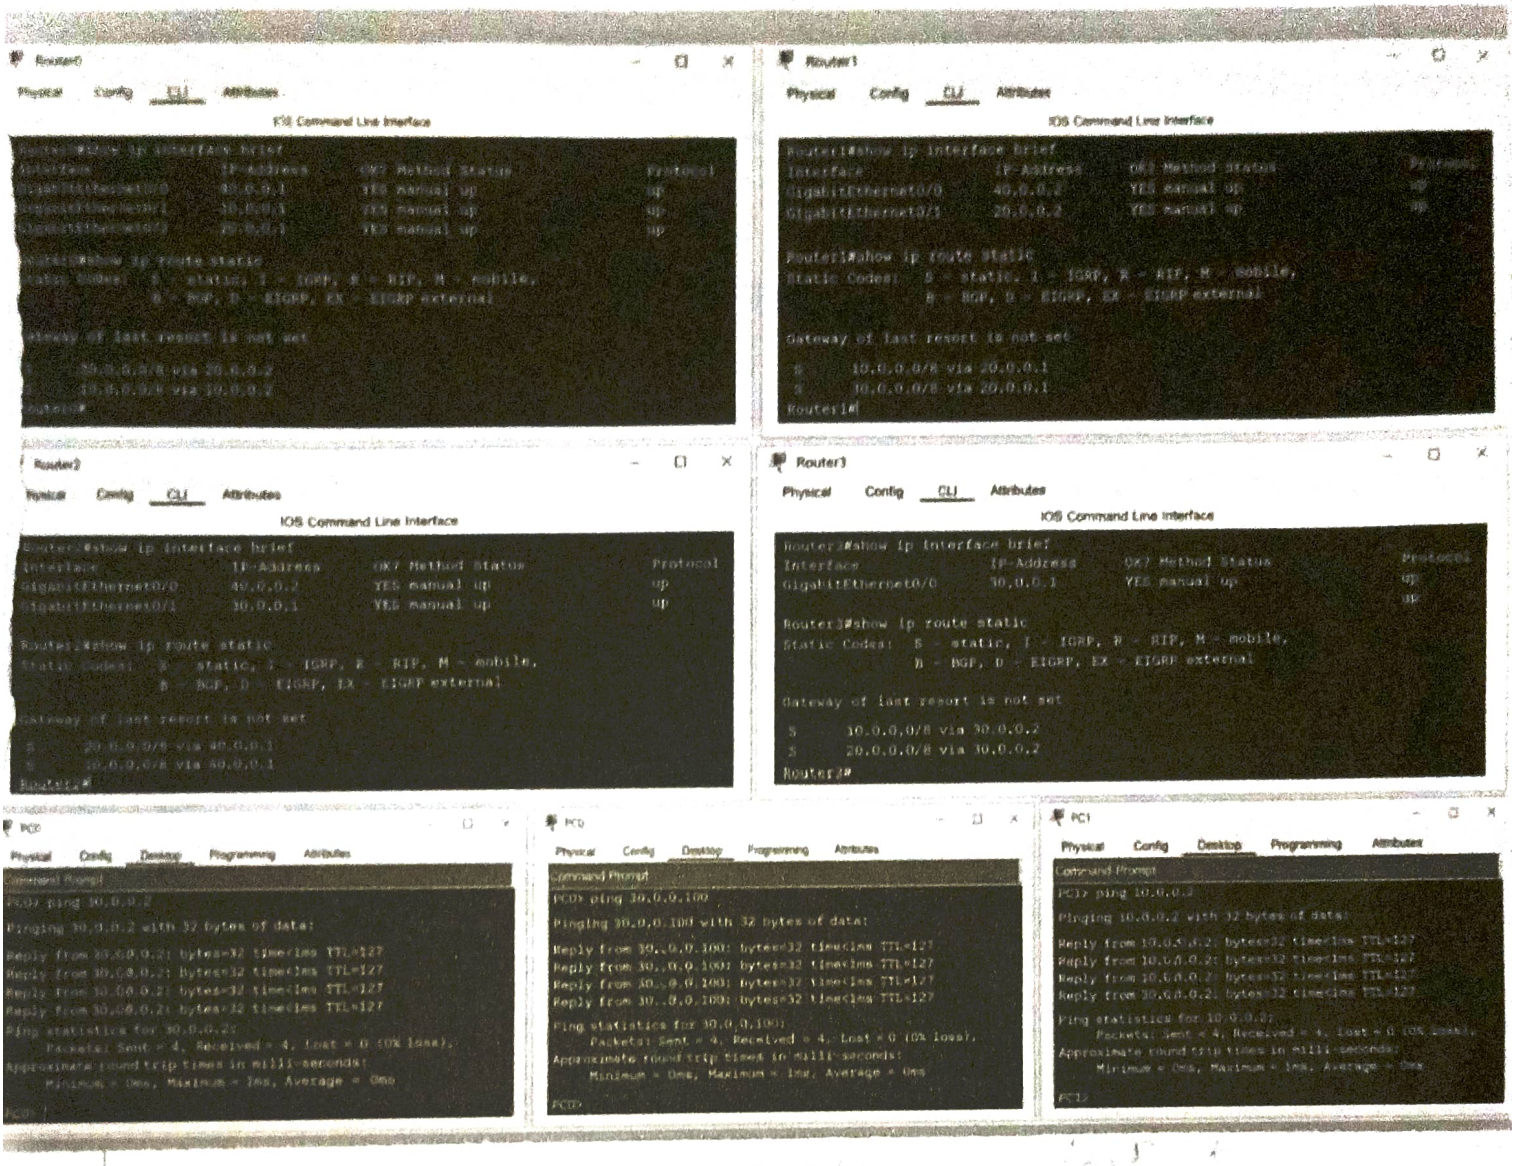

11. b

PC0 — Command Prompt (ping)

```
C:\> ping 20.0.0.2

Pinging 20.0.0.2 with 32 bytes of data:

Reply from 20.0.0.2: bytes=32 time=1ms TTL=126
Reply from 20.0.0.2: bytes=32 time=1ms TTL=126
Reply from 20.0.0.2: bytes=32 time=1ms TTL=126
Reply from 20.0.0.2: bytes=32 time=1ms TTL=126

Ping statistics for 20.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss)
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\> tracert 20.0.0.2
Tracing route to 20.0.0.2 over a maximum of 30 hops:

  1     1 ms      1 ms      1 ms   10.0.0.1
  2     2 ms      2 ms      2 ms   192.168.1.253
  3     3 ms      3 ms      3 ms   20.0.0.2

Trace complete.

C:\>
```

Exp: 11b
29/9/26.

Simulate RIP using CISCO PACKET TRACER.

Aim:

To Simulate RIP using Cisco Packet Tracer.

Procedure:

* Create the topology with 3 routers and 2 PCs
* Connect the device using suitable cables
* Assign the given IP address to both PCs
* Configure Fast Ethernet and serial Interface of all routers
* Enable interface using router rip
* Add directly connected networks using the network command
* Test connectivity using ping 20.0.0.2
* Use traces 20.0.0.2 to verify the selected route
* Disconnect the direct Router 0 - Router 2 link and use tracert again to verify RIP selects the alternate route.

Result:

Thus static routing configuration & RIP is simulated using CISCO PACKET TRACER.