






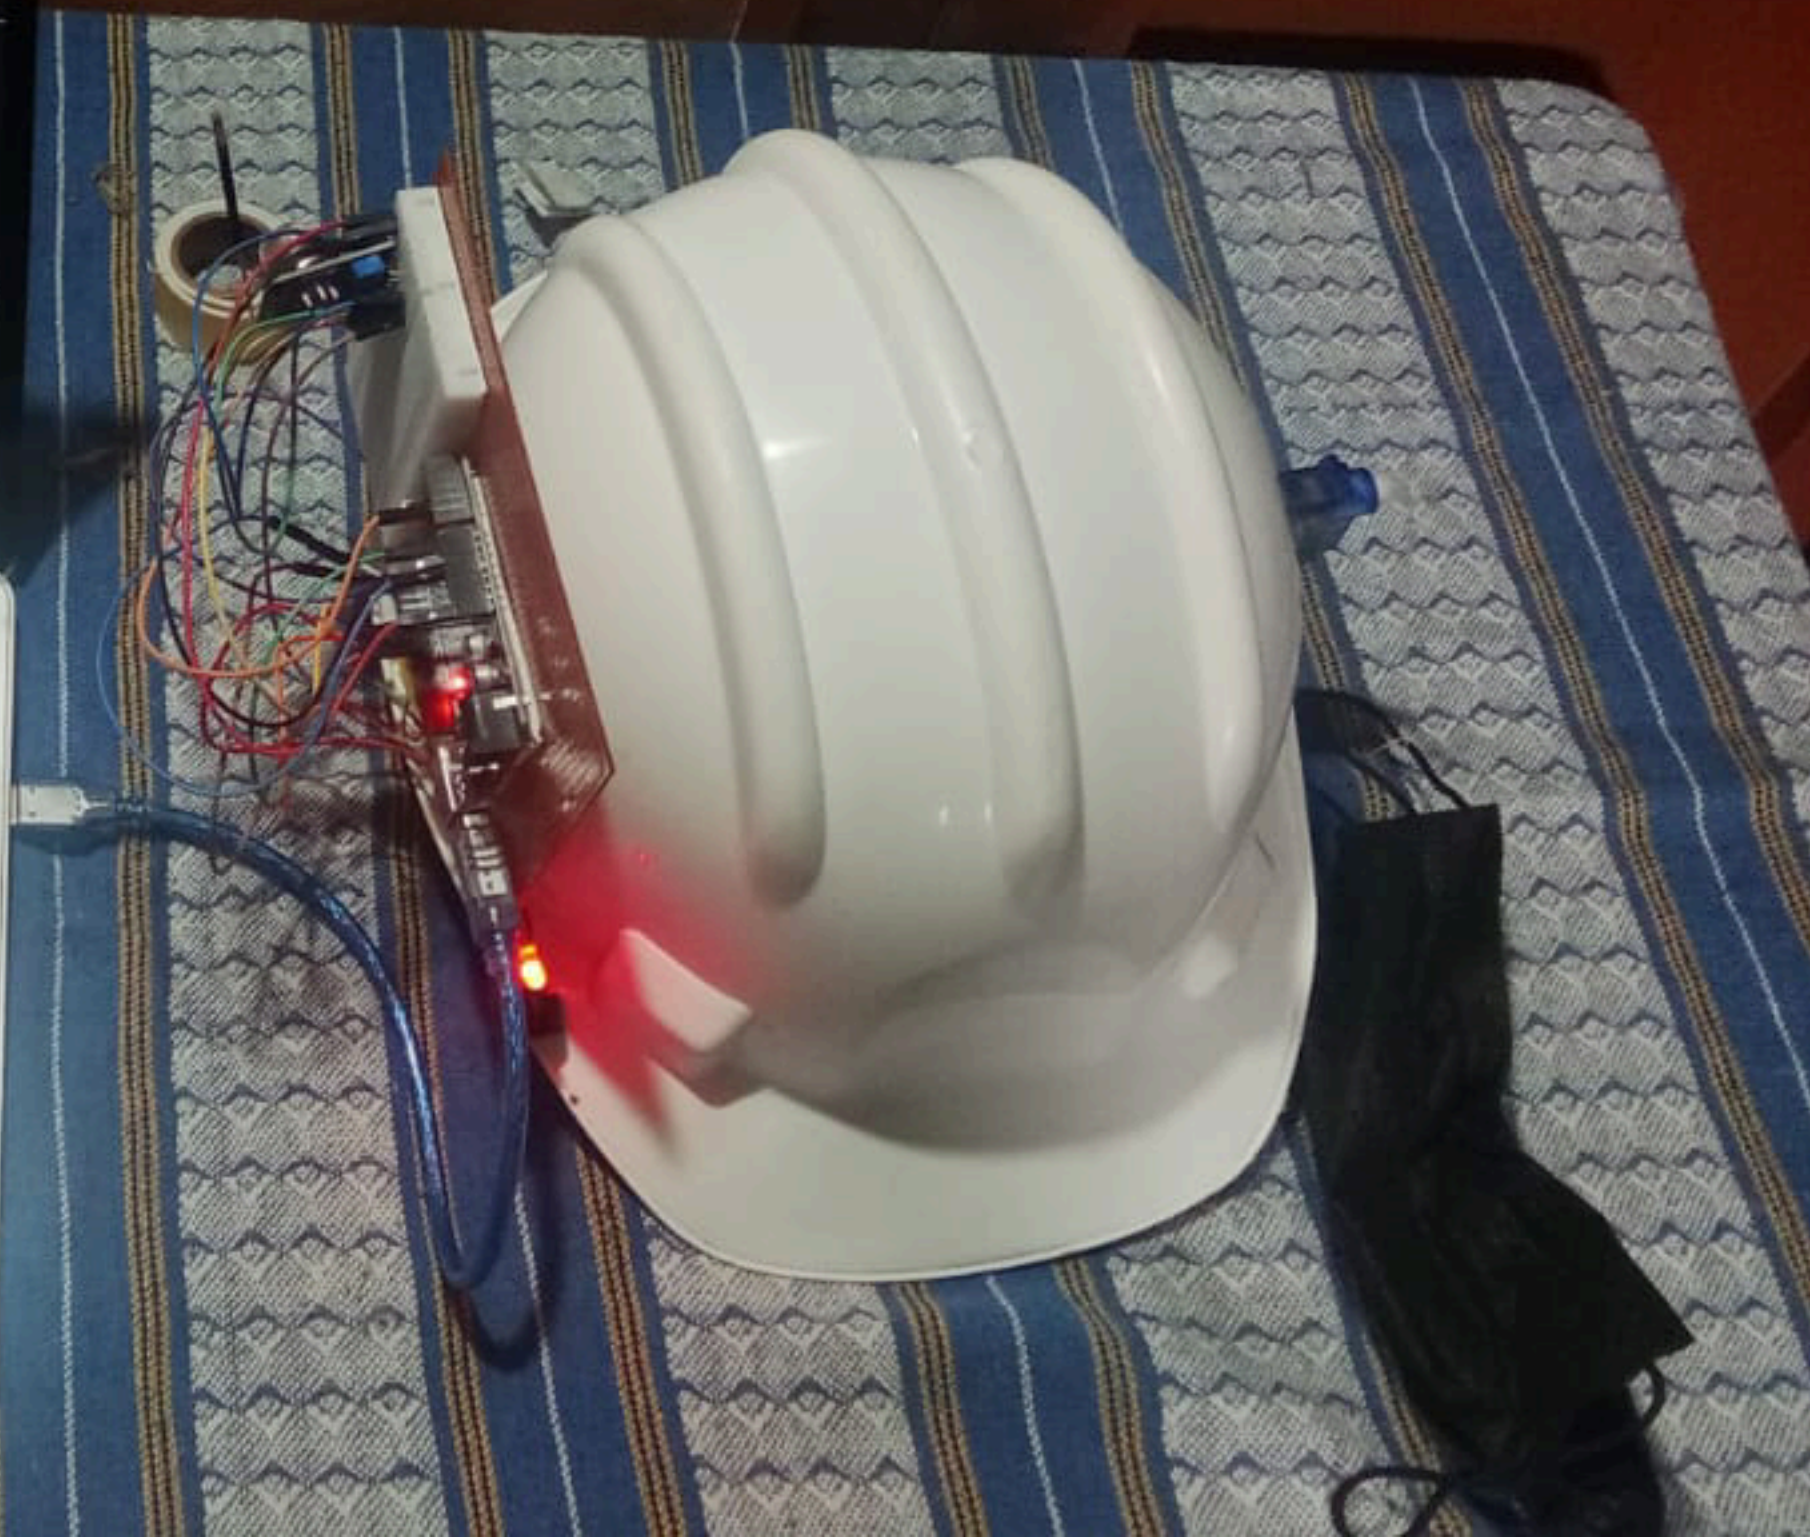

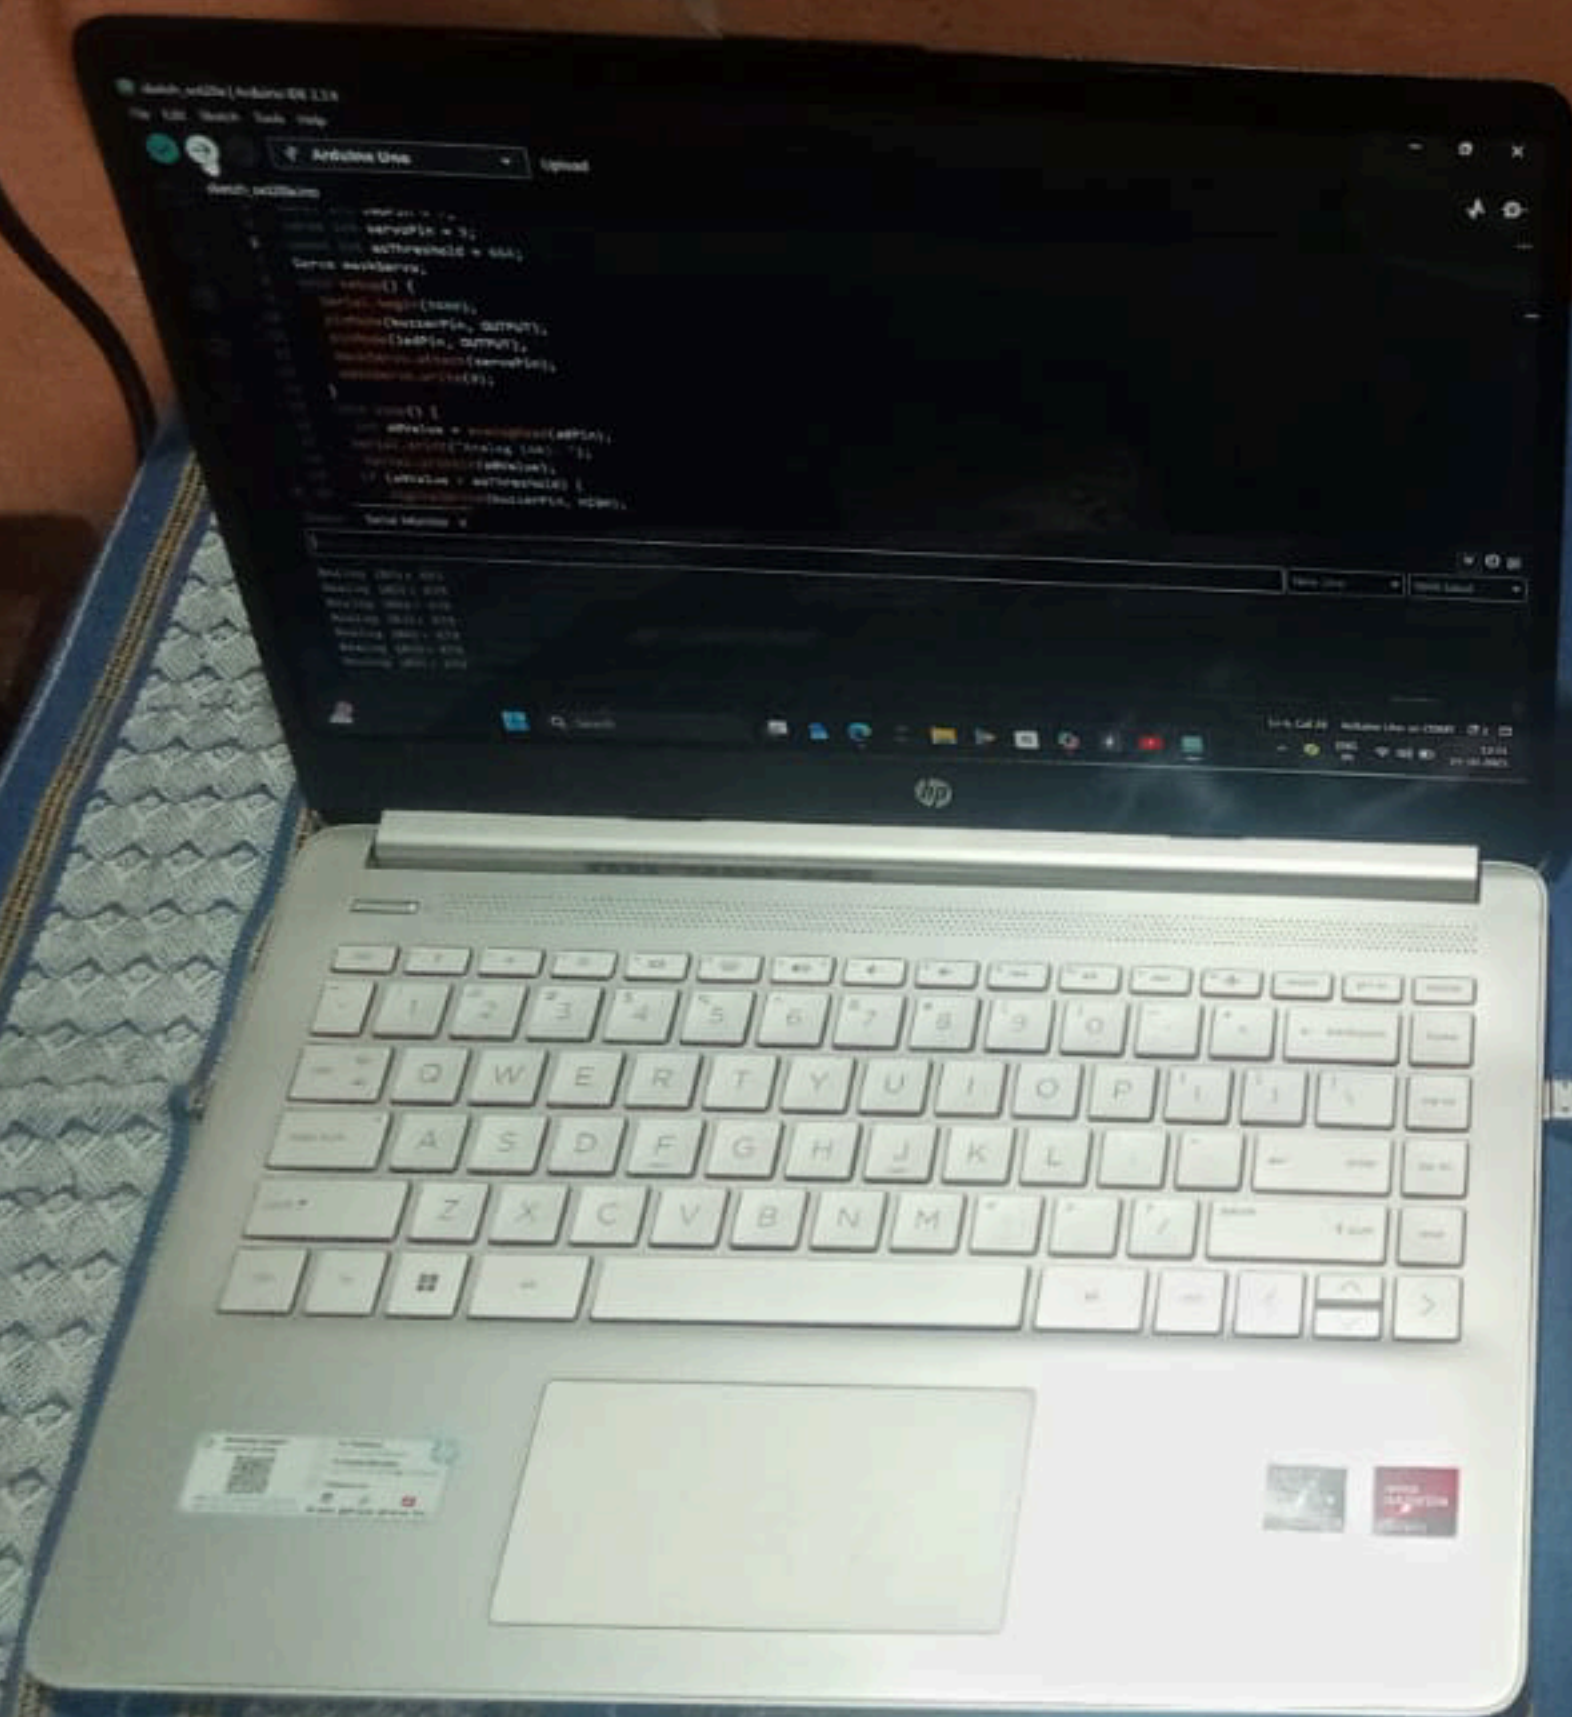

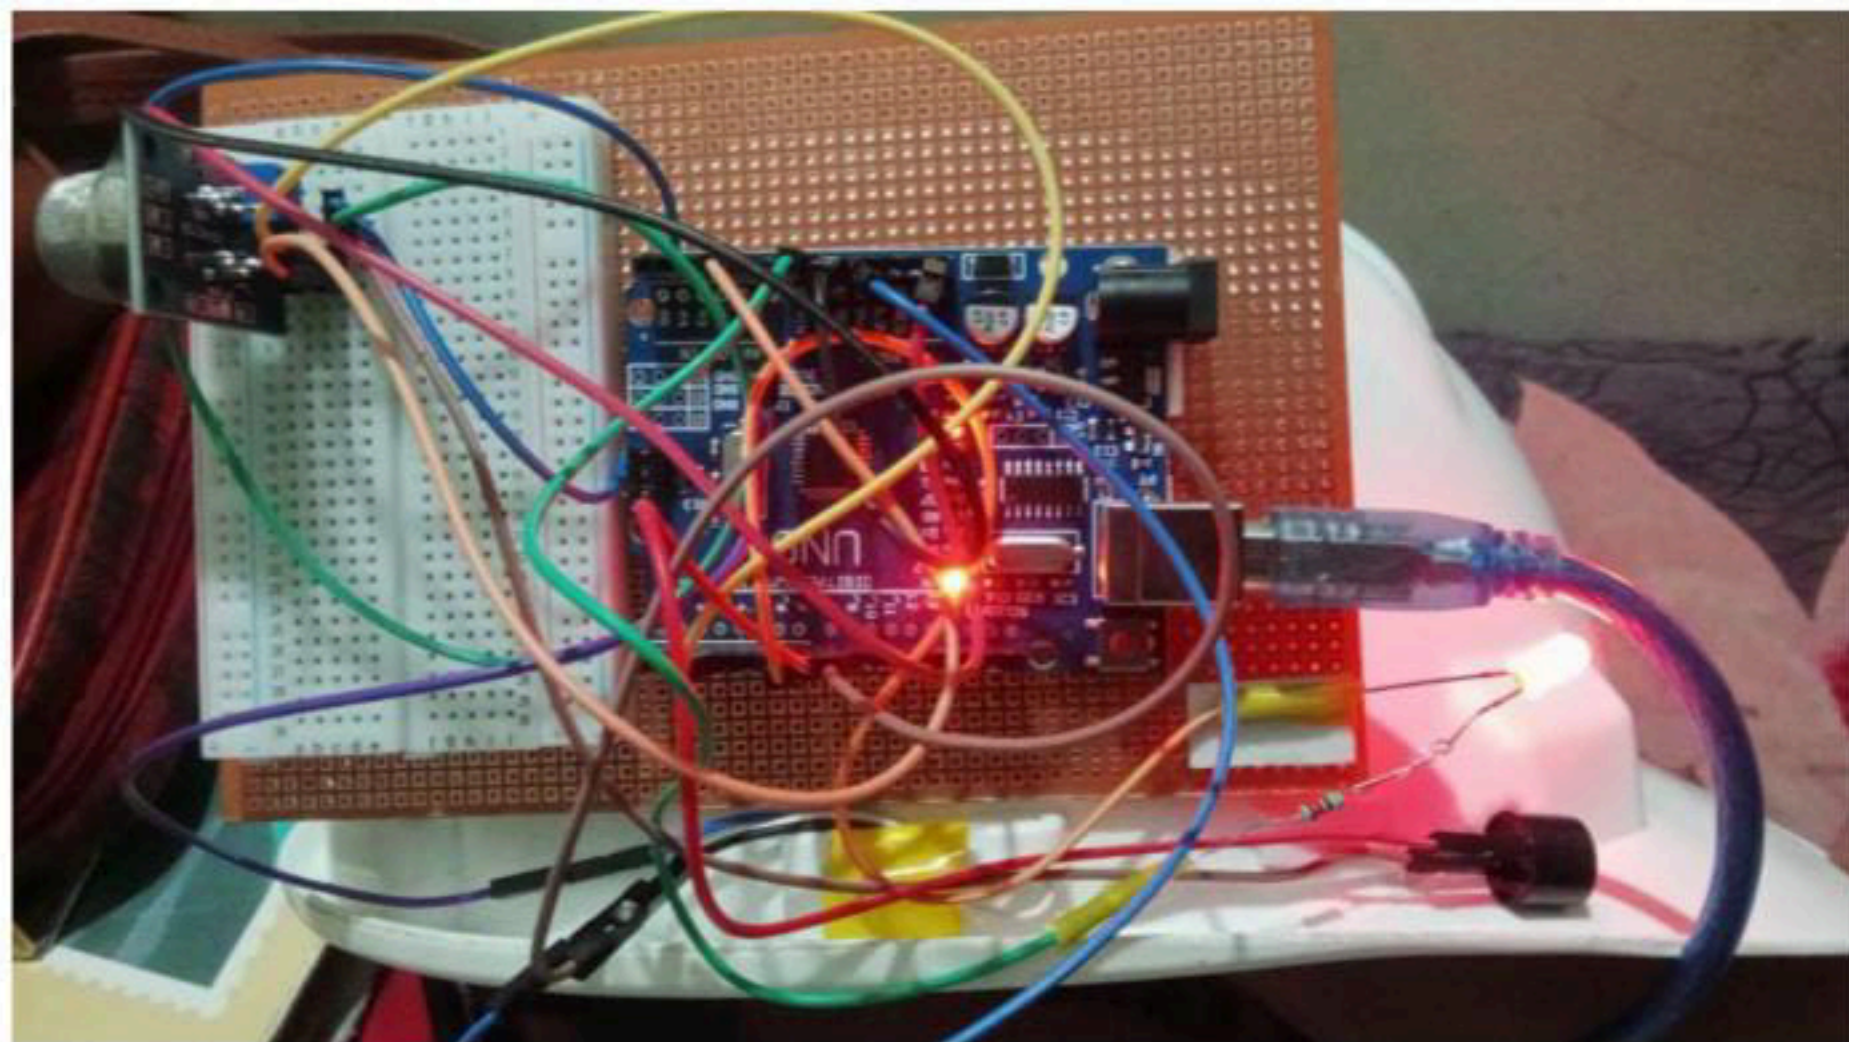

Arduino Uno



sketch_oct20a.ino



```
1  #include <Servo.h>
2  const int a0Pin = A0;
3  const int buzzerPin = 8;
4  const int ledPin = 7;
5  const int servoPin = 9;
6  const int aoThreshold = 600;
7  Servo maskServo;
8  void setup() {
9      Serial.begin(9600);
10     pinMode(buzzerPin, OUTPUT);
11     pinMode(ledPin, OUTPUT);
12     maskServo.attach(servoPin);
13     maskServo.write(0);
14 }
15 void loop() {
16     int a0Value = analogRead(a0Pin);
17     Serial.print("Analog (A0): ");
18     Serial.println(a0Value);
19     if (a0Value > aoThreshold) {
20         digitalWrite(buzzerPin, HIGH);
21         digitalWrite(ledPin, HIGH);
22         maskServo.write(90);
23     } else {
24         digitalWrite(buzzerPin, LOW);
25         digitalWrite(ledPin, LOW);
```



Arduino Uno



sketch_oct20a.ino



```
5  const int servoPin = 9;
6  const int aoThreshold = 600;
7  Servo maskServo;
8  void setup() {
9      Serial.begin(9600);
10     pinMode(buzzerPin, OUTPUT);
11     pinMode(ledPin, OUTPUT);
12     maskServo.attach(servoPin);
13     maskServo.write(0);
14 }
15 void loop() {
16     int a0Value = analogRead(a0Pin);
17     Serial.print("Analog (A0): ");
18     Serial.println(a0Value);
19     if (a0Value > aoThreshold) {
20         digitalWrite(buzzerPin, HIGH);
21         digitalWrite(ledPin, HIGH);
22         maskServo.write(90);
23     } else {
24         digitalWrite(buzzerPin, LOW);
25         digitalWrite(ledPin, LOW);
26         maskServo.write(0);
27     }
28     delay(1000);
29 }
```