EXP. NO. 10a

Date: Internetworking with routers in CISCO PACKET TRACER

Aim: To implement internetworking with routers in Cisco packet tracer simulator.

In this network, a router and 2 PC's are used. Computers are connected to Cisco routers using a copper-Straight through cable. After forming the network, to check network connectivity a simple PDU is transferred from PC0 to PC1.

Procedure:

Step 1 (Configuring Router):

(1) Select router. Open CLI

(2) press enter to start configuring router.

(3) Type enable to activate the privileged mode.

Step 2: Configuring PC's

(1) Assign ip address to every PC in the network.

(2) Select PC, Go to desktop, Select ip configuration

(3) Assign default gateway of PC0 as 192.168.10.1

(4) Assign default gateway of PC1 as 192.168.20.1

Step 3: Connecting PC with Router.


(1) Connect FastEthernet0 port of PC0 with FastEthernet0 port of Router1 using a copper Straight through cable.

Router configuration table

device name	Ip address	subnet mask	Ip address	subnet mask
ROUTER1	192.168.10.1	255.255.255.0	192.168.20.1	255.255.255.0

PC configuration table

Device name	Ip address	subnet mask	Gateway
PC0	192.168.10.2	255.255.255.0	192.168.10.1
PC1	192.168.20.2	255.255.255.0	192.168.20.1

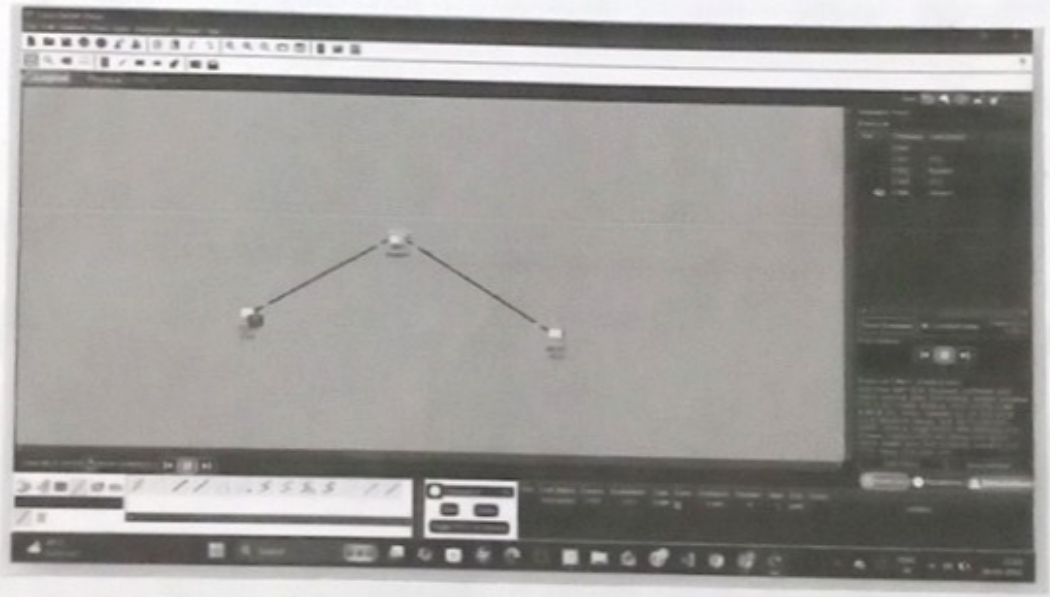

Result :

Thus internetworking with routers

Experiment 10 b

30/10/26

Design & configure an internetwork using wireless router, DHCP server, internet cloud.

Addressing table

Device	Interface	IP address	Subnet mask	Default gateway
PC	FastEthernet0	DHCP		192.168
Wireless Router	LAN	192.168.0.1	255.255.255.0	
Wireless Router	Internet	DHCP		
Cisco Com Server	FastEthernet0	208.67.220.220		
Laptop	Wireless0	DHCP		

Part 1: Build a simple network in logical topology

Step 1: Launch packet Tracer.

Step 2: Build the topology.

(a) Add network devices to the workspace.

(b) change display names of the networking devices

(c) Add the physical cabling between devices on the workspace.

Part 2 : Configure

Step 1 : Configure the wireless Router

Step 2 : ~~click on~~ Configure the Laptop

Step 3 : Configure the PC

Step 4 : Configure the Internet cloud

Step 5 : Configure cisco.com Server


Part 3 : Verify Connectivity.

Step 1 : Refresh IPv4 Settings on PC

* Verify that PC is receiving IPv4 configuration Information from DHCP.

* Test Connectivity to the cisco.com Server from the PC

Part 4 : Save the file and close Packet Tracer.

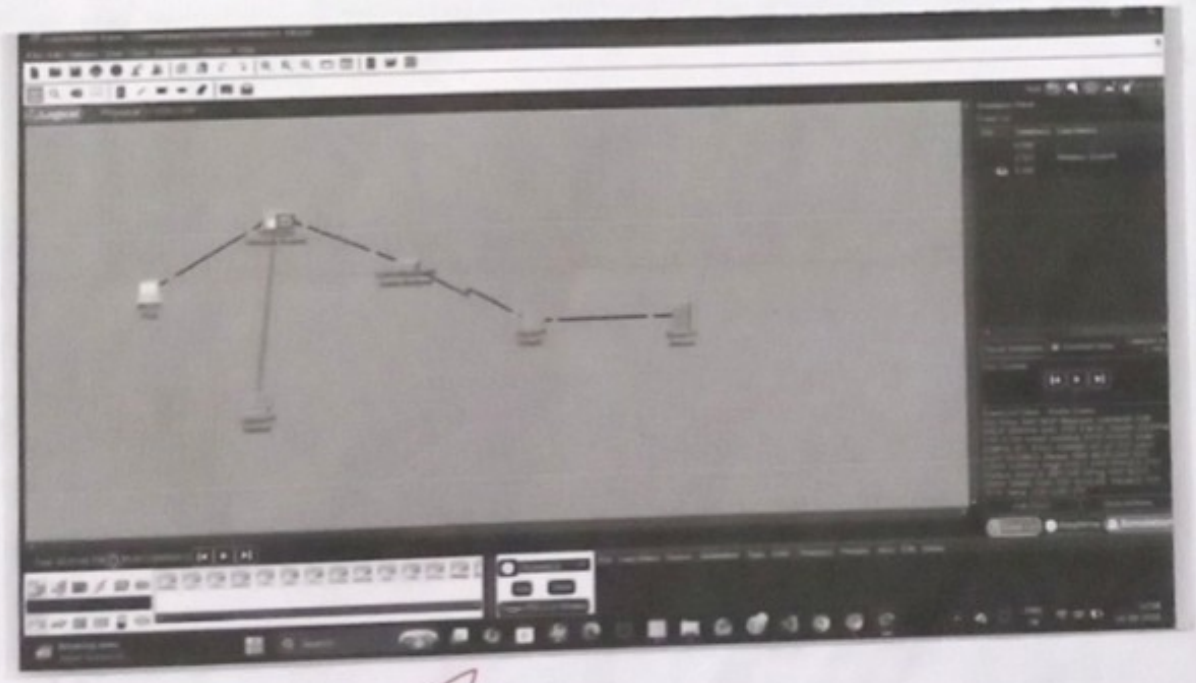

Result :

Thus Interconnection using wireless router has been implemented