


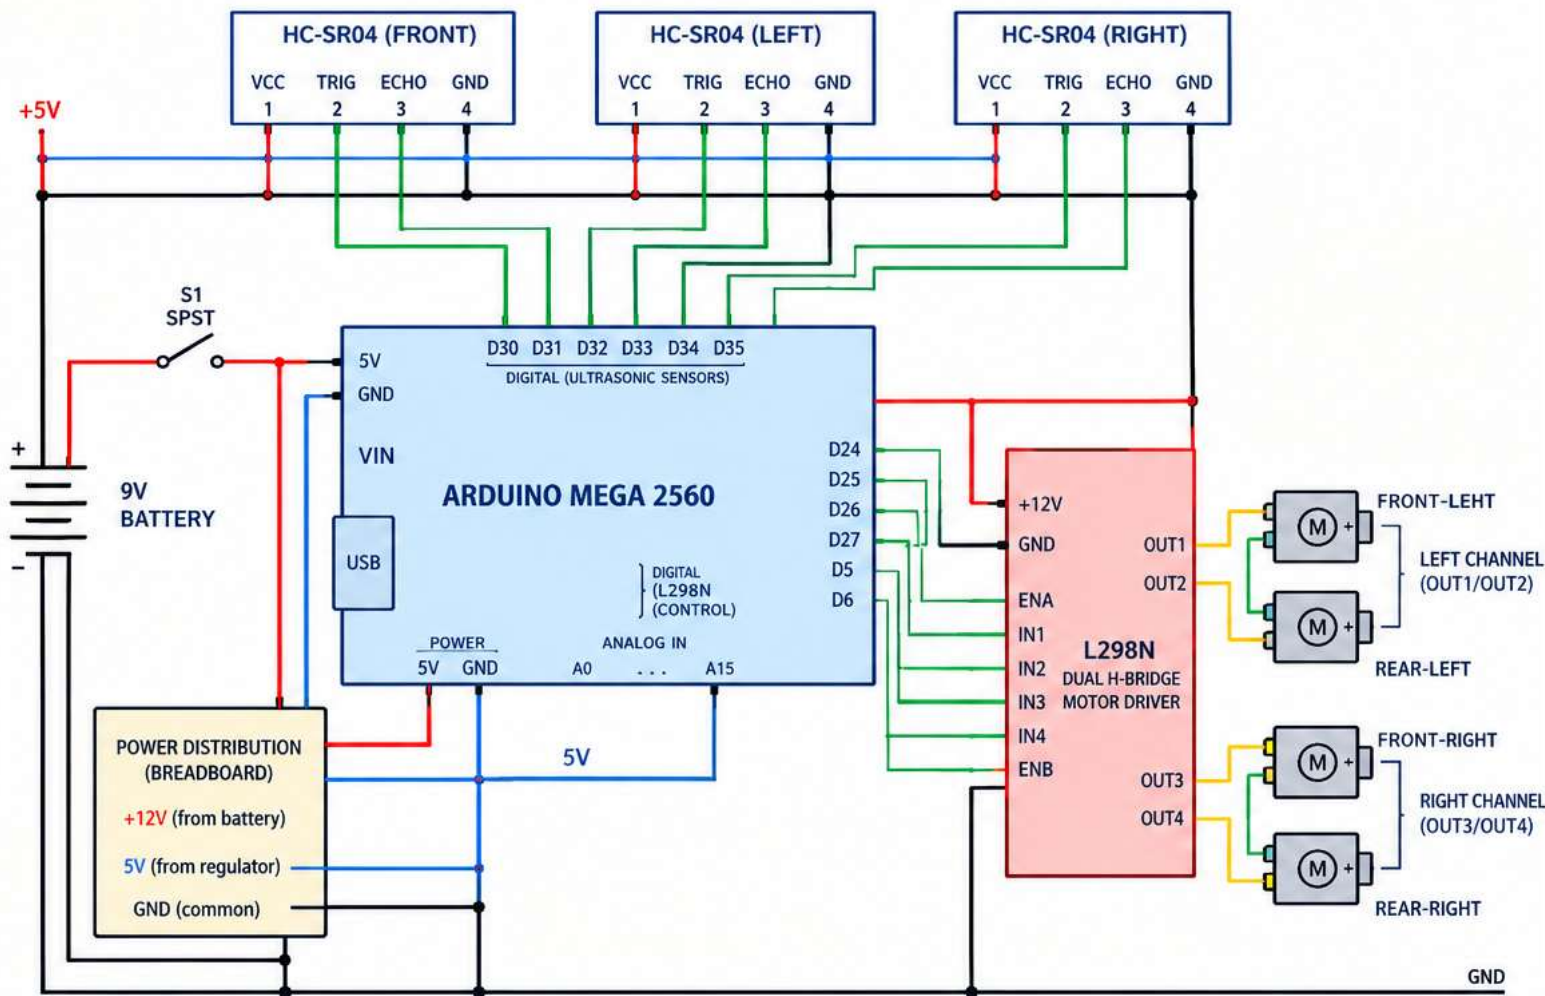

ARDUINO MEGA 2560 PIN ASSIGNMENT

FUNCTION	PIN (DIGITAL)
FRONT TRIG	D30
FRONT ECHO	D31
LEFT TRIG	D32
LEFT ECHO	D33
RIGHT TRIG	D34
RIGHT ECHO	D35
L298N IN1	D24
L298N IN2	D25
L298N IN3	D26
L298N IN4	D27
L298N ENA	D5
L298N ENB	D6

WIRE COLOURS

- = +12V (Motor Supply)
- = +5V (Logic/Sensors)
- = Signal (Trig/Echo/Control)
- = GND (Common)

NOTES:

- All grounds (Arduino, sensors, L298N, battery) must be common.
- 9V battery shown is for illustration only. A rectangular 9V battery is **NOT** ideal for four motors. Use a suitable higher-current battery pack (e.g. 7.4V–12V Li-ion or 12V battery pack) for reliable operation.

4WD ROBOT – ARDUINO MEGA + 3× HC-SR04 + L298N

DRAWING NO:	REV:	DATE:	SCALE:
4WD-001	A	2026-09-02	N.T