AME, Inc.

■ General Description

The AME8500 family allows the user to customize the CPU reset function without any external components. The user has a large choice of reset voltage thresholds, reset time intervals, and output driver configurations, all of which are preset at the factory. Each wafer is trimmed to the customer's specifications.

These circuits monitor the power supply voltage of µP based systems. When the power supply voltage drops below the voltage threshold a reset is asserted immediately (within an interval T_{D1}). The reset remains asserted after the supply voltage rises above the voltage threshold for a time interval, T_{D2}. The reset output may be either active high (RESET) or active low (RESETB). The reset output may be configured as either push/pull or open drain. The state of the reset output is guaranteed to be correct for supply voltages greater than 1V.

The AME8501 includes all the above functionality plus an overtemperature shutdown function. When the ambient temperature exceeds 80^oC a reset is asserted and remains asserted until the temperature falls below 60^oC.

Space saving SOT23 packages and micropower quiescent current (<3.0µA) make this family a natural for portable battery powered equipment.

■ Features

- Small packages: SOT-23, SOT-89
- 11 voltage threshold options
- Tight voltage threshold tolerance ---±1.50%
- 5 reset interval options
- 4 output configuration options
- Wide temperature range -------- -40^oC to 85^oC
- Low temperature coefficient --- 100ppm/$^oC_{(max)}$
- Low quiescent current < 3.0µA
- Thermal shutdown option (AME8501)

■ Applications

- Portable electronics
- Power supplies
- Computer peripherals
- Data acquisition systems
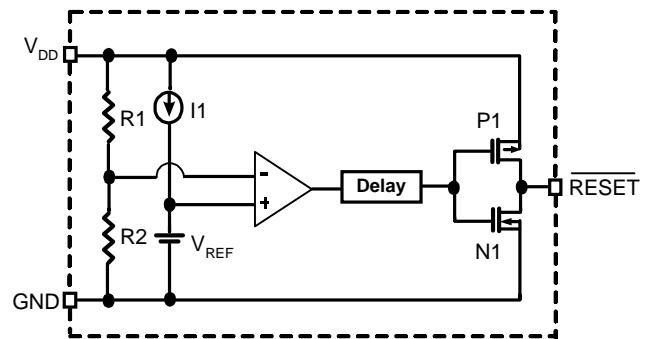- Applications using CPUs
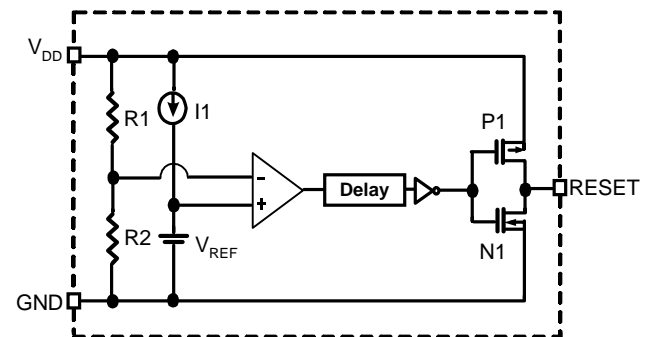- Consumer electronics

■ Typical Operating Circuit
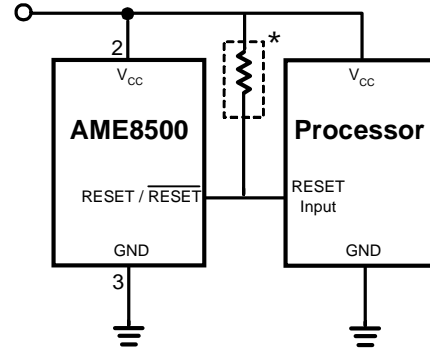
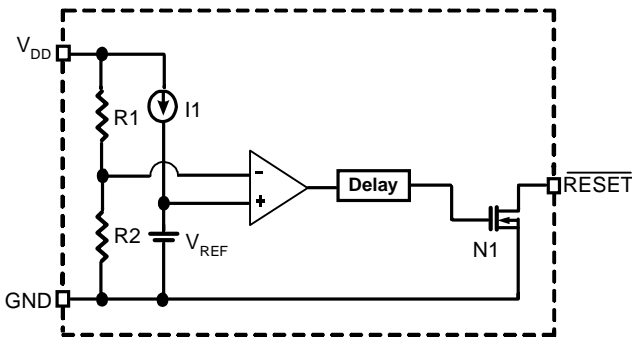Note: * External pull-up resistor is required if open-drain output is used. 10 kΩ is recommended.

■ Block Diagram
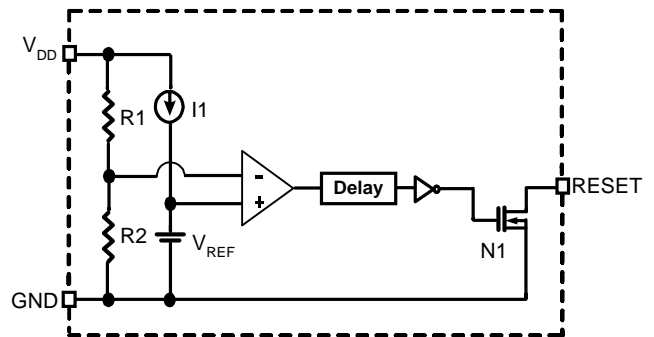
AME8500 with Push-Pull $\overline{\text{RESET}}$

AME8500 with Push-Pull RESET

1

■ Block Diagram (contd.)

AME8500 with Open-Drain $\overline{\text{RESET}}$

AME8500 with Open-Drain RESET

■ Pin Configuration

SOT-23
Top View

AME8500AEET
AME8501AEET
1. GND
2. Reset/ResetB
3. V_{DD}

SOT-23
Top View

AME8500BEET
AME8501BEET
1. Reset/ResetB
2. GND
3. V_{DD}

SOT-23
Top View

AME8500CEET
AME8501CEET
1. Reset/ResetB
2. V_{DD}
3. GND

SOT-23-L
Top View

AME8500AEET
AME8501AEET
1. GND
2. Reset/ResetB
3. V_{DD}

■ Pin Configuration (contd.)

SOT-23-L
**Top View**

3

1　　　2

AME8500BEET
AME8501BEET
1. Reset/ResetB
2. GND
3. V_{DD}

SOT-23-L
Top View

3

1　　　2

AME8500CEET
AME8501CEET
1. Reset/ResetB
2. V_{DD}
3. GND

SOT-89
Top View

1　2　3

AME8500AEFT
AME8501AEFT
1. GND
2. V_{DD}
3. Reset/ResetB

SOT-89
Top View

1　2　3

AME8500BEFT
AME8501BEFT
1. Reset/ResetB
2. V_{DD}
3. GND

SOT-89
Top View

1　2　3

AME8500CEFT
AME8501CEFT
1. V_{DD}
2. GND
3. Reset/ResetB

SOT-25
Top View

5　　　　4

1　　2　　3

AME8500BEEV
AME8501BEEV
1. Reset/ResetB
2. V_{DD}
3. GND
4. N/C
5. N/C

■ Pin Description

Pin Name	Pin Description
GND	Ground
RESETB/RESET	This pin can be ordered as RESET or RESETB.　RESET is active high. RESETB is active low.　It is also available with an open drain or pushpull output.
V_{DD}	Positive power supply.　A reset is asserted after this voltage drops below a predetermined level.　After V_{DD} rises above that level the reset output remains asserted until the end of the reset timeout period.

■ Ordering Information

```
AME8500  x  x  x  x  x  x  x  x
AME8501  x  x  x  x  x  x  x  x
```

Special Feature

VDD Threshold Voltage (V$_{TH}$)

Reset Time (T$_{D2NOM}$)

Output Driver Option

Number of Pins

Package Type

Operating Temperature Range
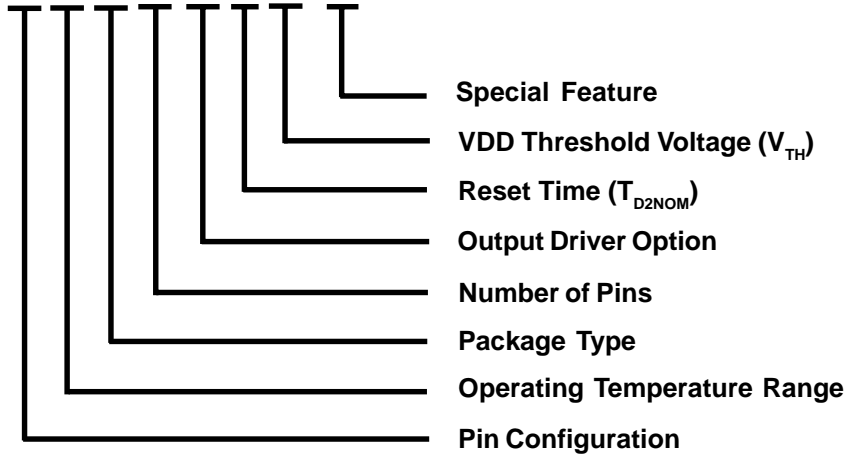
Pin Configuration

Pin Configuration	Operating Temperature Range	Package Type	Number of Pins	Output Driver Option Characteristic of RESET or RESETB pin	Reset Time (T$_{D2NOM}$)	VDD Threshold Voltage (V$_{TH}$)	Special Feature
A 1. GND (SOT-23) 2. Reset/ ResetB 3. VDD B 1. Reset/ (SOT-23) ResetB 2. GND 3. VDD C 1. Reset/ (SOT-23) ResetB 2. VDD 3. GND A 1. GND (SOT-89) 2. VDD 3. Reset/ ResetB B 1. Reset/ (SOT-89) ResetB 2. VDD 3. GND C 1. VDD (SOT-89) 2. GND 3. Reset/ ResetB	E: -40^{O}C to 85^{O}C	E: SOT-2X F: SOT-89	T: 3 V: 5	A: RESETB /PP B: RESETB /OD C: RESET/ PP D: RESET/ OD (RESET = Active High) (RESETB = Active Low) (PP = Push pull out) (OD = Open drain output polarity)	A: 1.5 ms D: 30 ms E: 150 ms F: 210 ms	15: VTH= 1.5V 16: VTH= 1.6V 18: VTH= 1.8V 19: VTH= 1.9V 20: VTH= 2.0V 21: VTH= 2.1V 22: VTH= 2.2V 23: VTH= 2.32V 24: VTH= 2.4V 26: VTH= 2.63V 27: VTH= 2.7V 28: VTH= 2.8V 29: VTH= 2.93V 31: VTH= 3.08V 40: VTH= 4.0V 42: VTH= 4.2V 44: VTH= 4.38V 46: VTH= 4.63V	L: Low profile Y: Lead free & Low profile Z: Lead free

■ Ordering Information

Part Number	Marking	V_{TH} Voltage	Package	Operating Temp. Range
AME8500AEETAA21	ASVww	2.10V	SOT-23	- 40°C to + 85°C
AME8500AEETAD20	ALXww	2.00V	SOT-23	- 40°C to + 85°C
AME8500AEETAE20	AUAww	2.00V	SOT-23	- 40°C to + 85°C
AME8500AEETAE21	AVGww	2.10V	SOT-23	- 40°C to + 85°C
AME8500AEETAE26	ASJww	2.63V	SOT-23	- 40°C to + 85°C
AME8500AEETAE26L	ASJww	2.63V	SOT-23	- 40°C to + 85°C
AME8500AEETAE29	ALYww	2.93V	SOT-23	- 40°C to + 85°C
AME8500AEETAE31	AUBww	3.08V	SOT-23	- 40°C to + 85°C
AME8500AEETAE46	ATSww	4.63V	SOT-23	- 40°C to + 85°C
AME8500AEETAF15	ATDww	1.50V	SOT-23	- 40°C to + 85°C
AME8500AEETAF16	ATEww	1.60V	SOT-23	- 40°C to + 85°C
AME8500AEETAF21	ASKww	2.10V	SOT-23	- 40°C to + 85°C
AME8500AEETAF23	ATTww	2.32V	SOT-23	- 40°C to + 85°C
AME8500AEETAF26	AMPww	2.63V	SOT-23	- 40°C to + 85°C
AME8500AEETAF27	ATRww	2.70V	SOT-23	- 40°C to + 85°C
AME8500AEETAF29	AMOww	2.93V	SOT-23	- 40°C to + 85°C
AME8500AEETAF31	ASAww	3.08V	SOT-23	- 40°C to + 85°C
AME8500AEETAF40	ASBww	4.00V	SOT-23	- 40°C to + 85°C
AME8500AEETAF44	ARNww	4.38V	SOT-23	- 40°C to + 85°C
AME8500AEETAF46	ARKww	4.63V	SOT-23	- 40°C to + 85°C
AME8500AEETBF31	AUTww	3.08V	SOT-23	- 40°C to + 85°C
AME8500AEETBF46	AUUww	4.63V	SOT-23	- 40°C to + 85°C
AME8500AEETCA21	ASWww	2.10V	SOT-23	- 40°C to + 85°C
AME8500AEETCA27	AVBww	2.70V	SOT-23	- 40°C to + 85°C
AME8500AEETCA46	AVCww	4.63V	SOT-23	- 40°C to + 85°C
AME8500AEETCD20	ALZww	2.00V	SOT-23	- 40°C to + 85°C
AME8500AEETCF21	ATYww	2.10V	SOT-23	- 40°C to + 85°C
AME8500AEETCF29	ALVww	2.93V	SOT-23	- 40°C to + 85°C
AME8500AEETCF31	ASUww	3.08V	SOT-23	- 40°C to + 85°C

■ Ordering Information (contd.)

Part Number	Marking	V_{TH} Voltage	Package	Operating Temp. Range
AME8500AEETCF46	ARJww	4.63V	SOT-23	- 40°C to + 85°C
AME8500AEETDF46	ARIww	4.63V	SOT-23	- 40°C to + 85°C
AME8500AEFTAA21	A8500A AA21ww	2.10V	SOT-89	- 40°C to + 85°C
AME8500AEFTAF27	A8500A AF27ww	2.70V	SOT-89	- 40°C to + 85°C
AME8500AEFTCA21	A8500A CA21ww	2.10V	SOT-89	- 40°C to + 85°C
AME8500AEFTDA21	A8500A DA21ww	2.10V	SOT-89	- 40°C to + 85°C
AME8500BEETAA21	ARTww	2.10V	SOT-23	- 40°C to + 85°C
AME8500BEETAA27	ARMww	2.70V	SOT-23	- 40°C to + 85°C
AME8500BEETAA28	ASRww	2.80V	SOT-23	- 40°C to + 85°C
AME8500BEETAA29	ARZww	2.93V	SOT-23	- 40°C to + 85°C
AME8500BEETAF27	AUCww	2.70V	SOT-23	- 40°C to + 85°C
AME8500BEETAF29	AUVww	2.93V	SOT-23	- 40°C to + 85°C
AME8500BEETAF31	ATOww	3.08V	SOT-23	- 40°C to + 85°C
AME8500BEETAF40	ATQww	4.00V	SOT-23	- 40°C to + 85°C
AME8500BEETBA21	AUWww	2.10V	SOT-23	- 40°C to + 85°C
AME8500BEETBA22	AVDww	2.20V	SOT-23	- 40°C to + 85°C
AME8500BEETBA24	AUXww	2.40V	SOT-23	- 40°C to + 85°C
AME8500BEETBA27	ASQww	2.70V	SOT-23	- 40°C to + 85°C
AME8500BEETBA28	ASSww	2.80V	SOT-23	- 40°C to + 85°C
AME8500BEETBA28L	ASSww	2.80V	SOT-23	- 40°C to + 85°C
AME8500BEETBA28Y	ASSww	2.80V	SOT-23	- 40°C to + 85°C
AME8500BEETBA29	ARLww	2.93V	SOT-23	- 40°C to + 85°C

■ Ordering Information (contd.)

Part Number	Marking	V_{TH} Voltage	Package	Operating Temp. Range
AME8500BEETBA42	ASIww	4.20V	SOT-23	- 40°C to + 85°C
AME8500BEETCA21	ASXww	2.10V	SOT-23	- 40°C to + 85°C
AME8500BEEVAK27	AUFww	2.70V	SOT-25	- 40°C to + 85°C
AME8500BEFTAA21	A8500B AA21ww	2.10V	SOT-89	- 40°C to + 85°C
AME8500BEFTAA27	A8500B AA27ww	2.70V	SOT-89	- 40°C to + 85°C
AME8500BEFTAF27	A8500B AF27ww	2.70V	SOT-89	- 40°C to + 85°C
AME8500BEFTAF40	A8500B AF40ww	4.00V	SOT-89	- 40°C to + 85°C
AME8500BEFTBA23	A8500B BA23ww	2.32V	SOT-89	- 40°C to + 85°C
AME8500CEETAA21	ASYww	2.10V	SOT-23	- 40°C to + 85°C
AME8500CEETAE26	ASHww	2.63V	SOT-23	- 40°C to + 85°C
AME8500CEETAE42	AUZww	4.20V	SOT-23	- 40°C to + 85°C
AME8500CEETAF29	ASLww	2.93V	SOT-23	- 40°C to + 85°C
AME8500CEETBE42	AVAww	4.20V	SOT-23	- 40°C to + 85°C
AME8500CEETBF31	AVYww	3.08V	SOT-23	- 40°C to + 85°C
AME8500CEETBF46	ARWww	4.63V	SOT-23	- 40°C to + 85°C
AME8500CEETCA21	ASZww	2.10V	SOT-23	- 40°C to + 85°C
AME8500CEFTBA27	A8500C BA27ww	2.70V	SOT-89	- 40°C to + 85°C
AME8500CEFTBA29	A8500C BA29ww	2.93V	SOT-89	- 40°C to + 85°C
AME8500CEFTBA42	A8500C BA42ww	4.20V	SOT-89	- 40°C to + 85°C
AME8500CEFTCD28	A8500C CD28ww	2.80V	SOT-89	- 40°C to + 85°C
AME8500CEFTCD46	A8500C CD46ww	4.63V	SOT-89	- 40°C to + 85°C

Please consult AME sales office or authorized Rep./Distributor for other voltage options.

■ Absolute Maximum Ratings

Parameter	Maximum	Unit
Supply Voltage	7	V
ESD Classification	B	
Input Current, V_{DD}	20	mA
Output Current, RESET, ResetB	20	mA
Rate of Rise, V_{DD}	100	V/µs

Caution: Stress above the listed absolute maximum rating may cause permanent damage to the device

■ Recommended Operating Conditions

Parameter	Rating	Unit
Supply Voltage	1.6 - 5	V
Ambient Temperature Range	- 40 to + 85	ºC
Junction Temperature	- 40 to + 125	ºC
Storage Temperature	- 65 to 150	ºC

■ Thermal Information

Parameter		Maximum	Unit
Thermal Resistance	SOT-23	325	ºC / W
	SOT-89	180	
Power Dissipation	SOT-23	350	mW
	SOT-89	650	
Maximum Junction Temperature		150	ºC
Maximum Lead Temperature (10 Sec)		300	ºC

■ Electrical Specifications

TA = 25°C unless otherwise noted

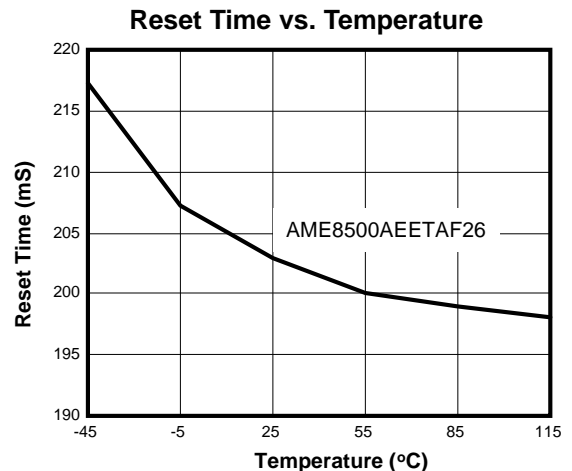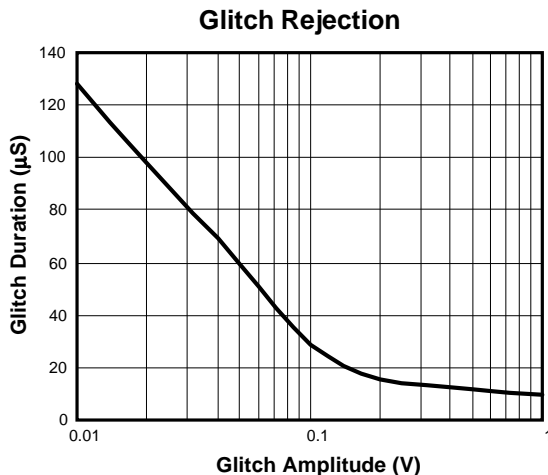| Parameter	Symbol	Test Condition		Min	Typ	Max	Units
V_{DD} Range*	V_{RANGE}			1		5.5	V
		TA=-40~85°C		1		5.5	
Supply Current	I_{DD}	$V_{DD} = V_{TH}$*1.10				3.0	μA
		$V_{DD} = V_{TH}$*1.10, TA=-40~85°C				5.0	
Reset Threshold	V_{TH}			V_{THNOM} - 1.5%		V_{THNOM} + 1.5%	mV
		TA=-40~85°C		V_{THNOM} - 2.0%		V_{THNOM} + 2.0%	
Hysteresis Range	V_{HYST}	$V_{RELEASE}$ - V_{TH}, note1			20		mV
RESET Threshold Tempco					30		ppm
RESETB Output Voltage Low	V_{OL}	$V_{DD}<V_{TH (MIN)}$	I_{SINK}=1.2mA, TA= -40~85°C			0.5	V
RESET Output Voltage Low		$V_{DD}>V_{TH (MAX)}$					
RESETB Output Voltage High	V_{OH}	$V_{DD}>V_{TH (MAX)}$	I_{SOURCE}=0.5mA, V_{DD}>1.8V	$0.8V_{DD}$			V
			I_{SOURCE}=0.15mA, 1.8V>=V_{DD}>1.0V				
RESET Output Voltage High		$V_{DD}<V_{TH (MIN)}$	I_{SOURCE}=0.5mA, V_{DD}>1.8V				
			I_{SOURCE}=0.15mA, 1.8V>=V_{DD}>1.0V				
V_{DD} to Reset Delay	T_{D1}	$V_{DD}= V_{TH}$ - 100mV, TA= -40 ~ 85°C			40	200	μS
Reset Timeout Period*	T_{D2}	TA= -40 ~ 85°C	Version A	0.5	1.5	5	mS
			Version D	15	30	50	mS
			Version E	80	150	230	mS
			Version F	140	210	500	mS
			Version K	300	440	600	mS
Temperature Shutdown	T_{OFF}	AME8501 only			80		°C
Temperature Shutdown Hysteresis	T_{HYS}	AME8501 only			20		°C

Note1:The data based on V_{TH}=2.7V part type.
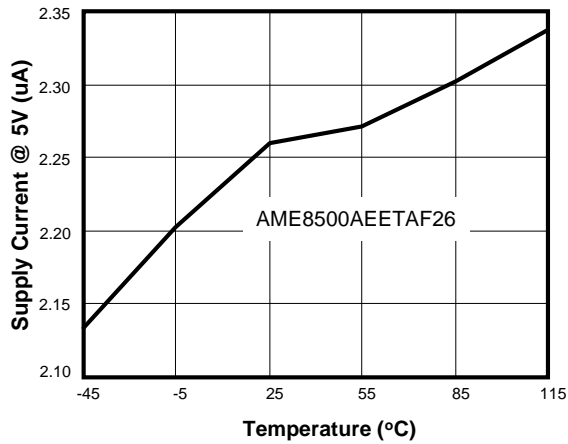
■ Timing Diagram
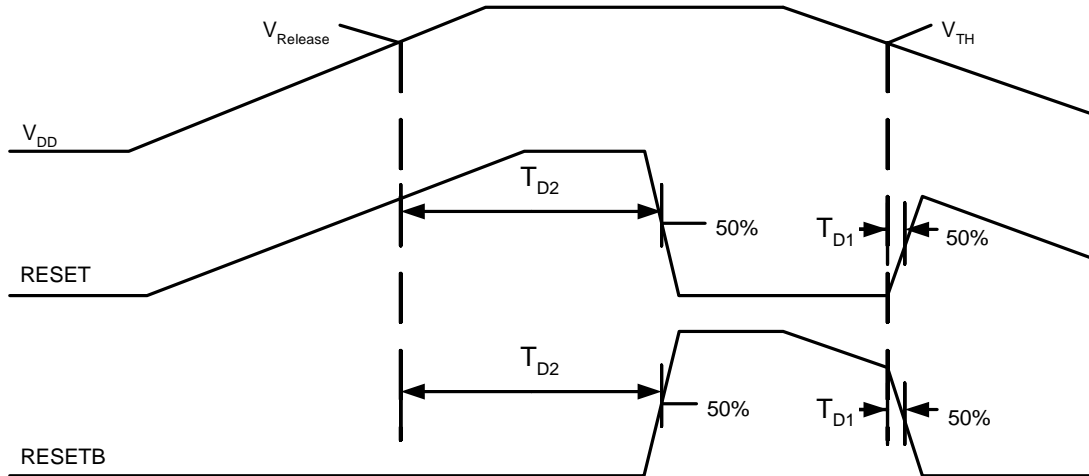
■ Applications Information

Supply Transients

These devices have a certain immunity to fast negative going transients. In the following pages the graph titled "Glitch Rejection" indicates the maximum allowable glitch amplitude and duration to avoid triggering an unintended reset. As shown in the graph shorter transients can have larger amplitudes without triggering resets.
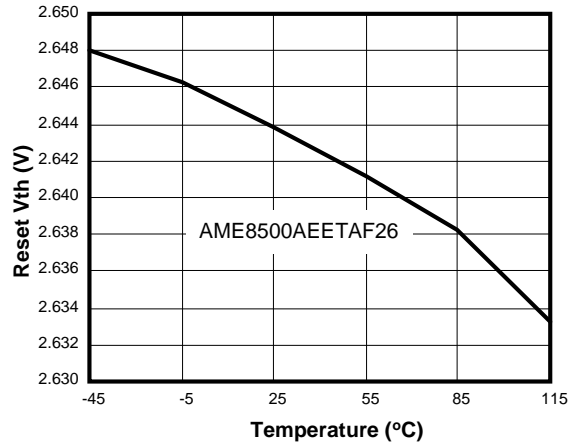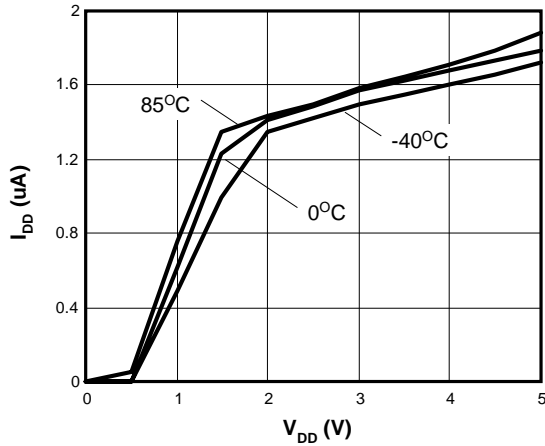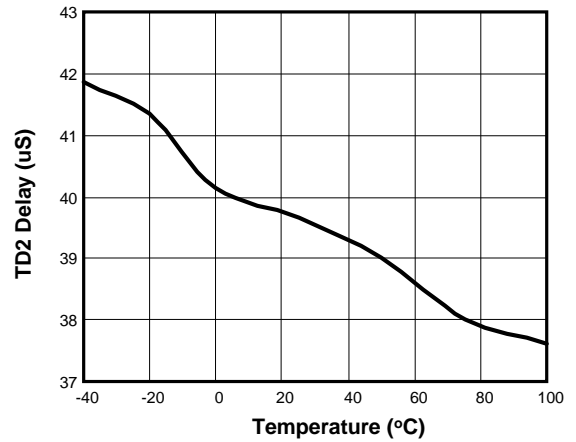
Glitch Rejection

Reset Time vs. Temperature

I_{DD} vs. Temperature

AME8500AEETAF26

Supply Current @ 5V (uA) / Temperature (°C)

Reset V_{TH} vs. Temperature

AME8500AEETAF26

Reset Vth (V) / Temperature (°C)

I_{DD} vs. V_{DD}

85°C

-40°C

0°C

I_{DD} (uA) / V_{DD} (V)

T_{D1} Delay vs. Temperature

TD2 Delay (uS) / Temperature (°C)

Threshold Hysteresis vs. Temperature

Hysteresis (% of V_{TH}) / Temperature (°C)
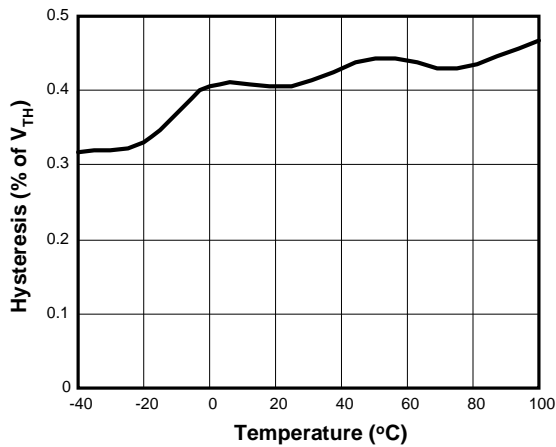
Reset VOL vs. Temperature

AME8500AEETAF26

Reset VOL @ 0.8mA (V) / Temperature (°C)

■ Package Dimension

SOT-23

Top View

Side View

Front View
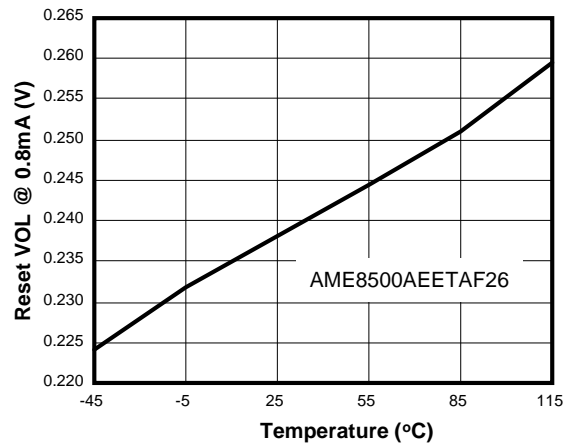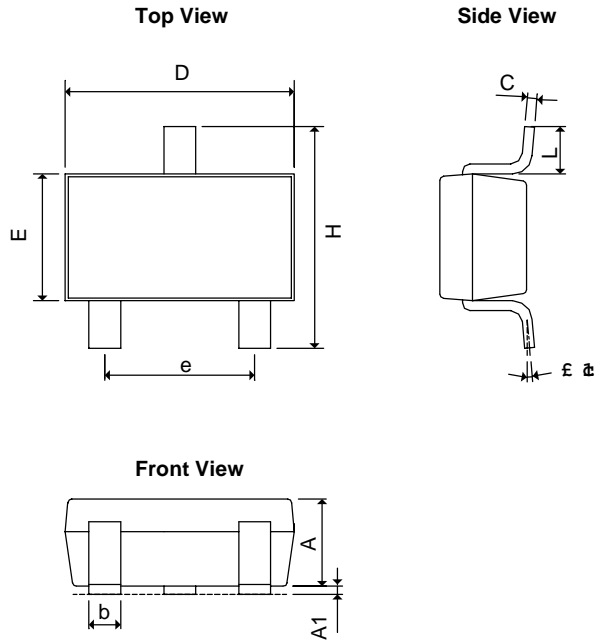
SYMBOLS	MILLIMETERS		INCHES	
	MIN	**MAX**	**MIN**	**MAX**
A	1.00	1.40	0.0394	0.0551
A$_1$	0.00	0.15	0.0000	0.0059
b	0.35	0.50	0.0138	0.0197
C	0.09	0.25	0.0035	0.0098
D	2.70	3.10	0.1063	0.1220
E	1.40	1.80	0.0551	0.0709
e	1.90 BSC		0.0748 BSC	
H	2.40	3.00	0.09449	0.11811
L	0.35BSC		0.0138BSC	
θ1	0^o	10^o	0^o	10^o

SOT-23-L

Top View

Side View

Front View
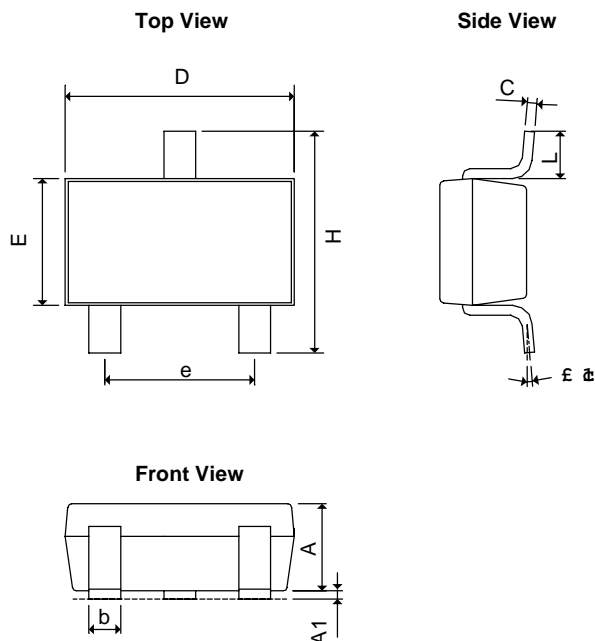
SYMBOLS	MILLIMETERS		INCHES	
	MIN	**MAX**	**MIN**	**MAX**
A+A$_1$	1.00	1.30	0.0394	0.0512
b	0.35	0.50	0.0138	0.0197
C	0.09	0.25	0.0035	0.0098
D	2.70	3.10	0.1063	0.1220
E	1.40	1.80	0.0551	0.0709
e	1.90 BSC		0.0748 BSC	
H	2.40	3.00	0.09449	0.11811
L	0.35BSC		0.0138BSC	
θ1	0^o	10^o	0^o	10^o

■ Package Dimension

SOT-89

Top View

Side View

Front View
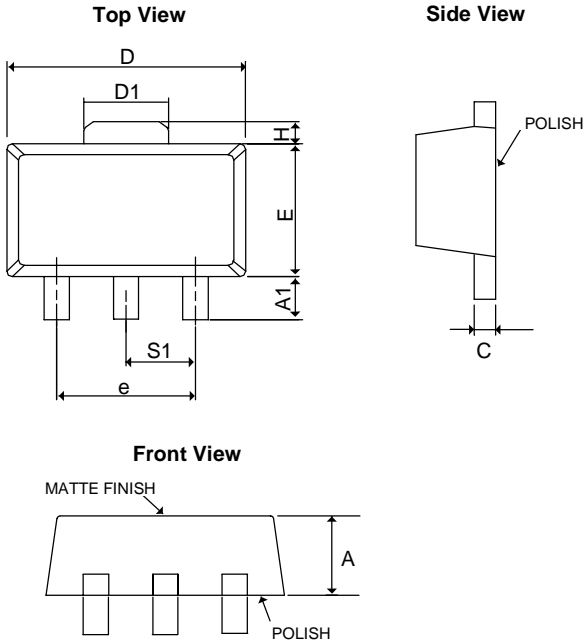
SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.39	1.60	0.05472	0.06299
A$_1$	0.8REF		0.0315REF	
C	0.35	0.44	0.01378	0.01732
D	4.39	4.60	0.17283	0.1811
D$_1$	1.35	1.83	0.05315	0.07205
E	2.28	3.60	0.08976	0.14173
e	3.00REF		0.1181REF	
H	0.70REF		0.0276REF	
S1	1.50REF		0.0590REF	

SOT-25

Top View

Side View

Front View
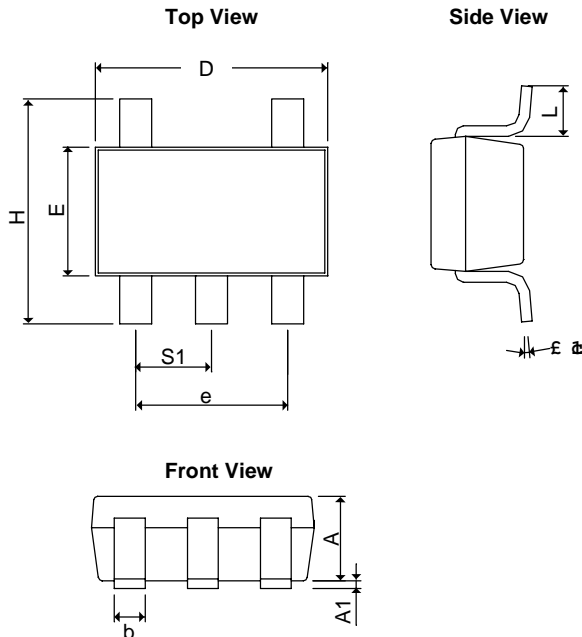
SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.20REF		0.0472REF	
A$_1$	0.00	0.15	0.0000	0.0059
b	0.30	0.55	0.0118	0.0217
D	2.70	3.10	0.1063	0.1220
E	1.40	1.80	0.0551	0.0709
e	1.90 BSC		0.07480 BSC	
H	2.60	3.00	0.10236	0.11811
L	0.37BSC		0.0146BSC	
θ1	0^o	10^o	0^o	10^o
S$_1$	0.95BSC		0.0374BSC	

www.ame.com.tw
E-Mail: sales@ame.com.tw