


EMAG Driver



Motor Driver

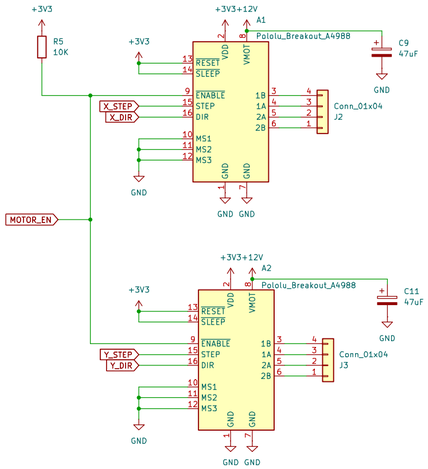


ESP32-S3

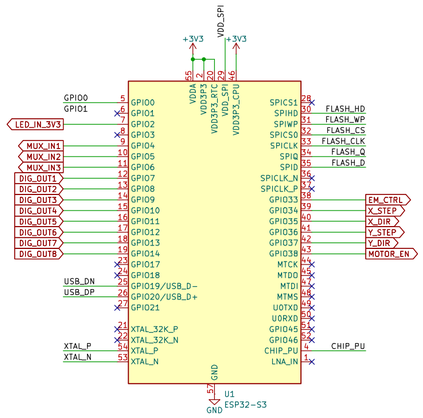


U1 DECOUPLING


C1+C2: VDD3P3 (2/3) C3: VDDA (55/56) C4: VDD3P3_RTC (20) C5: VDD3P3_CPU (46)




BOOT (GPIO0)




RESET (CHIP_PU)




40 MHz CRYSTAL




12-5V Buck

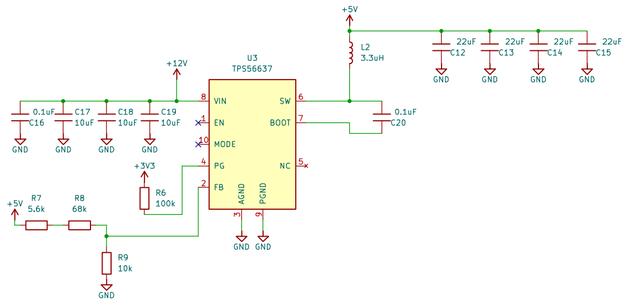


12-3.3V Buck

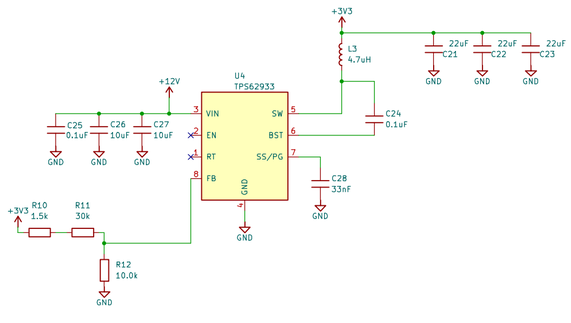


12V Supply




LED Data Level Shifter



Ribbon Connection TO SENSOR PCB



USB-B TO PI 5



VDD_SPI + SPI FLASH (W25Q128JVS, 16 MB)

