




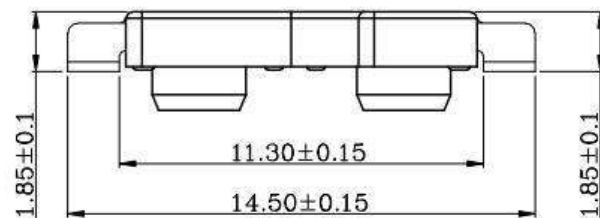
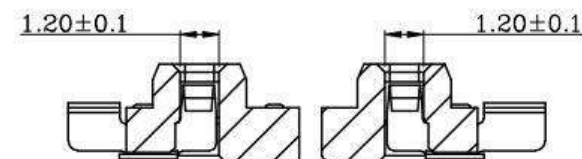
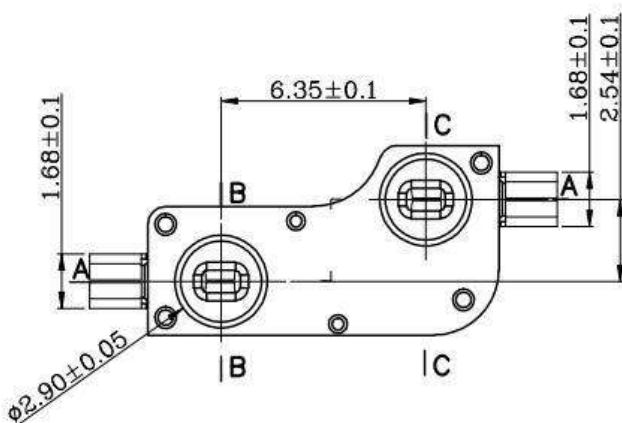



ABIDE BY ROHS

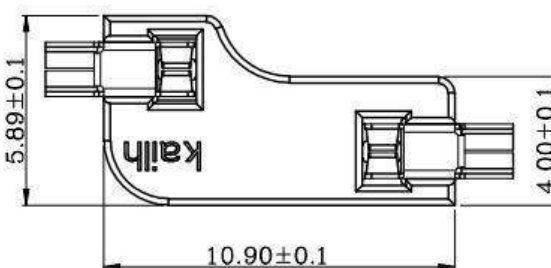

SECTION B-B



SECTION A-A

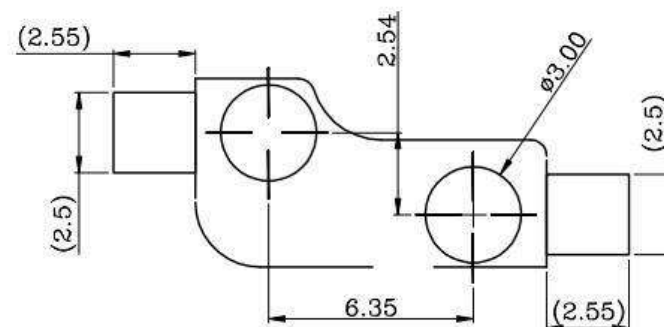

■ Specification :

●1.Rating:

Voltage :12V AC/DC max.,2V DC min.

Current: 10mA AC/DC max.,10μA DC min.

●2.Contact Resistance : 100mΩ Max

●3.Insulation Resistance :100MΩ at 500V

●4.Withstand Voltage :AC100V(50-60Hz) for 1 minute

●5.Mating Force :3.0kgf max

●6.Operating Life :100 Cycles

●7. Electroplate an examination request

①Plate 1 F specification:the contact noodles GOLD 1 U"above:The Han feet plate fog tin 80 U" is above:The 50 U" that is whole to plate Ni"above.

②External appearance:

(1)Can not have been already transformed, bubble, stain, change countenance etc..

(2)The packing can not be damaged, the label exactitude, amount is without any error.

③Believe a patience request:

(1)90 ° folds curved two or blunt press solid to check can not have already plated a 1 F peeling off phenomenon.

(2)Salt fog tests surface to don't more than 5% decay area for 12 hours.

(3)Directly be stained with tin 260 °C [3 ses, be stained with tin area to attain above 95%.

②	contact	2	Copper Alloy	plating gold	
①	Base	1	Nylon	Black	
ITEM	PART NAME	QUANTITY	MATERIAL	FINISHING	REMARK