

FOBOS: THE FIBER-OPTIC BENCH OPTICAL SPECTROGRAPH

Keck's next-generation spectroscopic facility

Executive Summary

The 2016 Keck Observatory Scientific Strategic Plan lists highly-multiplexed spectroscopy as a key desirable that would position Keck to take advantage of the coming era of wide-field imaging facilities like LSST, Euclid, and WFIRST. FOBOS¹ addresses this priority via a fiber-based facility that optimizes depth over area, preserving Keck's historical strength in faint-object spectroscopy. The result is a uniquely blue-sensitive, high-multiplex instrument with order-of-magnitude greater sampling density than competitors like Subaru's Prime Focus Spectrograph (PFS). In the LSST era, FOBOS will excel at building the deep, spectroscopic reference data sets needed to interpret vast imaging data. At the same time, its flexible focal plane, including deployable integral field units (IFUs), enables an expansive range of scientific investigations from the diverse Keck community.

FOBOS will provide $R \sim 3500$ spectroscopy over an instantaneous bandpass of 310-1000 nm for as many as 1800 individual targets across a 17 arcminute diameter field. The instrument is modular and composed of three major components. The focal plane system includes an atmospheric dispersion corrector (ADC) whose final lens traces the Nasmyth focal surface. This enables flexible target allocation by free-roaming Starbug positioners that “walk” on this surface. When configured in single-fiber mode, each Starbug carries a 150 μm core diameter fiber with demagnifying fore-optics that samples a 0.9 arcsec diameter aperture on-sky. If FOBOS is configured in IFU mode, a different suite of Starbugs would be deployed on the focal plane. These would carry IFU fiber bundles with coupled lenslet arrays that provide finer spatial sampling. A short fiber run (<10 m) through a stress-relief cabling system minimizes throughput losses between the focal plane and an array of three temperature-controlled bench spectrographs mounted on the Nasmyth platform adjacent to the focal plane system.

Its UV sensitivity, high multiplex and sampling density, and aperture flexibility make FOBOS compelling in science areas that are traditional strengths of the Keck Community. These include Local Group archeology studies via resolved stellar spectra at moderate spectral resolution in dwarf galaxies, M31, and the Milky Way halo. At greater distances, FOBOS will probe ultra-diffuse galaxies and globular cluster populations in galaxy clusters like Coma. The depth and high sampling density FOBOS provides will open new probes of galaxy clusters and galaxy environment at $z \sim 1$, while its IFU mode will enable kinematic studies of winds, the resolved gas-phase properties and dynamics of star-forming galaxies, and the internal structure of stellar populations for large samples of distant galaxies. FOBOS's capacity for detailed tomographic Ly- α and UV absorption line measurements of galaxies and the intergalactic medium at $z \sim 2-4$ will be unparalleled. Cosmological analyses using panoramic deep imaging (e.g., LSST) will greatly benefit from photo- z training by FOBOS, which is ideally suited to required photo- z programs. With a dedicated, fixed IFU always ready, FOBOS can rapidly follow up transient sources while continuing to collect valuable photons on background targets. Its flexible focal plane allows efficient observing strategies that combine multiple programs and can dynamically respond to changing conditions.

1. SCIENCE GOALS AND MOTIVATION

1.1. Unraveling the Formation History of our Local Group of Galaxies. Our Local Group of galaxies—the Milky Way (MW), the Magellanic Clouds, Andromeda (M31) and Triangulum (M33) Galaxies, and a multitude of satellite galaxies—allows us to study one realization of the galaxy formation process in superb detail. In the next decade, LSST and WFIRST will increase the census of stellar streams and halo substructure in these galaxies by

¹FOBOS: Fiber-Optic Broadband Optical Spectrograph

a hundredfold. Follow-up *stellar* spectroscopy will constrain stream orbits and the total mass they enclose (Sanderson et al., 2017) as well as the associated age and chemical composition (see below).

Dwarf galaxies

M31

Milkway halo

1.2. A Comprehensive Picture of the Proto-galaxy Ecosystem. IGM tomography: Understand the $z \sim 2$ galaxy “ecosystem,” including not only the galaxies themselves but their gas-filled environments. The goal is to build a comprehensive picture of the physical processes that fuel proto-galaxy growth, shape their internal structure, and influence their environment.

[[Cooper?]] Build SDSS-like statistics for galaxies at this key cosmic epoch. Exploit short spectroscopic exposures in combination with photometry to provide environmental diagnostics for 1M galaxies at $z=1-2$. Photometric redshifts, while acceptable in large cosmological analyses, wash out information about the local position of galaxies with respect to one another. To characterize a galaxy’s local environment and identify its neighbors requires (observationally expensive) spectroscopic redshifts. However, with improved photo- z s available from Challenge 1 and strong priors on spectral types (Challenge ??), the challenge here is to push machine-learning techniques to deliver *spectroscopic* redshifts (with 300 km s^{-1} accuracy) at the lowest signal-to-noise possible. Reductions by factors of 4–5 in exposure time would enable FOBOS to complete a 1M galaxy environment survey at $z = 1-2$ in just 20-30 nights.

[[Siana – Clusters]]

[[Westfall/Bundy – Resolved spectroscopy]]

1.3. Enhancing Dark Energy Probes via Precision Cosmic Distances. The 2011 Nobel Prize in Physics was awarded for the discovery that the expansion of the universe is accelerating due to the mysterious “dark energy,” the origin of which remains unknown. Dark energy is one of the most fundamental, unsolved problems in both cosmology and particle physics. It has inspired enormous world-wide efforts — culminating in LSST, Euclid, and WFIRST — that seek highly precise measures of cosmic structure to constrain the evolving dark-energy equation-of-state.

These measures utilize angular correlations of galaxy positions, their gravitational lensing shear, and the cross-correlation between the two. Unfortunately, photometric distances (via photometric redshifts, or “photo- z s”) are significantly less precise than spectroscopic redshifts (spec- z s), introducing significant biases. The spectroscopic validation of photo- z s we propose with FOBOS is therefore critical to the success of *all* imaging surveys in this respect. It would not only *increase the dark energy figure-of-merit in LSST by 40%* (Newman et al., 2015) but, importantly, provide vital confidence in cosmological results. FOBOS is particularly powerful in this application because it has no “redshift desert” thanks to its unique ability to measure spectroscopic redshifts above $z > 1.5$ via rest-frame UV features. This eliminates the need for expensive, space-based² near-IR spectroscopy.

Data-Science Challenge 1: Enable high-precision LSST photometric redshifts with strategically designed training spectroscopy: FOBOS is ideally suited to obtaining large ($> 10,000$ galaxies) and deep spectroscopic training sets required for LSST, WFIRST, and Euclid (see Newman et al., 2015). Applying machine-learning, template-based, and hybrid photo- z estimators to simulated data, we will build a methodology for designing FOBOS training sets

²Ground-based near-IR spectroscopy is too contaminated by sky-line emission to provide spec- z s at the required level of completeness (Newman et al., 2015).

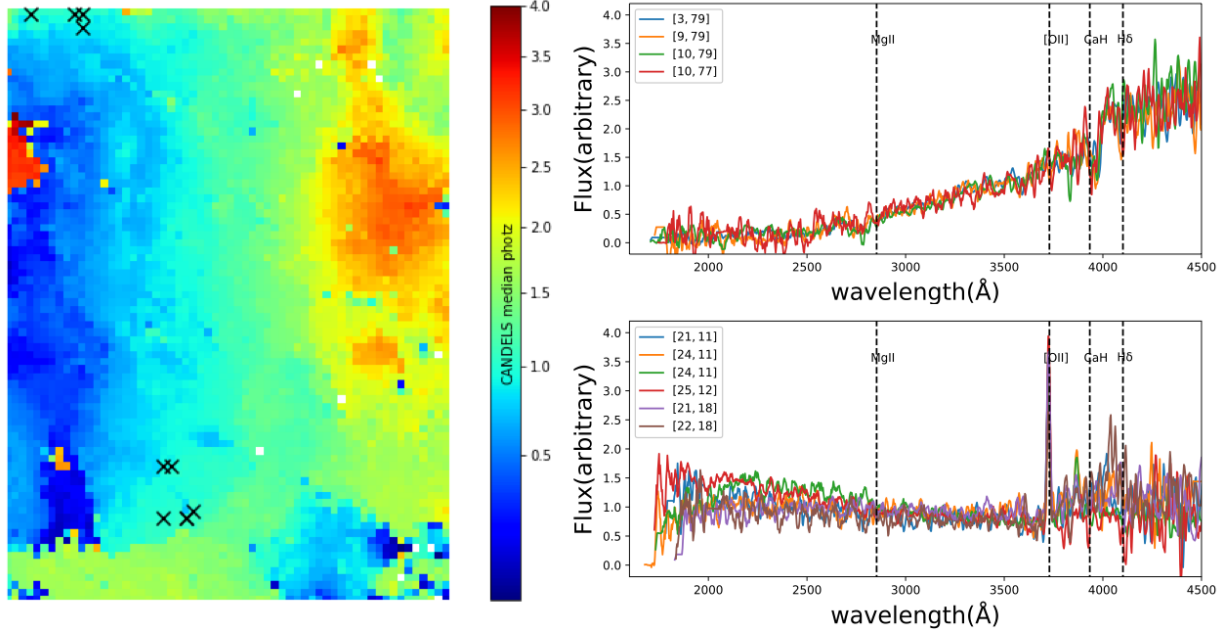


FIGURE 1. *Left:* A Self-Organizing Map (SOM; Kohonen, 1990) from Hemmati et al. (2018) encoding the relation between colors in an LSST+WFIRST-like color space and redshift, z . Position in the SOM is associated with a position in the multi-dimensional broad-band color space of galaxies. Galaxies observed in this space are assigned z values based on the median photo- z of galaxies from the CANDELS survey (color bar; Grogin et al., 2011). Such SOMs can be used to optimally define spectroscopic training samples for use with imaging surveys. *Right:* Galaxy spectra from VVDS (Le Fèvre et al., 2005); black crosses near the top and bottom of the SOM are plotted in the top and bottom panels, respectively. Note the similarity of the high-resolution spectra associated within the SOM, suggesting that a systematic spectroscopic exploration of the LSST color space would have far-reaching benefits to the science return of the mission beyond the photo- z application.


that minimize observing time while maintaining adequate parameter-space sampling.³ Self-Organizing Maps (SOM, Fig. 1) provide a state-of-the-art representation of a high-dimensional input space in projected 2D grid cells, allowing us to benchmark sampling of the photometric color space under various training set designs. We will use Bayesian Optimization techniques to evaluate the success of simulated training sets against the fidelity of full cosmological analyses that employ them. This will enable extremely rapid exploration of the optimal design space.

1.3.1. FOBOS

as an ideal spectroscopic training instrument.

1.4. Addressing Data Science Challenges and Designing FOBOS Training Sets.

Our team includes leading experts on data science applications to astronomy and, specifically, LSST. We will also use our established connections to LSST’s Informatics and Statistics Science Collaboration (ISSC) to advertise, recruit, and coordinate efforts to

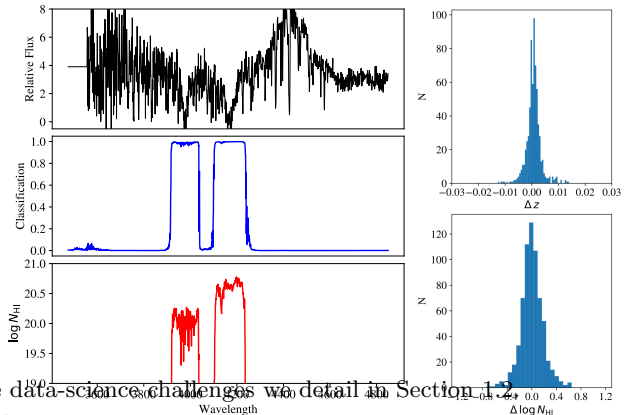

³Of course, the design of this sample also benefits the data science challenges we detail in Section 1.2.

FIGURE 2. Application of machine learning to find and quantify the physical parameters of absorption by neutral hydrogen gas in spectra taken along quasar sight lines (adapted from Figs 7 and 14 from Parks et al. 2018). Two absorption systems

tackle the Data Science Challenges described in Section 1. Our proposal request includes two community workshops to motivate progress and discuss results. At the end of the proposal period, we will publish the results and developed software packages.

Our data-science challenges require work on simulated imaging+spectroscopic data sets where input physical properties (e.g., redshift) can be compared to output recovered values. Simulated imaging data (e.g., from LSST and WFIRST) are in-hand, while mock spectroscopy will be provided by a FOBOS instrument simulator, an initial version of which has already been developed. Further advances to be supported by this proposal include improved error modeling and simulating systematic effects from detector artifacts, image quality aberrations informed by the emerging detailed optical design, and variable observing conditions.

The resulting success in addressing each data-science challenge will define a level of readiness and set requirements on desired FOBOS training sets, including number of sources, pointings, magnitude limits, signal-to-noise thresholds, and observing conditions. Preliminary observing design and a description of required operational modes to efficiently observe these training sets will begin with this proposal. Operational modes will set requirements on target aggregation and prioritization systems, field acquisition speed, field rotation range, zenith avoidance zone, reconfiguration time, calibrations, read-out time, quick-look reduction software and processing rates. We will develop integrated program concepts that efficiently combine required observations. Detailed survey and execution plans will be completed in the next phase of this project (MSRI-2). Roughly 20% of Keck observing time is open to the public, and as in previous federally-funded projects, we fully expect that Senior Personnel at Keck institutions will be successful in collaborative efforts to secure significant amounts of additional telescope observing time to enable rapid, public release of FOBOS training data (e.g., Newman et al., 2013).

2. FOBOS INSTRUMENT DESCRIPTION

Mounted at the Nasmyth focus of Keck II Telescope at WMKO, FOBOS (Fig 3) will be one of the most powerful spectroscopic facilities deployed in the next decade. FOBOS includes a compensating lateral atmospheric dispersion corrector (CLADC, not pictured) to ensure that target light from all wavelengths falls on allocated fibers while also correcting image aberrations at the edges of the 20 arcmin diameter Keck field. Each of the CLADC lenses is 946 mm in diameter, the first two closely spaced with lateral relative motions enabled by three barrel-mounted actuators. The final CLADC lens surface serves as the vertical mounting plate for roaming Starbugs fiber positioners. It translates to track focal plane tilt. Starbugs patrol a large on-sky area (~ 1 arcmin), enabling flexible and dynamic targeting configurations with adjacent fibers as close as 10 arcsec.

A total of 1800 150- μm core diameter fibers are deployed at the curved focal plane. Fore-optics on the front end of each fiber demagnify and speed up the beam (from $f/15$ to $f/5$) for better

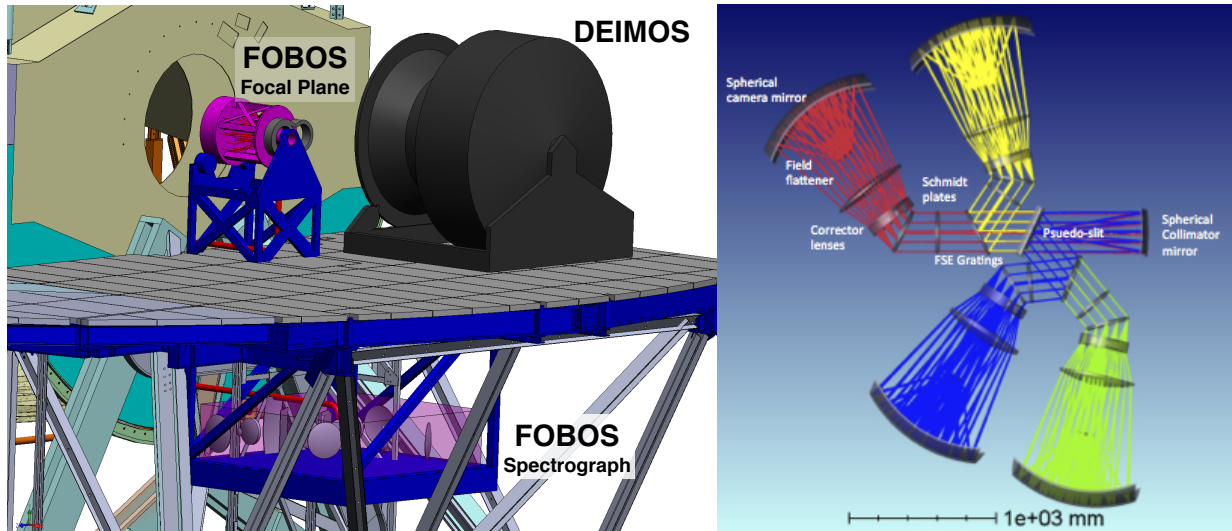


FIGURE 3. *Left:* Rendering of FOBOS instrument systems deployed at the Keck II Nasmyth port. By mounting the FOBOS spectrographs under the Nasmyth platform, other instruments like DEIMOS can maintain access to the telescope. *Right:* Rendering of one of the three four-armed FOBOS spectrographs.

coupling to the fiber numerical aperture and to minimize losses from focal ratio degradation. The focal plane plate rotates and translates to follow image positions as the telescope tracks across the sky. The fiber run is kept at less than 10m to maintain high throughput at UV wavelengths. Special care is given to stress-relief cabling to minimize variable focal ratio degradation over the fiber run.

Sets of 600 fibers feed each of three identical spectrographs (Fig 3). Each spectrograph uses a series of dichroics to divide the 259 mm diameter collimated beam into four wavelength channels with combined, instantaneous coverage from 0.31–1 μm . Fused-silica etched (FSE) gratings provide mid-channel spectral resolutions of $R \sim 3500$ at high diffraction efficiency in each channel. The dispersed light is focused by an f/1.1 catadioptric camera⁴ and recorded by an on-axis 4k \times 4k CCD mounted at the center of the first camera lens element. Spectrographs are mounted in a temperature controlled housing installed under the Nasmyth Deck to allow space for other Keck instruments above. The end-to-end instrument throughput peaks at 60% and is greater than 30% at all wavelengths

FOBOS includes observatory level systems for precise instrument calibration using dome-interior screen illumination, a metrology system for accurate fiber positioning, and guide cameras for field acquisition and guiding. The instrument design envisions future upgrades including alternate collecting modes that deploy multiple fiber bundles, feeds to other fiber-based spectrographs at different wavelengths or spectral resolutions, and the ability to support and benefit from image corrections with Ground-Layer Adaptive Optics.

3. PROPOSED WORK

FOBOS will complete its current conceptual design phase in fall 2019. Funding from this proposal will support the next phase of Preliminary Design. A schedule of milestones and additional information is provided in the Project Execution Plan (PEP). Major components of the Preliminary Design effort are described below.

⁴Based on the camera design for the Multi-Object Optical and Near-infrared Spectrograph (MOONS) on the Very Large Telescope (VLT).

Atmospheric Dispersion Compensator (ADC): The opto-mechanical design, tolerancing, lens cell design, motion systems, and software-control design of the ADC will be completed.

Focal Plane System: Mechanical design, including flexure analysis and the selection of drive mechanisms and potential vendors will be completed. This system also defines one of the interfaces to the Keck II Telescope and must comply with WMKO space envelopes, servicing needs, and other requirements. The focal plane system also includes the guide cameras.

Starbugs fiber positioners: Starbugs are a positioning technology developed and deployed by the Australian Astronomical Observatory (AAO), which has partnered with our team to generate a conceptual design for use of Starbugs by FOBOS. Design requirements for Starbugs in FOBOS are more relaxed than the currently on-sky TAIPAN instrument thanks to the larger physical plate scale at Keck.

Fiber System: We will complete the optical design and processing plan for affixing forward optics lenses to each fiber head. A micro-lens array solution will be developed for a central, fixed-position 4.5-arcsec diameter IFU for fast source acquisition. This work package also includes the stress-relief cable system and fiber termination hardware and processing.

Spectrographs. The optical systems and components (slit, collimator, dichroics, gratings, and camera), an analysis of acceptable tolerances and performance, their mechanical supports, software controls, and the overall enclosure will all be advanced through Preliminary Design. Detectors, cryostats, read-out electronics and systems for thermal management will be designed.

3.1. MAISTRO: Target Allocation with Artificial Intelligence. Powered by Starbugs fiber positioners, FOBOS will enable fast, dynamic reallocation of fibers. To efficiently determine the best options given a wide range of possible targets and desired observing outcomes, we will develop a preliminary design for MAISTRO,⁵ an “artificial intelligence” (AI) targeting system that will learn optimization strategies for assigning targets from a database of overlapping observing programs with pre-defined priorities. The AI package will aggregate data quality using a quick-look reduction package, science-driven performance metrics, *and real-time assessments of the observing conditions* to make dynamic targeting recommendations. For example, if conditions are slightly less than optimal, MAISTRO would reconfigure Starbugs to brighter objects in a field or implement a different program prioritization. MAISTRO will incorporate updated target lists and priorities from the active observer and could easily be over-ridden at any time. Fractions of the full FOBOS multiplex might also be reserved “manual targeting” as required by the program PI.

3.2. Automated Data Products. While the FOBOS data simulator is required for our data-science challenges, it also forms the basis of a delivered data reduction pipeline (DRP) for this instrument. This software will provide both the quick reduction assessments needed for dynamic targeting, as well as full reductions for scientific analysis. In the proposal period, we will also develop a preliminary design for a data analysis pipeline (DAP). Unique among Keck instruments, the FOBOS DAP will take advantage of the fixed spectral format and common target classes to provide high-level data products, including Doppler shift, emission-line strengths, and template continuum fits (cf., Westfall et al.; SDSS-IV MaNGA DAP). The DAP will also produce results from relevant machine-learning applications (e.g., redshifts at low-S/N).

Raw data, reduced spectra, and high-level DAP science products will be publicly delivered via user-friendly platforms built on the Keck Observatory Archive. After associated proprietary periods, data will be served for *all* FOBOS observations, creating a rich legacy data set for the

⁵MAISTRO: Modular Artificial Intelligence System for Target Reallocation and Observing.

astronomical community. Both program PIs and the larger community will be encouraged to develop the DRP and DAP to meet the needs of specific science applications. These software packages will be open source and publicly served (e.g., using GitHub).

REFERENCES

- Grogin, N. A., Kocevski, D. D., Faber, S. M., et al. 2011, *The Astrophysical Journal Supplement Series*, 197, 35
- Hemmati, S., Capak, P., Masters, D., et al. 2018, arXiv e-prints, arXiv:1808.10458
- Kohonen, T. 1990, *Nature*, 346, 24
- Le Fèvre, O., Vettolani, G., Garilli, B., et al. 2005, *A&A*, 439, 845
- Newman, J. A., Cooper, M. C., Davis, M., et al. 2013, *ApJS*, 208, 5
- Newman, J. A., Abate, A., Abdalla, F. B., et al. 2015, *Astroparticle Physics*, 63, 81
- Parks, D., Prochaska, J. X., Dong, S., & Cai, Z. 2018, *MNRAS*, 476, 1151
- Sanderson, R. E., Hartke, J., & Helmi, A. 2017, *ApJ*, 836, 234