
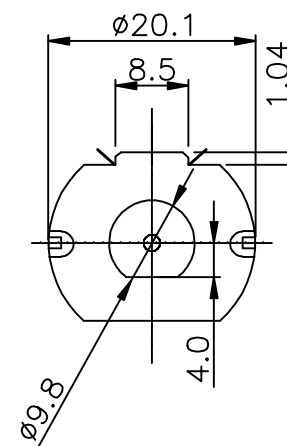
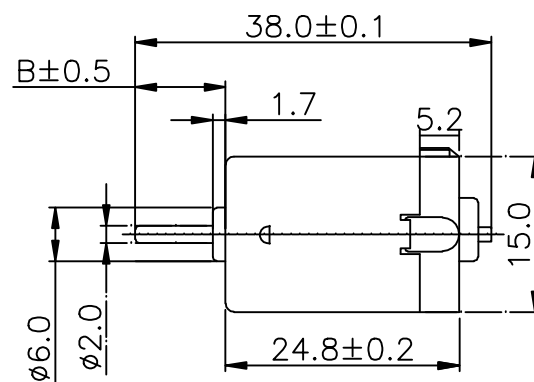


马达外观图 Motor appearance drawing:

[参考資料]

| | | | | | | | |
|-----------------------|---------|------------------------|---------------|------------------------------|-----|---------------------------------|------------|
| 客 户 Customer | | 马达型号: Model | FA-130RA-2270 | 转 向 Direction.of.Rotation | CCW | 样品编号: Sample.No | MD121009-1 |
| 额定电压: Rated vdtage | 1.5 VDC | 电压范围: Range.voltage | 1.5~3.0VDC | 产品用途: User | | 测 试 环 境: Testing.environment | 24℃/70%RH |

DIRECTION OF ROTATION

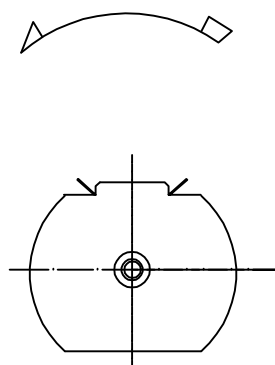

NOTES:


1. LENGTH OF SHAFT DIM "A" IS: 38.0MM
2. FRONT EXTENSION DIM "B" IS: 9.5_MM
3. END PLAY 0.05-0.4 MM
4. DIRECTION OF ROTATION:
MEASURED WITH SHAFT PUSHED TO PLASTIC END CAP.
ANTI-CLOCKWISE WHEN VIEWING MOTOR OUTPUT END WITH POSITIVE VOLTAGE APPLIED TO POSITIVE TERMINAL.

| | | | | | | | | | | | |
|----|------|------|---------|-------|----|-----|----------|-----|---------------|------|------------|
| | | | 20~ mm | ±0.30 | 签名 | 日期 | 型号 | 130 | 零件名称 | 马 达 | 共2页 第1页 |
| | | | 10~20mm | ±0.20 | 设计 | XQX | 12.10.09 | 比例 | 1:1 | 图纸编号 | MD121009-1 |
| | | | 0~10mm | ±0.10 | 审核 | | | | | | |
| 版次 | 修改内容 | 修改日期 | 尺寸范围 | 未注公差 | 批准 | | | | MERCURY MOTOR | | |

二，马达特性曲线 Motor characteristic curve:

[参考資料]


| | | | | | | | |
|------------------------|---------|------------------------|---------------|-------------------------------|-----|------------------------------|------------|
| 客 户: Customer | | 马达型号: Model | FA-130RA-2270 | 转 向: Direction of Rotation | CCW | 样品编号: Sample No | MD121009-1 |
| 额定电压: Rated Voltage | 1.5 VDC | 电压范围: Range Voltage | 1.5~3.0VDC | 产品用途: User | | 测试环境: Testing environment | 24℃/70%RH |

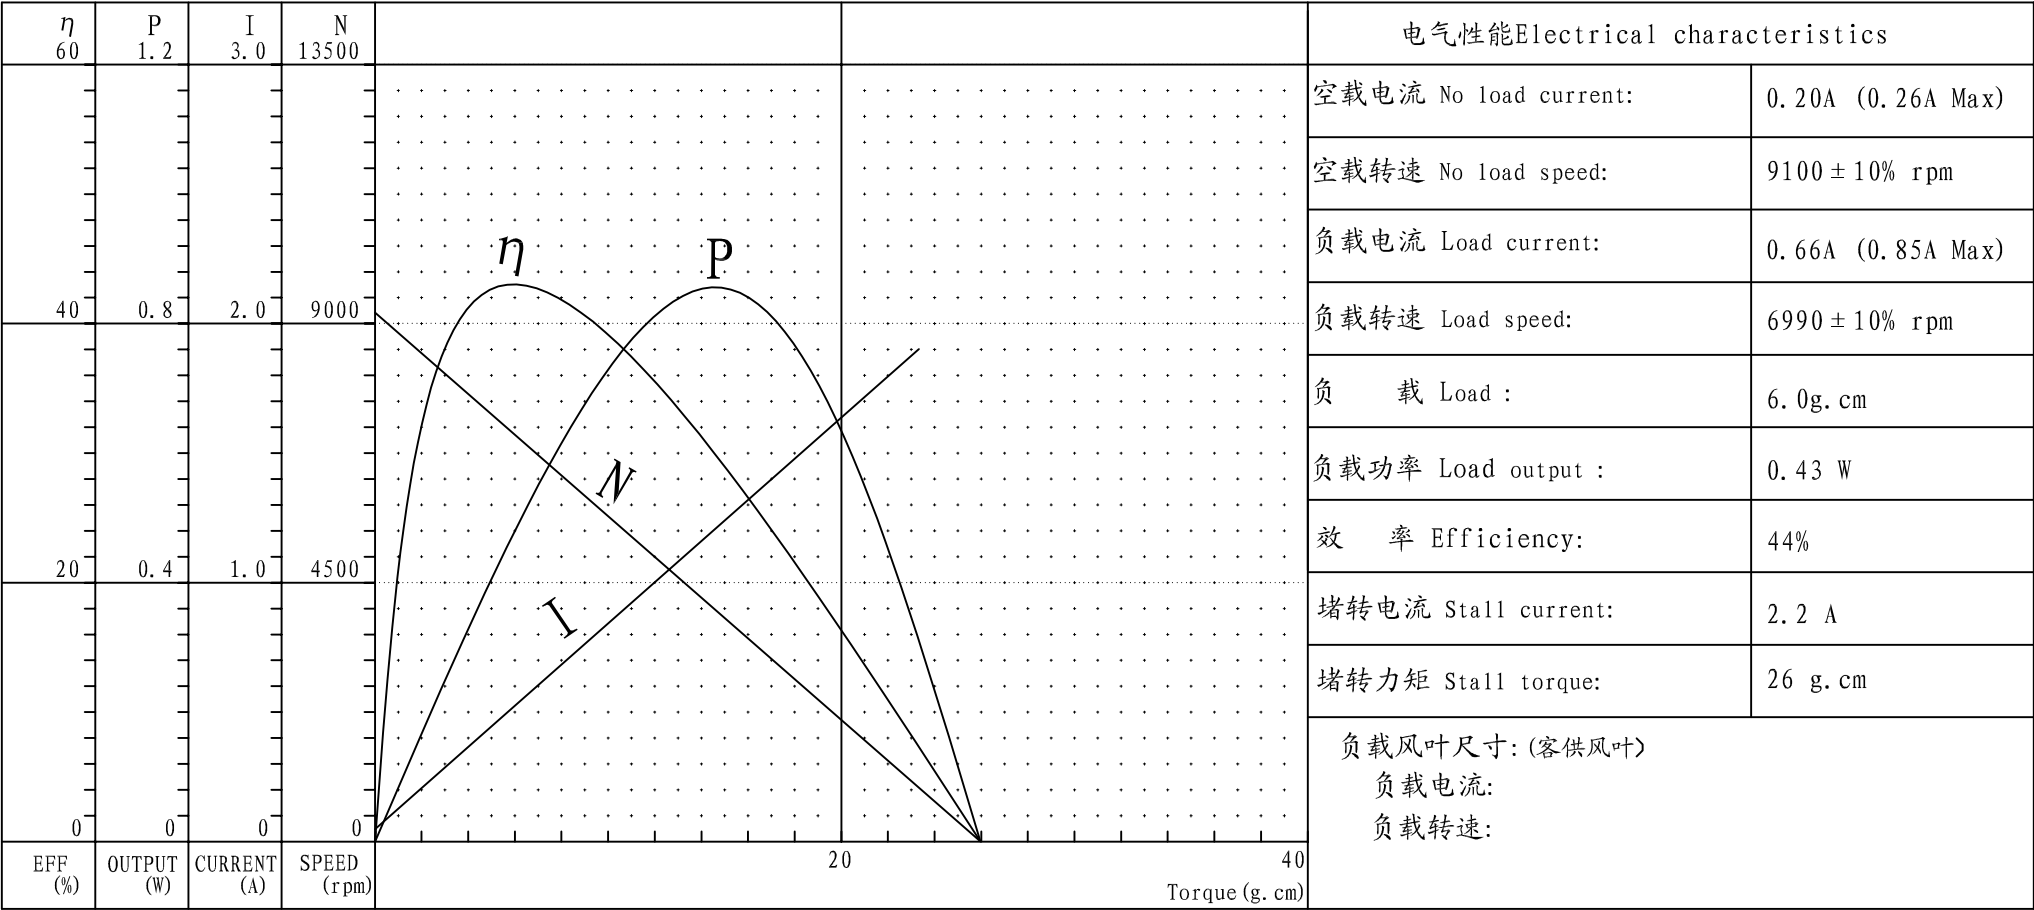

| | | | | | | | | | | | | |
|----|------|--|----------|------------|------|-----|----------|----|---------------|------|------------|---------|
| | | | 20~ mm | \pm 0.30 | | 签名 | 日期 | 型号 | 130RA | 零件名称 | 马 达 | 共2页 第2页 |
| | | | 10~ 20mm | \pm 0.20 | 测试 | XQX | 12.10.09 | 比例 | | 图纸编号 | MD121009-1 | |
| | | | 0~ 10mm | \pm 0.10 | 审核 | | | | | | | |
| 版次 | 修改内容 | | 修改日期 | 尺寸范围 | 未注公差 | 批准 | | | MERCURY MOTOR | | | |

二，马达特性曲线 Motor characteristic curve:

| | | | | | | | |
|------------------------|---------|------------------------|---------------|-------------------------------|-----|------------------------------|-------------|
| 客 户: Customer | | 马达型号: Model | FA-130RA-2270 | 转 向: Direction of Rotation | CCW | 样品编号: Sample No | MD181218-01 |
| 额定电压: Rated Voltage | 3.0 VDC | 电压范围: Range Voltage | 1.5~3.0VDC | 产品用途: User | | 测试环境: Testing environment | 24℃/70%RH |

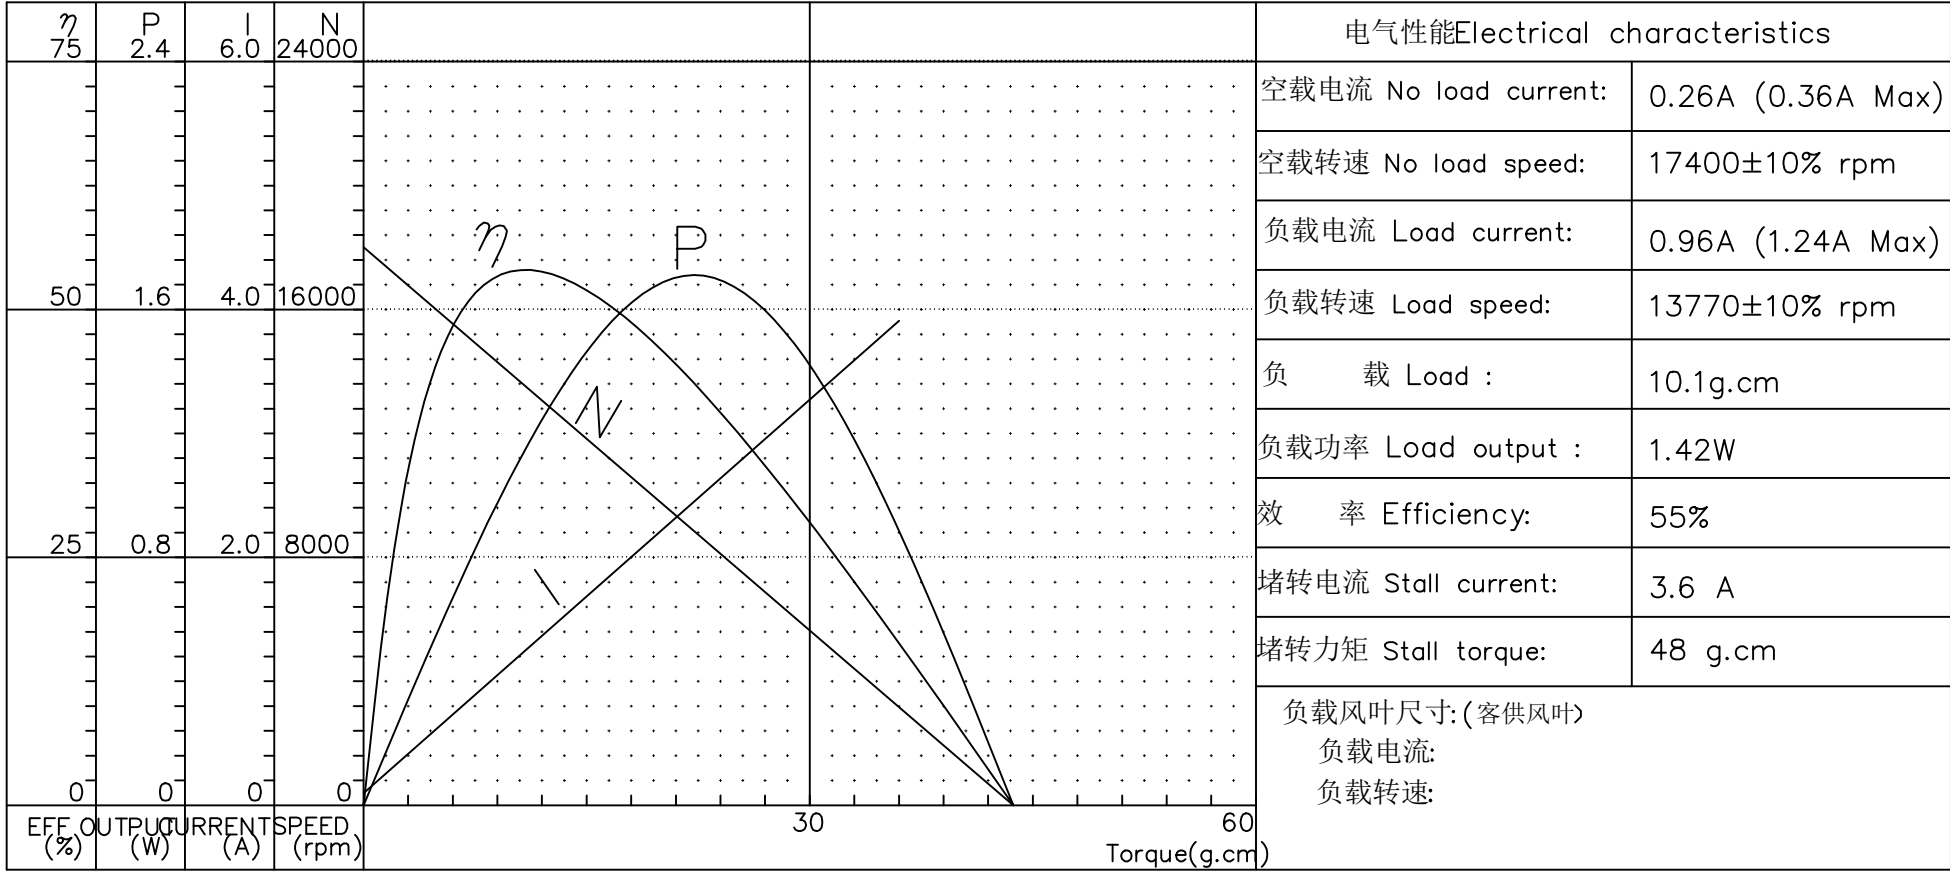

| | | | | | | | | | |
|----|------|--------------|------|------|----------|-------|------|---------------|---------|
| | | 20~ mm ±0.30 | 签名 | 日期 | 型号 | 130RA | 零件名称 | 马 达 | 共2页 第2页 |
| | | 10~20mm±0.20 | 测试 | XQX | 14.11.24 | 比例 | 图纸编号 | MD121022-1 | |
| | | 0~10mm±0.10 | 审核 | | | | | | |
| 版次 | 修改内容 | 修改日期 | 尺寸范围 | 未注公差 | 批准 | | | MERCURY MOTOR | |