

# Compact Single-Turn Coupled Inductor for MHz-Range Buck Converters with Zero Voltage Switching

Adrian Keil<sup>1</sup>, Vincent Lorentz<sup>2</sup>, Marcello Lobo Heldwein<sup>3</sup>

<sup>1</sup> Fraunhofer Institute for Integrated Systems and Device Technology IISB, Erlangen, Germany

<sup>2</sup> Chair of Electronics for Electrical Energy Storage, University of Bayreuth, Germany

<sup>3</sup> Chair of High-Power Converter Systems, Technical University of Munich, Germany

**Abstract**—The next generation of automotive vehicles and datacenters requires highly compact and efficient 48 V to 12 V point-of-load converters. This paper presents a novel single-turn planar inductor geometry with four poles and dual air gap for operation beyond 1 MHz that minimizes copper-losses from external proximity effect. An experimental prototype with 1 kW output achieves a power density of 80 kW/L (1300 W/in<sup>3</sup>) and a peak efficiency of 96.3%, demonstrating the potential of the inductor structure.

**Index Terms**—automotive 48 V to 12 V, coupled inductor, high power density, soft-switching

## I. INTRODUCTION

With a growing power demand, power distribution in both conventional and electric vehicles presents an increasing challenge. Traditionally, 12 V are used to distribute the power to all auxiliary devices which requires large cable diameters. Moving to a 48 V distribution bus reduces the cost of the wire assembly and losses [1]. As devices with lower power consumption are still operating at 12 V, highly compact and efficient point-of-load converters are required. This conversion stage is a critical part of distributed power architectures and its performance has a direct impact on system-level efficiency, thermal design, and overall build volume [1]. With the rise of Gallium Nitride (GaN) power devices, operating converters in the MHz-range has become feasible, significantly reducing their size [2]. At these frequencies, using planar magnetics with printed circuit board (PCB) windings is beneficial as they allow elaborate winding structures, direct integration with the other circuitry, and efficient cooling due to their large surface area [3]–[6]. Resonant converters with fixed gain based on planar transformers are a common choice for 48 V to 12 V conversion but they are unsuitable when a regulated output voltage is required over a wide input voltage range. In these cases, the classical buck converter is appropriate but the design of compact and efficient planar inductors is challenging due to the missing possibility for interleaving, the fringing effect of the air gap, and the DC-bias in the core.

In this paper, a 1 kW 2-phase coupled inductor buck converter for 48 V to 12 V conversion is studied. To minimize the overall volume, a target switching-frequency range of 1 MHz to 3 MHz was selected. Compared to previous work [3], [7]–

[10], the low operating voltage requires a very low inductance whose design becomes particularly challenging due to the large phase current of 40 A with 100 A of ripple (required to achieve soft-switching). Firstly, the effects of coupling on the electrical parameters are analyzed mathematically. Afterwards, different geometries for the single-turn inductor are optimized using a novel winding geometry and dual air gaps. The most promising geometry based on the four-pole structure is implemented and tested in an experimental prototype.

## II. COUPLED INDUCTOR BUCK CONVERTER IN TCM

*a) Working principle:* The topology of the two phase coupled-inductor buck converter is shown in Fig. 1. It operates like a conventional two-phase buck with both legs switched 180° out of phase. When leg 2 is pulled high, the current in leg 1 is also affected as shown in Fig. 2. For positive coupling, the falling slope is steepened while for negative coupling it is flattened. Operation in triangular current mode (TCM) enables zero voltage switching (ZVS) by increasing the phase current ripple to more than two times the average phase current (Fig. 2) [11]. The low-side switch is kept on after the zero-crossing of the leg current for a short period of time such that the current becomes negative. Once the low-side switch is disabled, the inductor current charges/discharges the GaN-FETs' drain-source capacitances until the high-side GaN-FET enters reverse conduction. High losses are observed during reverse conduction requiring precise dead-time calculation and adaptive switching frequency [12]. Turn-off losses remain but are small due to the large drain-source capacitance.

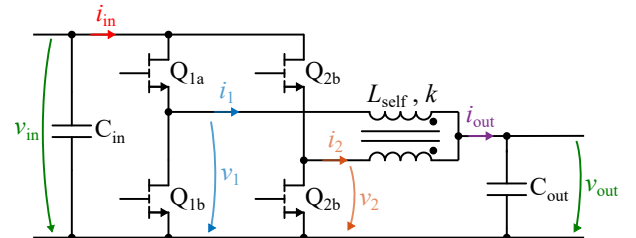


Fig. 1: Schematic of the Coupled Inductor Buck Converter.

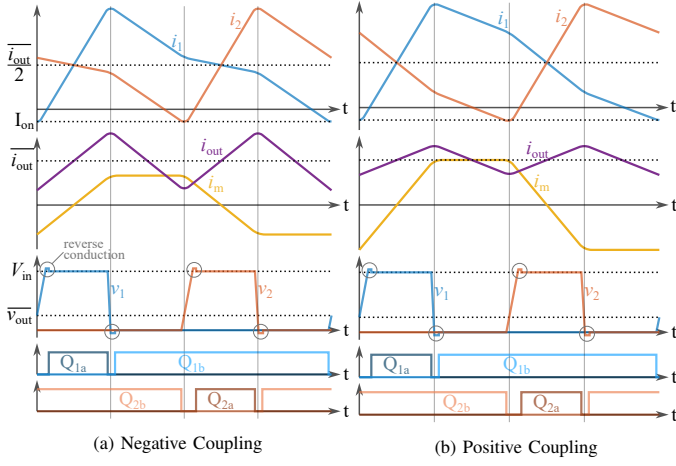


Fig. 2: Waveforms for positive and negative coupling; dead-times are exaggerated. It can be seen that the slopes are changed but the behavior in the vicinity of the switching instances is fundamentally the same.

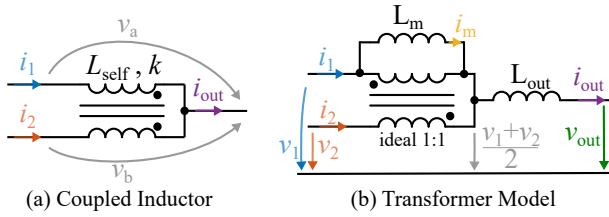


Fig. 3: The coupled inductor can be described with a self-inductance  $L_{\text{self}}$  and coupling factor  $k$  or by using an equivalent circuit consisting of an ideal 1:1 transformer with magnetizing inductance  $L_m$  and common output inductance  $L_{\text{out}}$ .

*b) Impact of the Coupling Factor:* The symmetrical coupled inductor shown in Fig. 3 (a) consists of two identical coils. They are wound in a way, that the flux of one coil links with the flux of the second coil and vice versa with both coils connected on one side. This can be described mathematically using

$$\begin{bmatrix} v_a \\ v_b \end{bmatrix} = \begin{bmatrix} 1 & k \\ k & 1 \end{bmatrix} L_{\text{self}} \begin{bmatrix} \frac{di_1}{dt} \\ \frac{di_2}{dt} \end{bmatrix} \quad (1)$$

with self-inductance  $L_{\text{self}}$  and magnetic coupling-factor  $k$  ( $-1 \leq k \leq 1$ ). In order to provide a more intuitive understanding, the equivalent circuit in Fig. 3 (b) is introduced. This model is not very common in the analysis of coupled-inductor circuits but has one mayor advantage: The currents of the two inductors only depend on the input and output voltages. The equivalency of both models can be shown from the governing equations:

$$\begin{bmatrix} v_a \\ v_b \end{bmatrix} = \begin{bmatrix} L_m + L_{\text{out}} & -L_m + L_{\text{out}} \\ -L_m + L_{\text{out}} & L_m + L_{\text{out}} \end{bmatrix} \begin{bmatrix} \frac{di_1}{dt} \\ \frac{di_2}{dt} \end{bmatrix} \quad (2)$$

Comparing the coefficients proves that both models are identical for

$$\begin{aligned} L_{\text{out}} &= (1+k) \frac{L_{\text{self}}}{2} \\ L_m &= (1-k) \frac{L_{\text{self}}}{2}. \end{aligned} \quad (3)$$

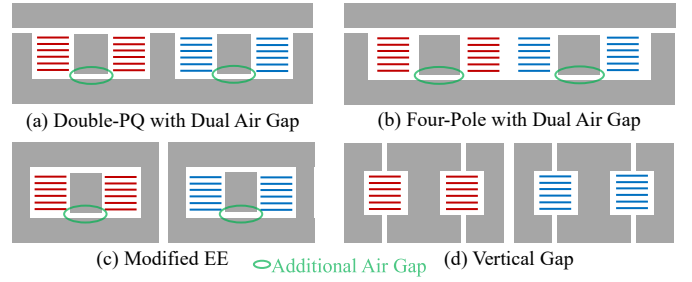


Fig. 4: Structure of the studied cores in side-view if cut through the middle. First winding in red, second winding in blue.

The voltage at the virtual central node in the transformer model is only dependent on the two leg voltages  $v_1$  and  $v_2$ , decoupling the governing equations:

$$\begin{aligned} \frac{di_{\text{out}}}{dt} &= \frac{1}{L_{\text{out}}} \left( \frac{v_1 + v_2}{2} - v_{\text{out}} \right) \\ \frac{di_m}{dt} &= \frac{1}{L_{\text{out}}} \left( \frac{v_1 - v_2}{2} \right) \end{aligned} \quad (4)$$

$$\text{with } i_{\text{out}} = i_1 + i_2 \quad \text{and} \quad i_m = i_1 - i_2$$

From this, the differential equations for each interval can be easily calculated and equations for the important converter parameters can be derived. An effective duty cycle  $D_{\text{eff}}$  is introduced with  $D_{\text{eff}} = D$  for  $D \leq 0.5$  and  $D_{\text{eff}} = 1 - D$  for  $D > 0.5$  to create universal equations. The peak-to-peak output ripple is then given by

$$\Delta I_{\text{out}} = \frac{2V_{\text{in}}}{f_s(1+k)L_{\text{self}}} D_{\text{eff}} \left( \frac{1}{2} - D_{\text{eff}} \right). \quad (5)$$

The peak-to-peak ripple in each leg which is important for soft-switching is

$$\Delta I_{\text{leg}} = \frac{V_{\text{in}} D_{\text{eff}}}{2f_s L_{\text{self}}} \left( \frac{2}{1+k} \left( \frac{1}{2} - D_{\text{eff}} \right) + \frac{1}{1-k} \right). \quad (6)$$

$I_{\text{on}}$  needs to be below a certain negative value  $I_{\text{on,max}}$  to guarantee a sufficiently short dead time. This is fulfilled for

$$f_s < \frac{V_{\text{in}} D_{\text{eff}}}{2L_{\text{self}}(\overline{i_{\text{out}}} + 2I_{\text{on,max}})} \left( \frac{2}{1+k} \left( \frac{1}{2} - D_{\text{eff}} \right) + \frac{1}{1-k} \right) \quad (7)$$

where  $\overline{i_{\text{out}}}$  is the average value of  $i_{\text{out}}$ .

### III. INDUCTOR DESIGN

*a) Inductor geometry:* This work introduces an additional air-gap to different designs as shown in Fig. 4. Four geometries, two coupled, and two uncoupled ones, were compared: The Double-PQ structure (Fig. 4 (a)) was originally introduced by [3] and combines two EQ-cores placed next to each other. The four-pole structure (Fig. 4 (b)) is very similar but omits the central pole [10]. Both of these geometries were originally constructed with two pieces such that there is only an air gap at the top. The third geometry (Fig. 4 (c)) is basically an EE-Core but instead of one central gap, two gaps are used. Lastly, the vertical gap geometry (Fig. 4 (d)) proposed by [5] is investigated. The vertical air gap creates

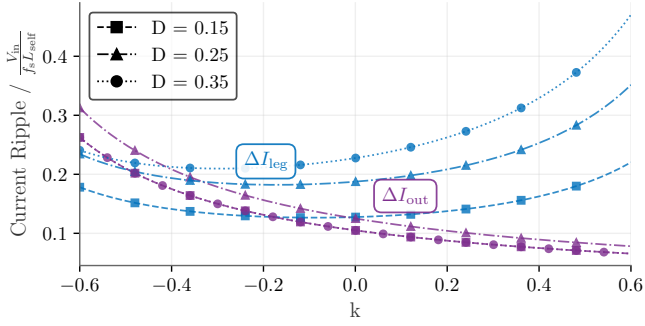


Fig. 5: Peak-to-peak leg and output current ripple in dependency of the coupling factor for different duty cycles  $D$ . Note: For  $D = 0.15$  and  $D = 0.35$  the output current ripple is identical so the curves overlap.

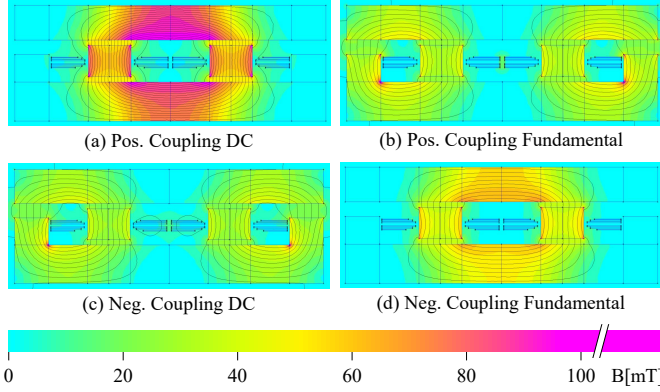


Fig. 6: Flux-Distribution for negative and positive coupling of otherwise identical designs for a DC phase current of 40 A and 100 A of ripple.

a fringing field in the middle of the windings. This partly compensates the internal proximity effect and draws current to the center, reducing losses. The main downside of this design is the significant external field on top and bottom of the inductor, making cooling difficult as no conductive material can be placed on top or bottom of the core.

All of our designs use a single turn with all six layers in parallel, significantly differing from the original designs. Designs with more than one turn were not considered because the desired inductance and coupling-factor could not be achieved in that case due to fringing and flux leakage between the pillars.

*b) Material limitations:* TDK's PC200 was selected for this design as it exhibits very low loss in the range of 1 MHz to 4 MHz. However, the performance of PC200 significantly degrades for a field strength  $H_{dc} > 50$  A/m and at  $H_{dc} > 100$  A/m its losses double [13]. Therefore, the inductor was designed with a maximum  $H_{dc}$  of 40 A/m to have some margin.

*c) Positive vs negative coupling:* Equation (5) and (6) are plotted in Fig. 5 for positive and negative coupling-factors. While a strong positive coupling decreases  $\Delta I_{out}$  it increases  $\Delta I_{leg}$ . Overall, positive coupling is slightly beneficial from an electrical point of view as it reduces the output ripple. The higher  $\Delta I_{leg}$  requires a larger  $L_{self}$  resulting in even lower

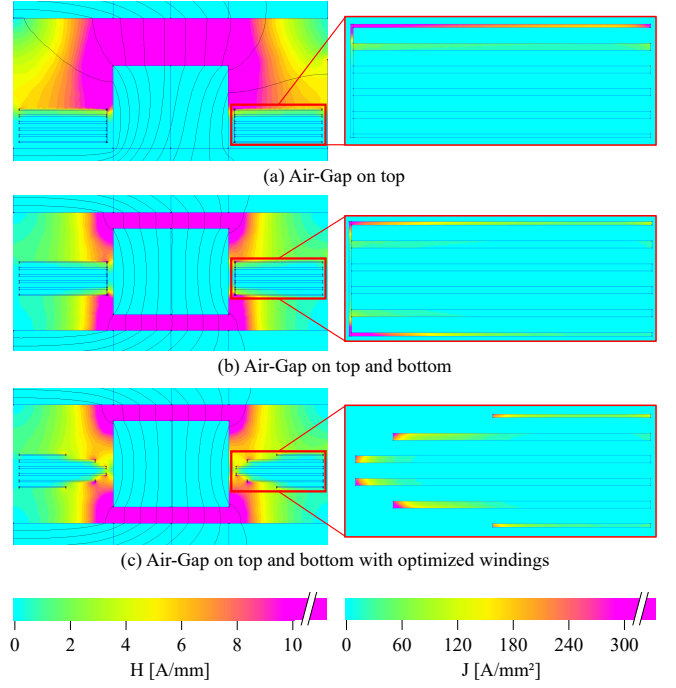


Fig. 7: Field and current distribution for different approaches. Because all layers are in parallel the current crowds in areas of large field-strength. By splitting the gap, the field gets distributed more evenly and the current distribution improves. Utilizing a smaller width for the outer layers, i.e. moving the copper away from the high-flux areas distributes the current even better.

$\Delta I_{out}$ . However, there is a very notable difference in the flux distribution as shown in Fig. 6: For negative coupling, the two windings generate an opposing magnetomotive force at DC, resulting in a low flux that circulates through the outer air gaps. For positive coupling, the two magnetomotive forces are driving a DC-flux in the same direction causing a large flux that only circulates between the two windings where the reluctance is much lower. The peak flux-density is almost three times larger for positive coupling and as the core should be designed with respect to the  $H_{dc}$  limit, this means thicker top and bottom areas would be needed. Therefore, negative coupling is selected for this application<sup>1</sup>.

*d) Simulation Process:* For the simulation, the open-source 2D FEM software FEMM was used due to its high speed and easy integration with Matlab. As the core-structures are neither planar nor axisymmetric, the designs were first transformed to a planar structure. All cross-sectional areas are kept the same and the depth of the design is determined by the length of the winding.

*e) Split air gap and optimized windings:* The external proximity effect caused by the air gap plays an important role for the current distribution and consequently the losses of this high-frequency inductor. The field-strength at the top of the windings is large and almost zero at the bottom as shown in

<sup>1</sup>Note that for lower frequency materials which are less affected by DC flux, the picture would change: Those designs would likely benefit from positive coupling as the flux-density at the fundamental is reduced.

TABLE I: Comparison of the size and simulated loss of the optimized pillar and windings for the four-pole design.

|                                            | Volume [cm <sup>3</sup> ] | Copper Loss [W] |
|--------------------------------------------|---------------------------|-----------------|
| Original design                            | 5.8                       | 7.0             |
| Air gap on top and bottom                  | 5.5                       | 5.7             |
| Air gap on top and bottom, curved windings | 5.3                       | 5.0             |

TABLE II: Comparison of the size and simulated loss of the different core structures for 1.5 MHz respecting the  $H_{dc}$  limit. The Four-Pole structure shows the lowest losses and volume.

|              | Total Area [cm <sup>2</sup> ] | Height [cm] | Volume [cm <sup>3</sup> ] | Copper Loss [W] |
|--------------|-------------------------------|-------------|---------------------------|-----------------|
| Four-Pole    | 5.5                           | 0.9         | 5.3                       | 5.0             |
| Double PQ    | 6.2                           | 0.9         | 5.5                       | 5.2             |
| Vertical gap | 8.0                           | 0.7         | 5.8                       | 5.6             |
| EE core      | 8.1                           | 1.1         | 8.9                       | 6.0             |

Fig. 7. As a result, the AC current is only flowing in the top layers. By centering the pillar vertically in the window such that there is an equal air gap on the top and on the bottom, the field-strength is distributed much more uniformly and current flows in the top and bottom layers. This results in a 20% reduction in losses, which can be reduced even further by using curved windings as shown in Table I.

f) *Comparison of Core Structures:* Table II compares the different core structures for a design with  $f_s = 1.5$  MHz at  $i_{out} = 80$  A and  $k = -0.3$ . This coupling factor was chosen because it allows the use of small air gaps at the pillar which reduces copper losses due to the smaller external field while still not increasing  $\Delta I_{out}$  too much. The cross-sectional areas were designed to result in  $H_{dc} \leq 40$  A/m. All designs except the one with vertical gap use the optimized curved windings. The four-pole structure showed both lowest losses and lowest volume and was chosen for the implementation. The final design of the four-pole structure with optimized windings is shown in Fig. 8.

#### IV. EXPERIMENTAL PROTOTYPE

The assembled prototype is shown in Fig. 9. The boxed volume of just 12.4 cm<sup>3</sup> results in a power density of 80 kW/L (1300 W/in<sup>3</sup>). It's main hardware components are listed in table III. Two parallel low side transistors per phase are used as the converter operates at a low duty cycle. To minimize the stray inductance, the decoupling capacitors for the half-bridges are connected to the devices with the vertical power-loop

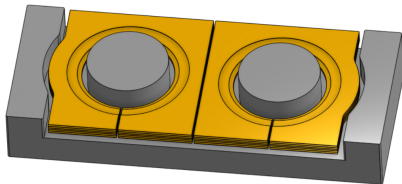


Fig. 8: Final design of the four-pole inductor; top-piece not shown.

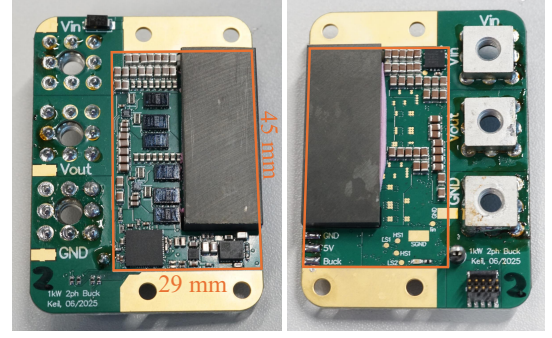
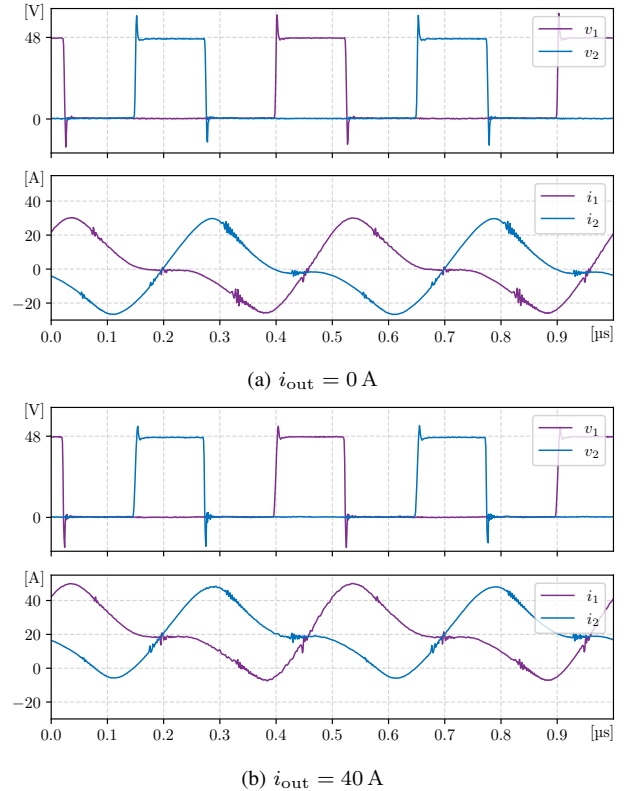


Fig. 9: Fully assembled prototype (without heatspreader). The converter area shown in orange is 45 x 29 x 9.5 mm. Outside of this area only the connectors for power and programming are placed as well as a protection diode and the programming resistors.

TABLE III: Overview of the main hardware components.

| Component         | Part                                           |
|-------------------|------------------------------------------------|
| C <sub>in</sub>   | 44x 2.2 $\mu$ F 100 V X7R (20 $\mu$ F at 48 V) |
| C <sub>out</sub>  | 16x 2.2 $\mu$ F 100 V X7R (33 $\mu$ F at 12 V) |
| GaN-FETs          | Infineon IGC025S08S1                           |
| Gate Driver       | Analog Devices LT8418                          |
| Microcontroller   | Texas Instruments F280049C                     |
| Aux. Power Supply | Texas Instruments TPSM365R6                    |
| Current Sensor    | Allegro ACS37220                               |

Fig. 10: Measured waveforms at  $f_s = 2$  MHz with a 5 ns dead-time. *Note:* The current-sensor is operating close to its maximum bandwidth and has deskewing applied.



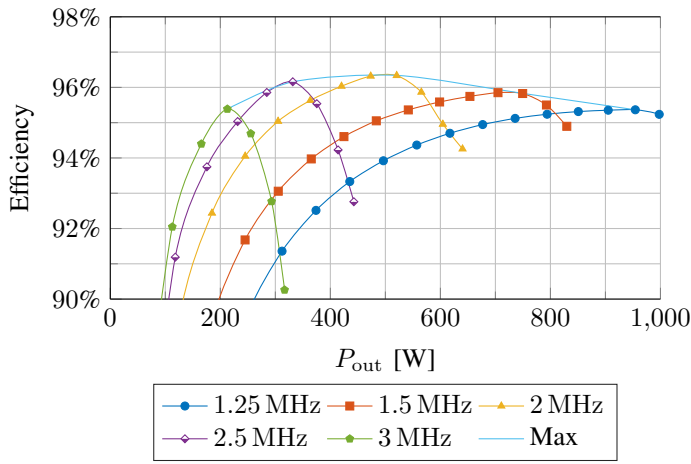


Fig. 11: Efficiency of the prototype for  $V_{in} = 48$  V and  $D = 0.25$ .

layout which uses the first inner layer as a return path [14]. In contrast to other designs, the large onboard capacitance allows the converter to operate without any additional off-board capacitance.

Fig. 10 shows the measured waveforms of the converter. To measure the current, a dedicated PCB was manufactured which includes two Infineon TLE5571 tunnel magnetoresistance (TMR) current sensors (pre-production version). It should be noted that at 2 MHz these sensors operate close to their bandwidth resulting in slightly distorted waveforms. Nonetheless, the measurement shows that the converter is working as expected: At  $i_{out} = 0$  A, the turn-on and turn-off current is equal, causing equal switching peaks. At  $i_{out} = 40$  A, the negative current at turn-on is small, causing a slow rise of the switch-node and only a small overshoot, while the turn-off overshoot increases. If the current is increased further, the converter loses soft-switching causing the significant drop in efficiency beyond 550 W for 2 MHz as shown in Fig. 11. The converter's maximum efficiency is 96.3 % at 550 W, putting it in the same range as comparable LLC designs [6], [15]. To use the converter in a real application, a variable switching frequency is required. The expected resulting efficiency curve is indicated in Fig. 11 as *Max*.

## V. CONCLUSION

This paper introduced a novel, negatively coupled, single turn inductor design which enables very high power density and efficiency in a two-phase buck converter for 48 V to 12 V conversion. The challenging demand of a low inductance at high phase current was solved by connecting all layers in parallel with a stepped conductor width to mitigate the effects of the proximity effect. By using dual air-gaps, the current distribution was further improved resulting in a 30 % reduction in copper-losses compared to the standard single-air gap design with non-stepped windings.

The effects of positive and negative coupling were evaluated in detail. It was shown that even though negative coupling exhibits higher leg and output current ripple, it allows a much

more compact construction due to the lower DC flux. Following the comparison of four different inductor geometries, the best design was implemented in an experimental prototype which achieves a power density of 80 kW/L (1300 W/in<sup>3</sup>) for 1 kW and a peak efficiency of 96.3 %, demonstrating the potential of the inductor.

## REFERENCES

- [1] A. K. Kumawat and A. K. Thakur, "A Comprehensive Study of Automotive 48-Volt Technology," *International Journal of Mechanical Engineering*, vol. Volume 4, Jan. 2019. doi: 10.14445/23488360/IJME-V4I5P103 Publisher: SSRG International Journal. [Online]. Available: <https://www.internationaljournalssrg.org/IJME/paper-details?Id=73>
- [2] N. Weitz, S. Ehrlich, P. Freundl, J. Schültzke, and M. März, "A High Frequency Resonant Push-Pull Converter with a Single Integrated Magnetic Component," in *2023 IEEE Applied Power Electronics Conference and Exposition (APEC)*, Mar. 2023. doi: 10.1109/APEC43580.2023.10131366 pp. 435–440, iSSN: 2470-6647. [Online]. Available: <https://ieeexplore.ieee.org/document/10131366>
- [3] S. Wang, P. H. Pham, Q. Li, A. Nabih, and P. R. Prakash, "PCB Winding-Based Coupled Inductor for a High-Frequency DC/DC Converter with 99% Efficiency," in *2023 IEEE Applied Power Electronics Conference and Exposition (APEC)*, Mar. 2023. doi: 10.1109/APEC43580.2023.10131439 pp. 420–425, iSSN: 2470-6647. [Online]. Available: <https://ieeexplore.ieee.org/document/10131439>
- [4] B. Li, W. Qin, Y. Yang, Q. Li, F. C. Lee, and D. Liu, "A High Frequency High Efficiency GaN Based Bi-Directional 48V/12V Converter with PCB Coupled Inductor for Mild Hybrid Vehicle," in *2018 IEEE 6th Workshop on Wide Bandgap Power Devices and Applications (WiPDA)*, Oct. 2018. doi: 10.1109/WiPDA.2018.8569067 pp. 204–211. [Online]. Available: <https://ieeexplore.ieee.org/document/8569067>
- [5] J. Schäfer, D. Bortis, and J. W. Kolar, "Novel Highly Efficient/Compact Automotive PCB Winding Inductors Based on the Compensating Air-Gap Fringing Field Concept," *IEEE Transactions on Power Electronics*, vol. 35, no. 9, pp. 9617–9631, Sep. 2020. doi: 10.1109/TPEL.2020.2969295 Conference Name: IEEE Transactions on Power Electronics. [Online]. Available: <https://ieeexplore.ieee.org/document/8968357>
- [6] Y. Cai, M. H. Ahmed, Q. Li, and F. C. Lee, "Optimal Design of Megahertz LLC Converter for 48-V Bus Converter Application," *IEEE Journal of Emerging and Selected Topics in Power Electronics*, vol. 8, no. 1, pp. 495–505, Mar. 2020. doi: 10.1109/JESTPE.2019.2939469. [Online]. Available: <https://ieeexplore.ieee.org/document/8823928>
- [7] C. Nan and R. Ayyanar, "A 1 MHz bi-directional soft-switching DC-DC converter with planar coupled inductor for dual voltage automotive systems," in *2016 IEEE Applied Power Electronics Conference and Exposition (APEC)*, Mar. 2016. doi: 10.1109/APEC.2016.7467908 pp. 432–439. [Online]. Available: <https://ieeexplore.ieee.org/abstract/document/7467908>
- [8] Y. Dong, "Investigation of Multiphase Coupled-Inductor Buck Converters in Point-of-Load Applications," Jul. 2009, publisher: Virginia Tech. [Online]. Available: <http://hdl.handle.net/10919/28469>
- [9] D. Sha, Y. Zhao, and D. Zhang, "ZVS-Interleaved Synchronous Buck DC–DC Converter With a Coupled Inductor by Varying Switching Frequency and Deadtime," *IEEE Transactions on Power Electronics*, vol. 37, no. 7, pp. 8190–8198, Jul. 2022. doi: 10.1109/TPEL.2022.3141253 Conference Name: IEEE Transactions on Power Electronics. [Online]. Available: <https://ieeexplore.ieee.org/abstract/document/9674799>
- [10] M. Hua, J. Chen, G. Xu, and H. Wu, "Ultra-thin Coupled Inductor for a GaN-Based CRM Buck Converter," in *2021 IEEE Workshop on Wide Bandgap Power Devices and Applications in Asia (WiPDA Asia)*, Aug. 2021. doi: 10.1109/WiPDAAsia51810.2021.9656036 pp. 138–142. [Online]. Available: <https://ieeexplore.ieee.org/document/9656036/citations#citations>
- [11] C. Henze, H. Martin, and D. Parsley, "Zero-voltage switching in high frequency power converters using pulse width modulation," in *APEC '88 Third Annual IEEE Applied Power Electronics Conference and Exposition*, Feb. 1988. doi: 10.1109/APEC.1988.10548 pp. 33–40. [Online]. Available: <https://ieeexplore.ieee.org/document/10548>

- [12] M. Haider, J. A. Anderson, N. Nain, G. Zulauf, J. W. Kolar, D. Xu, and G. Deboy, "Analytical Calculation of the Residual ZVS Losses of TCM-Operated Single-Phase PFC Rectifiers," *IEEE Open Journal of Power Electronics*, vol. 2, pp. 250–264, 2021. doi: 10.1109/OJPEL.2021.3058048. [Online]. Available: <https://ieeexplore.ieee.org/document/9351687>
- [13] TDK, "High-Frequency, Low-Loss Ferrite Material PC200." [Online]. Available: [https://product.tdk.com/de/techlibrary/productoverview/ferrite\\_pc200.html](https://product.tdk.com/de/techlibrary/productoverview/ferrite_pc200.html)
- [14] D. Reusch and J. Strydom, "Understanding the Effect of PCB Layout on Circuit Performance in a High-Frequency Gallium-Nitride-Based Point of Load Converter," *IEEE Transactions on Power Electronics*, vol. 29, no. 4, pp. 2008–2015, Apr. 2014. doi: 10.1109/TPEL.2013.2266103. [Online]. Available: <https://ieeexplore.ieee.org/document/6531683>
- [15] M. H. Ahmed, A. Nabih, F. C. Lee, and Q. Li, "Low-Loss Integrated Inductor and Transformer Structure and Application in Regulated LLC Converter for 48-V Bus Converter," *IEEE Journal of Emerging and Selected Topics in Power Electronics*, vol. 8, no. 1, pp. 589–600, Mar. 2020. doi: 10.1109/JESTPE.2019.2952878. [Online]. Available: <https://ieeexplore.ieee.org/abstract/document/8895995>