
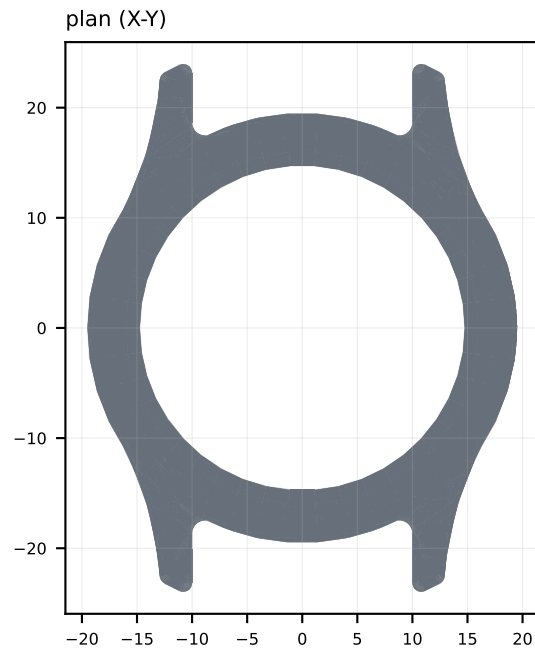


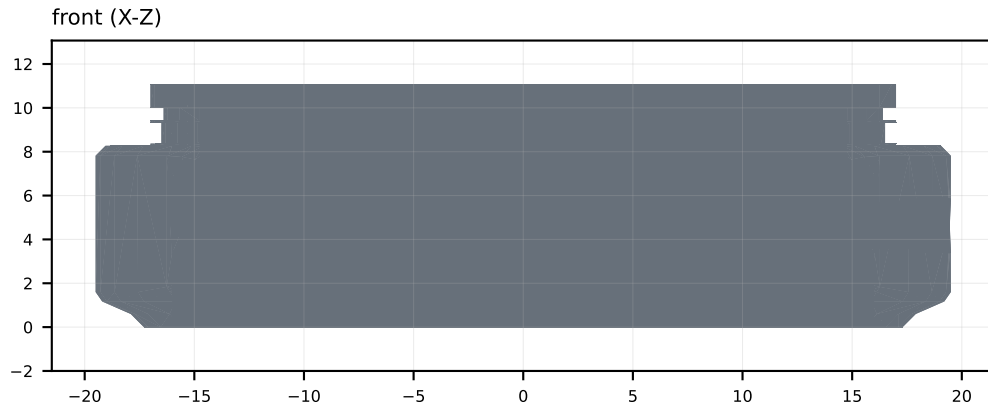

### CASEBACK THREAD

M32 x 1.0 - 6H internal, full depth z 0-3.5 (PROTOTYPE substitution for the design's M32 x 0.5; mate with x04 external thread)

### CRYSTAL BORE

Ø32.00 H7, seat depth per STEP

### DIAL PASS BORE

Ø31.40 H8 (dial loads from the back)

### DIAL POCKET

Ø31.30 +0.05/-0

### CROWN / TUBE BORE

Ø2.48 H7 through flank at z 4.62 from back plane; inner Ø2.00 stem clearance per STEP

### SPRING-BAR HOLES

Ø1.35 ±0.05 thru, both lugs, 90° csk to Ø1.65 both faces; position ±0.05

### DETENT BALL POCKET

Ø0.65 pocket in shoulder: best effort, may be omitted on prototype

### CRITICALS

case Ø39.00 ±0.05; lug gap 20.00 +0.15/-0; lug-to-lug 47.90 ±0.10

### FINISH


as machined or light bead blast; no polishing

## KELSUS INTERCONTINENTAL - FITMENT PROTOTYPE KIT

SHEET 1/7 PART: MIDCASE FILE: x01\_midcase.step MATERIAL: Aluminum 6061-T6 (round 2: 316L) QTY: 1

GENERAL: dims in mm. Geometry per attached STEP (master). Untoleranced machined dims ±0.05. Break sharp edges R0.1 unless noted. Engravings are cosmetic: best effort, do not quote polishing/filling.

front (X-Z)

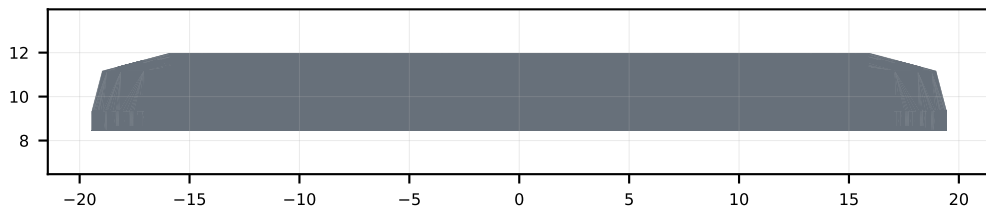

#### BORE

Ø34.10 H8 (rotates on case boss Ø34.00)

#### INTERNAL GROOVE

per STEP (Ø34.70 x 0.70) - spring ring omitted on prototype, groove still required

#### NUMERALS / TRIANGLES

engraved 0.25 deep: cosmetic, best effort, no lacquer fill

#### UNDERSIDE SCALLOPS

120 x R0.50 x 0.18 deep: cosmetic on prototype, may be omitted


#### COIN EDGE

per STEP; best effort

#### FINISH

as machined

plan (X-Y)

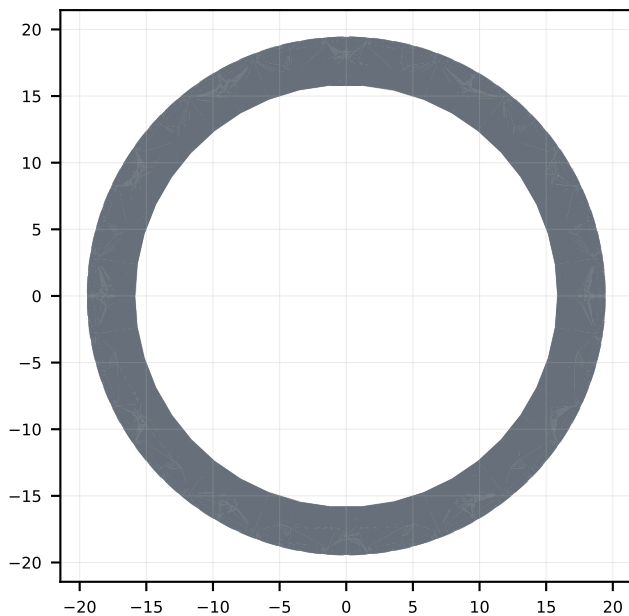


### KELSUS INTERCONTINENTAL - FITMENT PROTOTYPE KIT

SHEET 2/7 PART: BEZEL 24H FILE: x02\_bezel.step MATERIAL: Aluminum 6061-T6 QTY: 1

GENERAL: dims in mm. Geometry per attached STEP (master). Untoleranced machined dims  $\pm 0.05$ . Break sharp edges R0.1 unless noted. Engravings are cosmetic: best effort, do not quote polishing/filling.

front (X-Z)

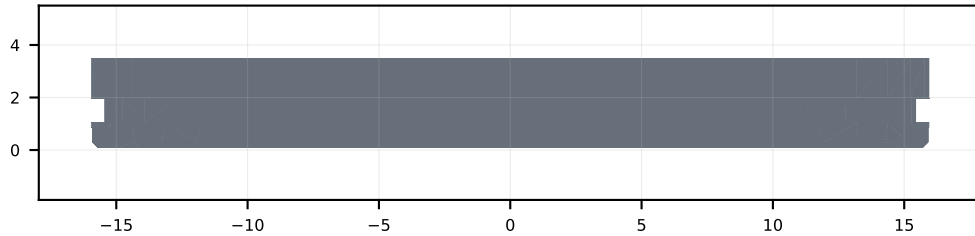

#### THREAD

M32 x 1.0 - 6g external on Ø32 band (PROTOTYPE substitution for M32 x 0.5; mate with x01 internal thread)

#### O-RING GROOVE

on OD per STEP: retain (gasket not fitted on prototype)

#### WINDOW POCKET

Ø23.42 +0.05/-0 x 1.40 deep, internal retaining ledge per STEP (mates x05 acrylic window)

#### WRENCH NOTCHES

6x per STEP


#### ENGRAVING

KELSUS INTERCONTINENTAL, 0.18 deep: cosmetic, best effort

#### FINISH

as machined

plan (X-Y)

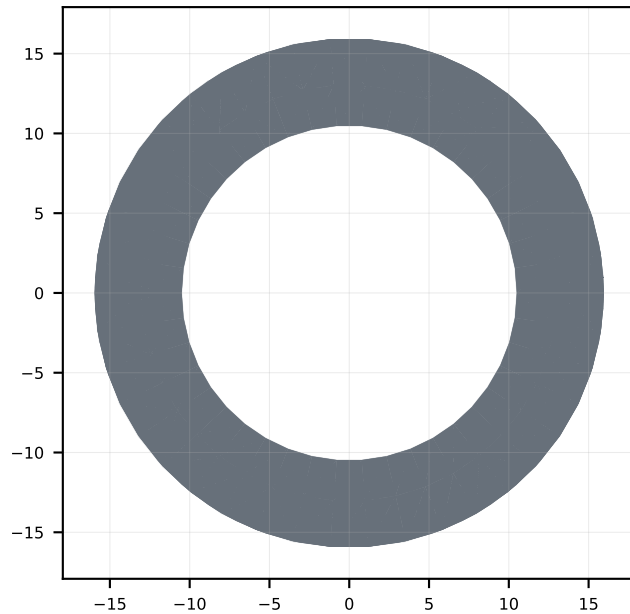


### KELSUS INTERCONTINENTAL - FITMENT PROTOTYPE KIT

SHEET 3/7 PART: CASEBACK RING FILE: x04\_caseback.step MATERIAL: Aluminum 6061-T6 (round 2: 316L) QTY: 1

GENERAL: dims in mm. Geometry per attached STEP (master). Untoleranced machined dims  $\pm 0.05$ . Break sharp edges R0.1 unless noted. Engravings are cosmetic: best effort, do not quote polishing/filling.

front (X-Z)

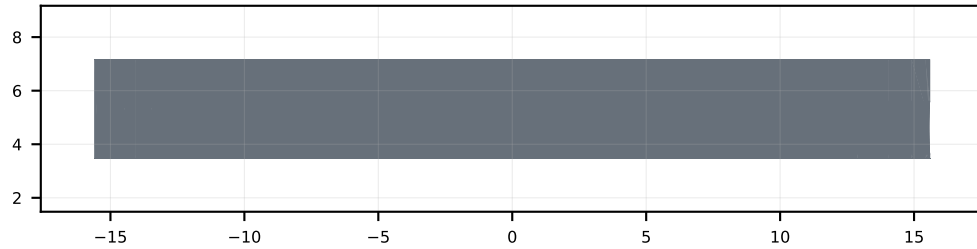

#### MOVEMENT REGISTER

Ø25.60 Js8 - CRITICAL, this locates the Miyota 9075

#### FLANGE SEAT

Ø26.00 relief per STEP

#### OD

Ø31.20 (slips into dial pass bore Ø31.40 H8)


#### STEM SLOT

per STEP, aligns with case tube bore

#### FINISH

as machined


plan (X-Y)

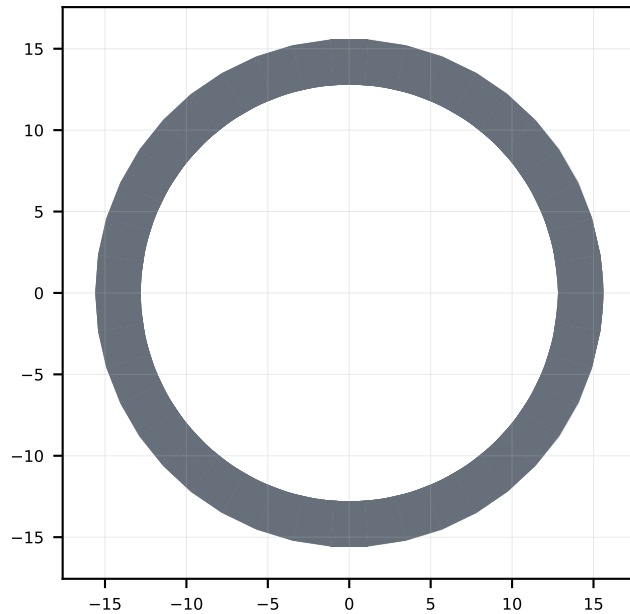

### KELSUS INTERCONTINENTAL - FITMENT PROTOTYPE KIT

SHEET 4/7 PART: MOVEMENT RING FILE: x08\_movement\_ring.step MATERIAL: Acetal / Delrin (POM), white or black QTY: 1

GENERAL: dims in mm. Geometry per attached STEP (master). Untoleranced machined dims  $\pm 0.05$ . Break sharp edges R0.1 unless noted. Engravings are cosmetic: best effort, do not quote polishing/filling.

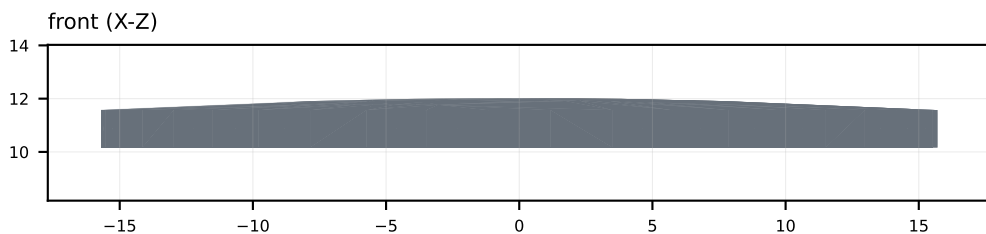

## OD


Ø31.40 -0.05 (design uses a gasket; prototype is a slip fit into Ø32.00 bore, retained with adhesive by customer)

## PROFILE

flat-top dome per STEP

## FINISH


machine finish acceptable; vapor polish if offered

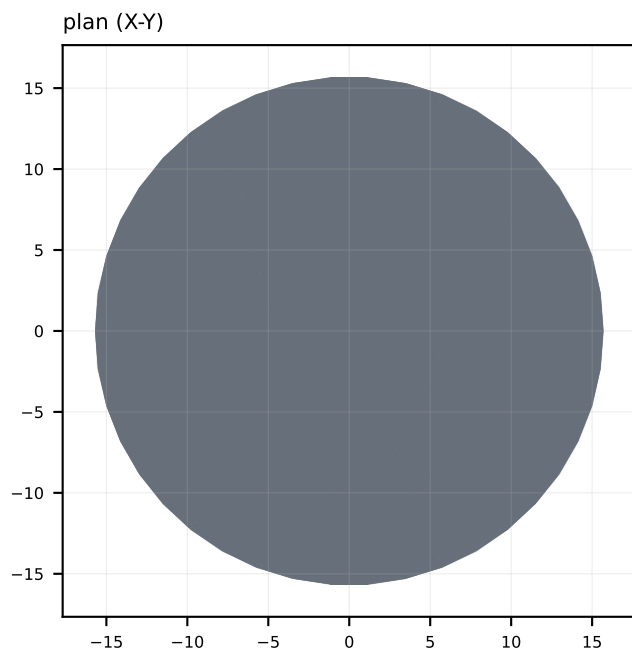

## KELSUS INTERCONTINENTAL - FITMENT PROTOTYPE KIT

SHEET 5/7 PART: CRYSTAL (PROTOTYPE) FILE: x03\_crystal\_acrylic.step MATERIAL: Acrylic PMMA, clear QTY: 1

GENERAL: dims in mm. Geometry per attached STEP (master). Untoleranced machined dims  $\pm 0.05$ . Break sharp edges R0.1 unless noted. Engravings are cosmetic: best effort, do not quote polishing/filling.

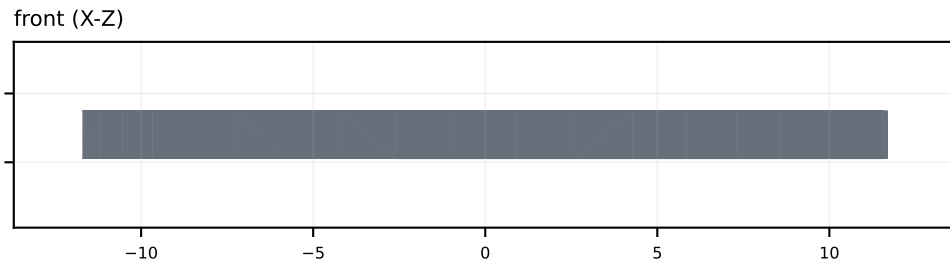


#### DISC

Ø23.40 -0.05 x 1.40 (slip into x04 pocket, customer retains with adhesive)

#### FINISH

machine finish acceptable

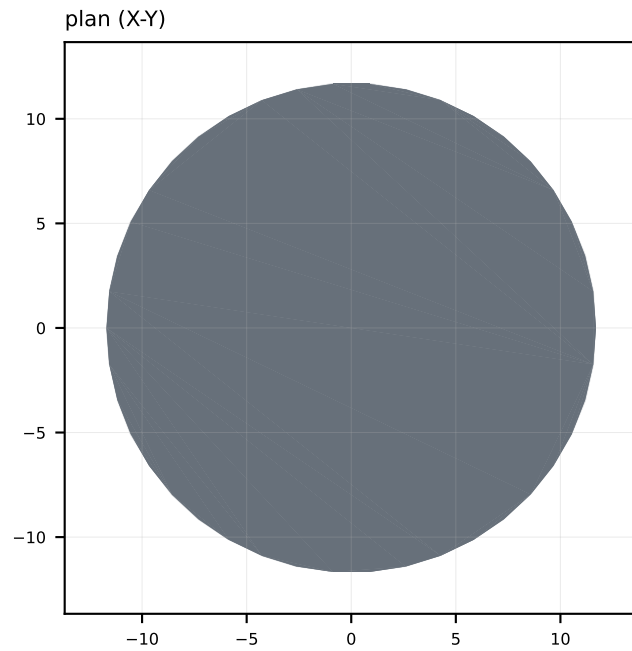


### KELSUS INTERCONTINENTAL - FITMENT PROTOTYPE KIT


SHEET 6/7 PART: EXHIBITION WINDOW (PROTOTYPE) FILE: x05\_window\_acrylic.step MATERIAL: Acrylic PMMA, clear QTY: 1

GENERAL: dims in mm. Geometry per attached STEP (master). Untoleranced machined dims  $\pm 0.05$ . Break sharp edges R0.1 unless noted. Engravings are cosmetic: best effort, do not quote polishing/filling.

front (X-Z)

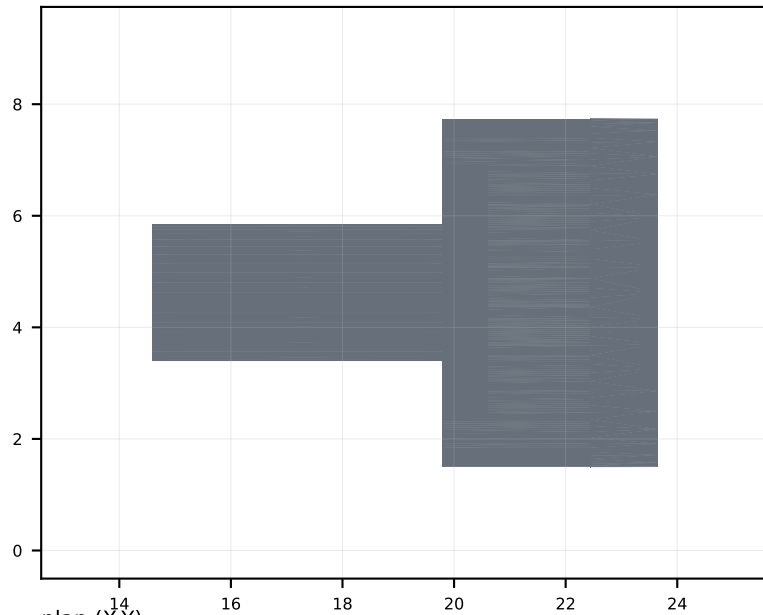

plan (X-Y)

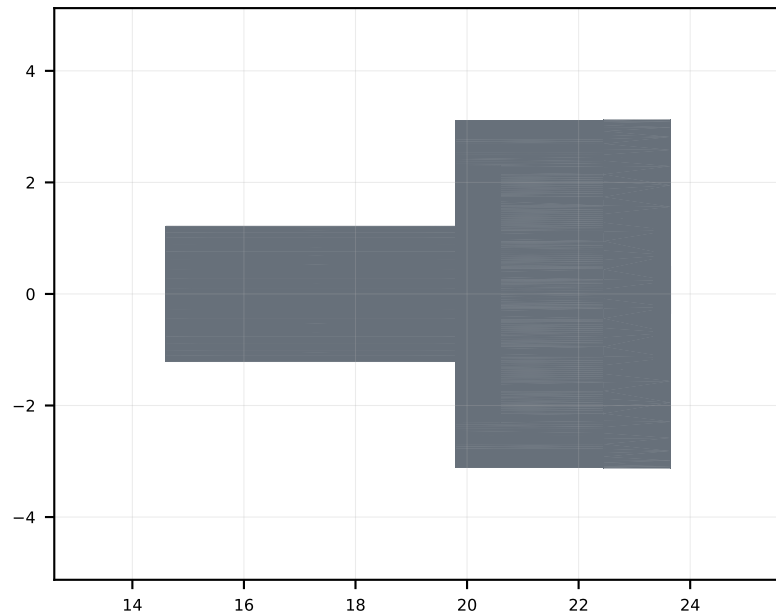

#### **PIN**

Ø2.44 -0.02 x 5.2 long, integral (slips into case tube bore Ø2.48 H7; friction fit, removable). PROTOTYPE substitution for the threaded crown + tube.

#### **BODY**

Ø6.25 x 3.85 per STEP; coin edge best effort

#### **K LOGO ON END FACE**

engraved: cosmetic, best effort, may be omitted

#### **FINISH**

as machined

### **KELSUS INTERCONTINENTAL - FITMENT PROTOTYPE KIT**

SHEET 7/7 PART: CROWN (PROTOTYPE) FILE: x06\_crown\_proto.step MATERIAL: Aluminum 6061 or 303/316 stainless QTY: 1

GENERAL: dims in mm. Geometry per attached STEP (master). Untoleranced machined dims  $\pm 0.05$ . Break sharp edges R0.1 unless noted. Engravings are cosmetic: best effort, do not quote polishing/filling.