
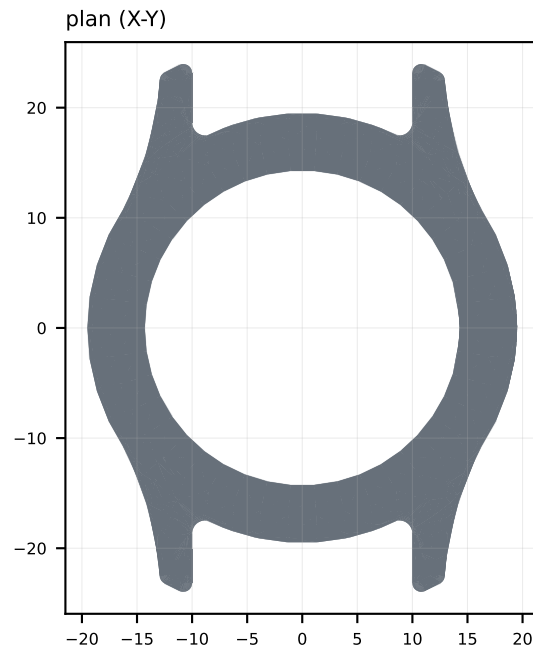


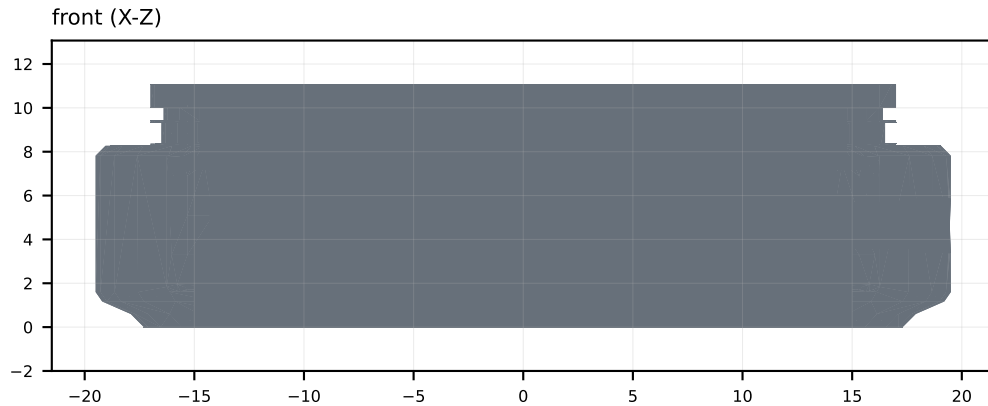

CASEBACK THREAD

M30 x 1.0 - 6H internal, full depth z 0-3.5 (PROTOTYPE substitution for the design's M30 x 0.5; mate with x04 external thread)

CRYSTAL BORE

Ø32.00 H7, seat depth per STEP

CASE BORE

Ø28.60 H8

DIAL POCKET

Ø31.30 +0.05/-0

CROWN / TUBE BORE

Ø2.48 H7 through flank at z 4.62 from back plane; inner Ø2.00 stem clearance per STEP

SPRING-BAR HOLES

Ø1.35 ±0.05 thru, both lugs, 90° csk to Ø1.65 both faces; position ±0.05

DETENT BALL POCKET

Ø0.65 pocket in shoulder: best effort, may be omitted on prototype

CRITICALS

case Ø39.00 ±0.05; lug gap 20.00 +0.15/-0; lug-to-lug 47.90 ±0.10

FINISH


as machined or light bead blast; no polishing

KELSUS INTERCONTINENTAL - FITMENT PROTOTYPE KIT

SHEET 1/7 PART: MIDCASE FILE: x01_midcase.step MATERIAL: Aluminum 6061-T6 (round 2: 316L) QTY: 1

GENERAL: dims in mm. Geometry per attached STEP (master). Untoleranced machined dims ±0.05. Break sharp edges R0.1 unless noted. Engravings are cosmetic: best effort, do not quote polishing/filling.

front (X-Z)

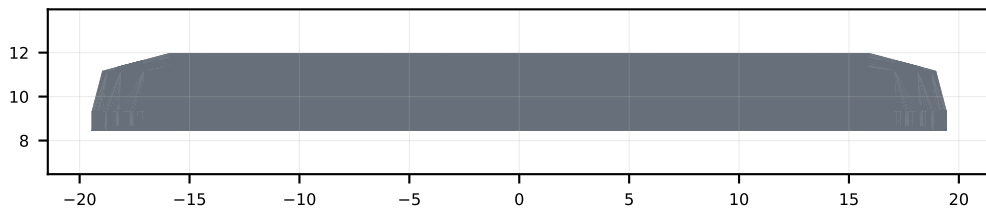

BORE

Ø34.10 H8 (rotates on case boss Ø34.00)

INTERNAL GROOVE

per STEP (Ø34.70 x 0.70) - spring ring omitted on prototype, groove still required

NUMERALS / TRIANGLES

engraved 0.25 deep: cosmetic, best effort, no lacquer fill

UNDERSIDE SCALLOPS

120 x R0.50 x 0.18 deep: cosmetic on prototype, may be omitted


COIN EDGE

per STEP; best effort

FINISH

as machined

plan (X-Y)

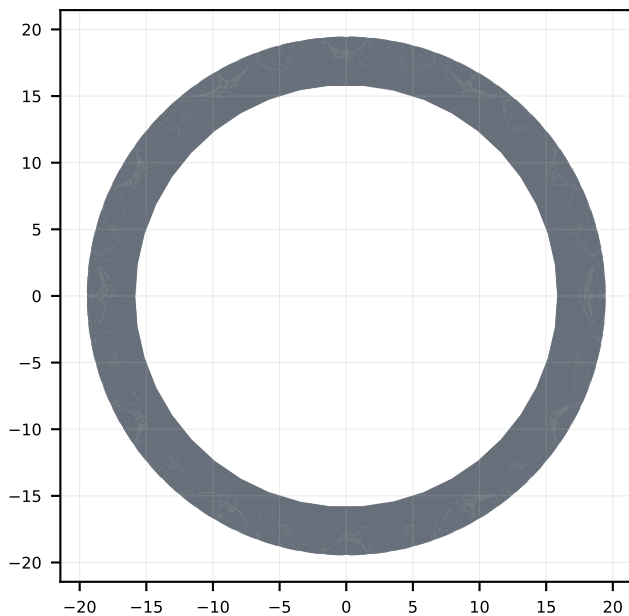


KELSUS INTERCONTINENTAL - FITMENT PROTOTYPE KIT

SHEET 2/7 PART: BEZEL 24H FILE: x02_bezel.step MATERIAL: Aluminum 6061-T6 QTY: 1

GENERAL: dims in mm. Geometry per attached STEP (master). Untoleranced machined dims ± 0.05 . Break sharp edges R0.1 unless noted. Engravings are cosmetic: best effort, do not quote polishing/filling.

front (X-Z)

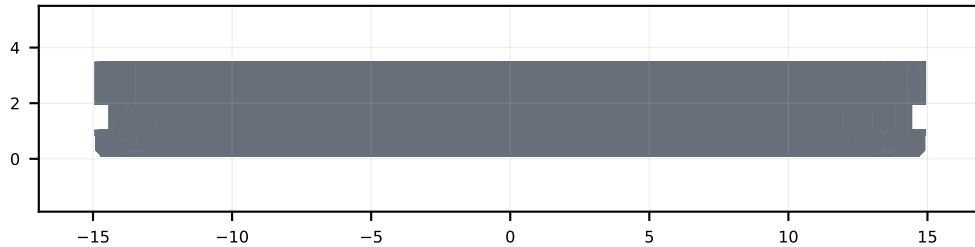

THREAD

M30 x 1.0 - 6g external on Ø30 band (PROTOTYPE substitution for M30 x 0.5; mate with x01 internal thread)

O-RING GROOVE

on OD per STEP: retain (gasket not fitted on prototype)

WINDOW POCKET

Ø23.42 +0.05/-0 x 1.40 deep, internal retaining ledge per STEP (mates x05 acrylic window)

WRENCH NOTCHES

6x per STEP


ENGRAVING

KELSUS INTERCONTINENTAL, 0.18 deep: cosmetic, best effort

FINISH

as machined


plan (X-Y)

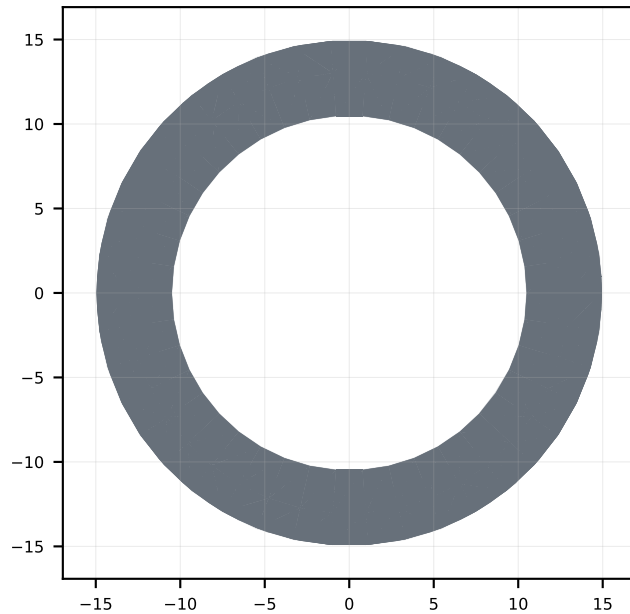

KELSUS INTERCONTINENTAL - FITMENT PROTOTYPE KIT

SHEET 3/7 PART: CASEBACK RING FILE: x04_caseback.step MATERIAL: Aluminum 6061-T6 (round 2: 316L) QTY: 1

GENERAL: dims in mm. Geometry per attached STEP (master). Untoleranced machined dims ± 0.05 . Break sharp edges R0.1 unless noted. Engravings are cosmetic: best effort, do not quote polishing/filling.

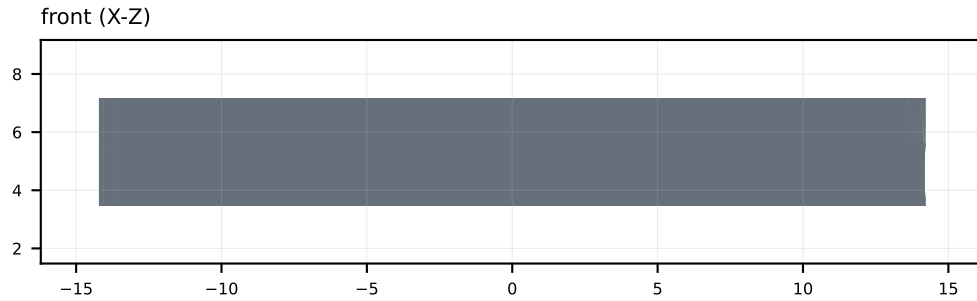

MOVEMENT REGISTER

Ø25.60 Js8 - CRITICAL, this locates the Miyota 9075

FLANGE SEAT

Ø26.00 relief per STEP

OD


Ø28.43 (slips into case bore Ø28.60 H8)

STEM SLOT

per STEP, aligns with case tube bore

FINISH


as machined

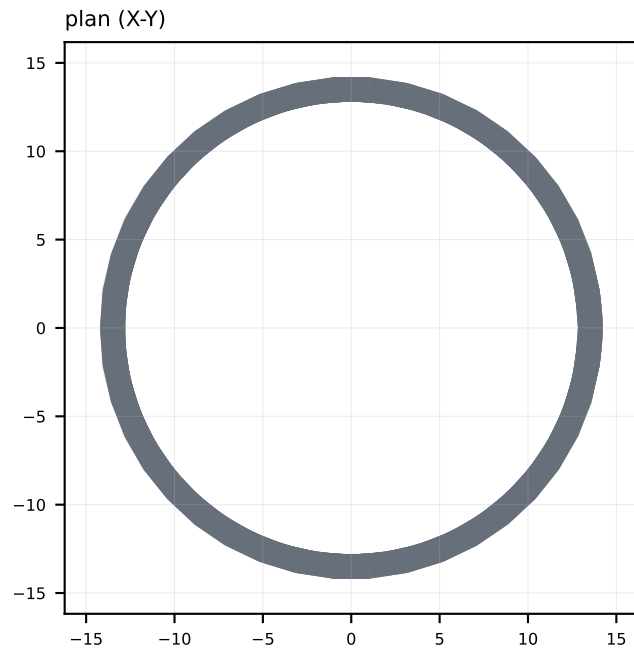

KELSUS INTERCONTINENTAL - FITMENT PROTOTYPE KIT

SHEET 4/7 PART: MOVEMENT RING FILE: x08_movement_ring.step MATERIAL: Acetal / Delrin (POM), white or black QTY: 1

GENERAL: dims in mm. Geometry per attached STEP (master). Untoleranced machined dims ± 0.05 . Break sharp edges R0.1 unless noted. Engravings are cosmetic: best effort, do not quote polishing/filling.

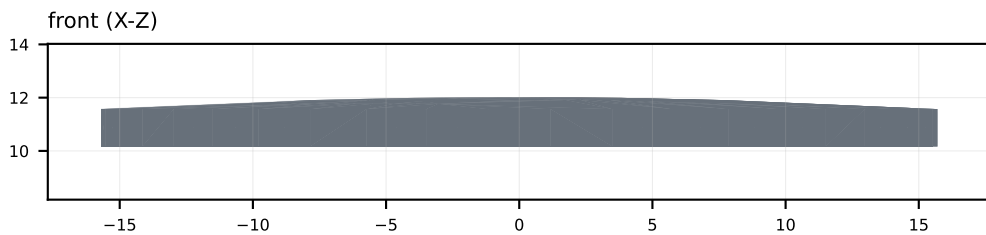

OD


Ø31.40 -0.05 (design uses a gasket; prototype is a slip fit into Ø32.00 bore, retained with adhesive by customer)

PROFILE

flat-top dome per STEP

FINISH


machine finish acceptable; vapor polish if offered

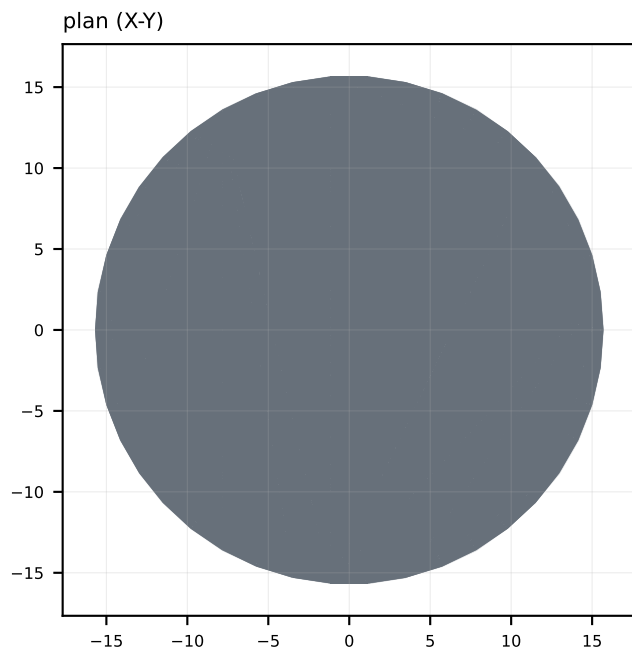

KELSUS INTERCONTINENTAL - FITMENT PROTOTYPE KIT

SHEET 5/7 PART: CRYSTAL (PROTOTYPE) FILE: x03_crystal_acrylic.step MATERIAL: Acrylic PMMA, clear QTY: 1

GENERAL: dims in mm. Geometry per attached STEP (master). Untoleranced machined dims ± 0.05 . Break sharp edges R0.1 unless noted. Engravings are cosmetic: best effort, do not quote polishing/filling.

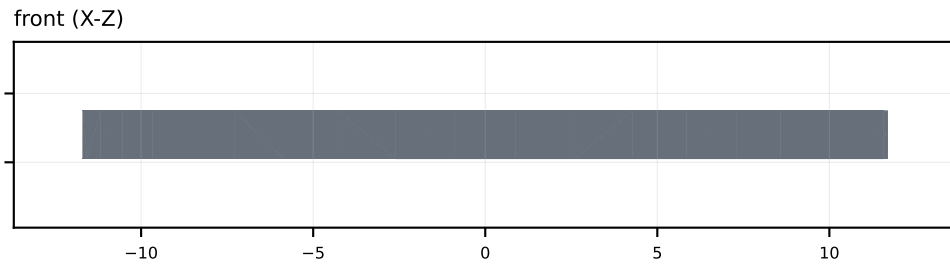


DISC

Ø23.40 -0.05 x 1.40 (slip into x04 pocket, customer retains with adhesive)

FINISH

machine finish acceptable

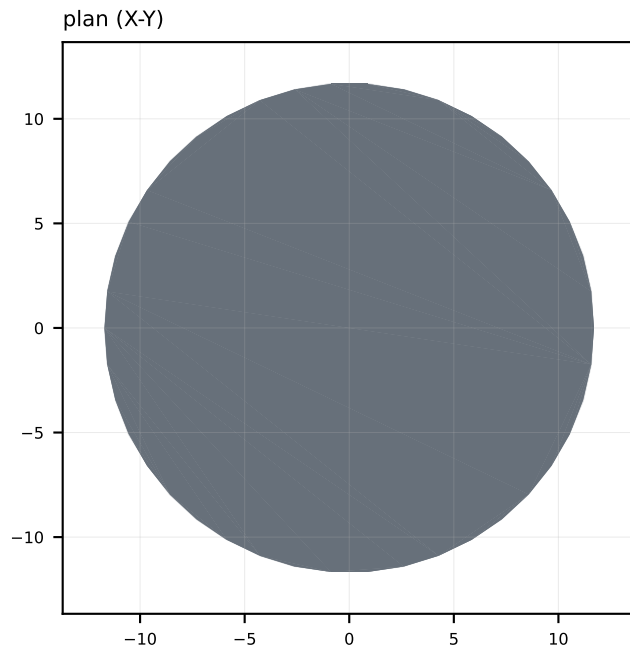


KELSUS INTERCONTINENTAL - FITMENT PROTOTYPE KIT


SHEET 6/7 PART: EXHIBITION WINDOW (PROTOTYPE) FILE: x05_window_acrylic.step MATERIAL: Acrylic PMMA, clear QTY: 1

GENERAL: dims in mm. Geometry per attached STEP (master). Untoleranced machined dims ± 0.05 . Break sharp edges R0.1 unless noted. Engravings are cosmetic: best effort, do not quote polishing/filling.

front (X-Z)

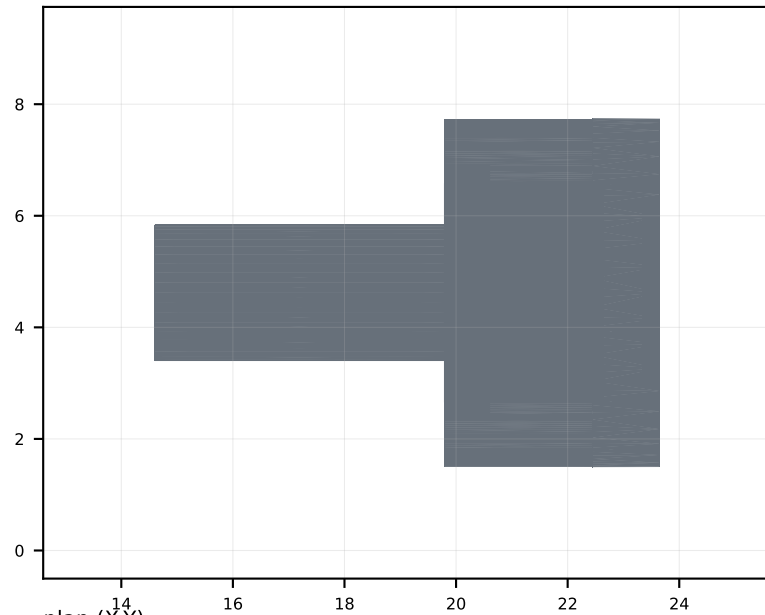

plan (X-Y)

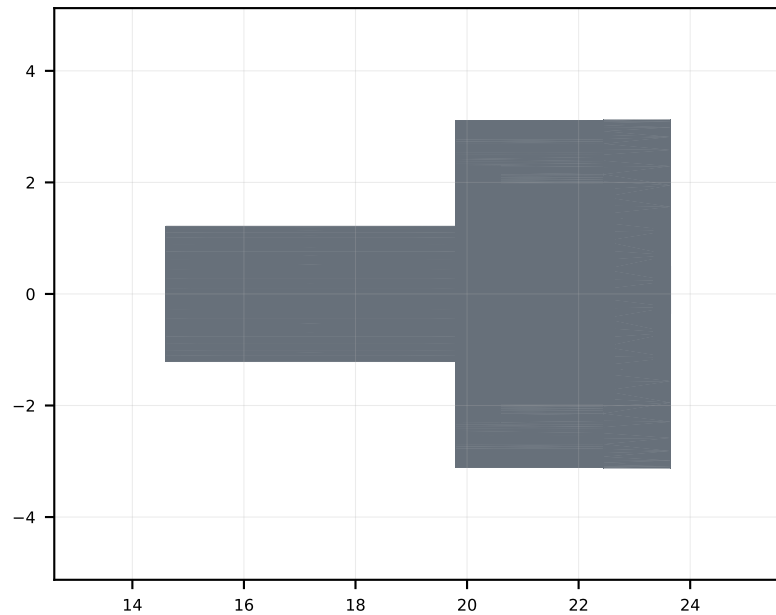

PIN

Ø2.44 -0.02 x 5.2 long, integral (slips into case tube bore Ø2.48 H7; friction fit, removable). PROTOTYPE substitution for the threaded crown + tube.

BODY

Ø6.25 x 3.85 per STEP; coin edge best effort

K LOGO ON END FACE

engraved: cosmetic, best effort, may be omitted

FINISH

as machined

KELSUS INTERCONTINENTAL - FITMENT PROTOTYPE KIT

SHEET 7/7 PART: CROWN (PROTOTYPE) FILE: x06_crown_proto.step MATERIAL: Aluminum 6061 or 303/316 stainless QTY: 1

GENERAL: dims in mm. Geometry per attached STEP (master). Untoleranced machined dims ± 0.05 . Break sharp edges R0.1 unless noted. Engravings are cosmetic: best effort, do not quote polishing/filling.