Atividade 09 - Sistemas Operacionais de Redes 2
Nome: Kelvin de Lima Rodrigues
Turma: P8 de Informática
Etapa 1

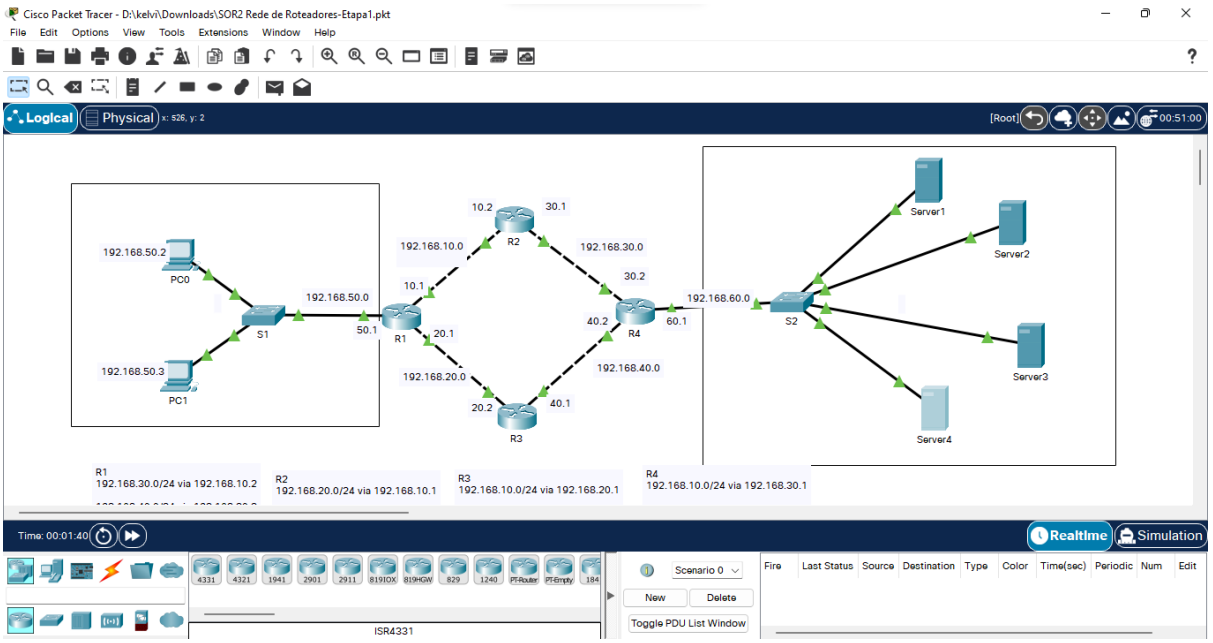

Etapa 2 - Configurando as interfaces dos roteadores

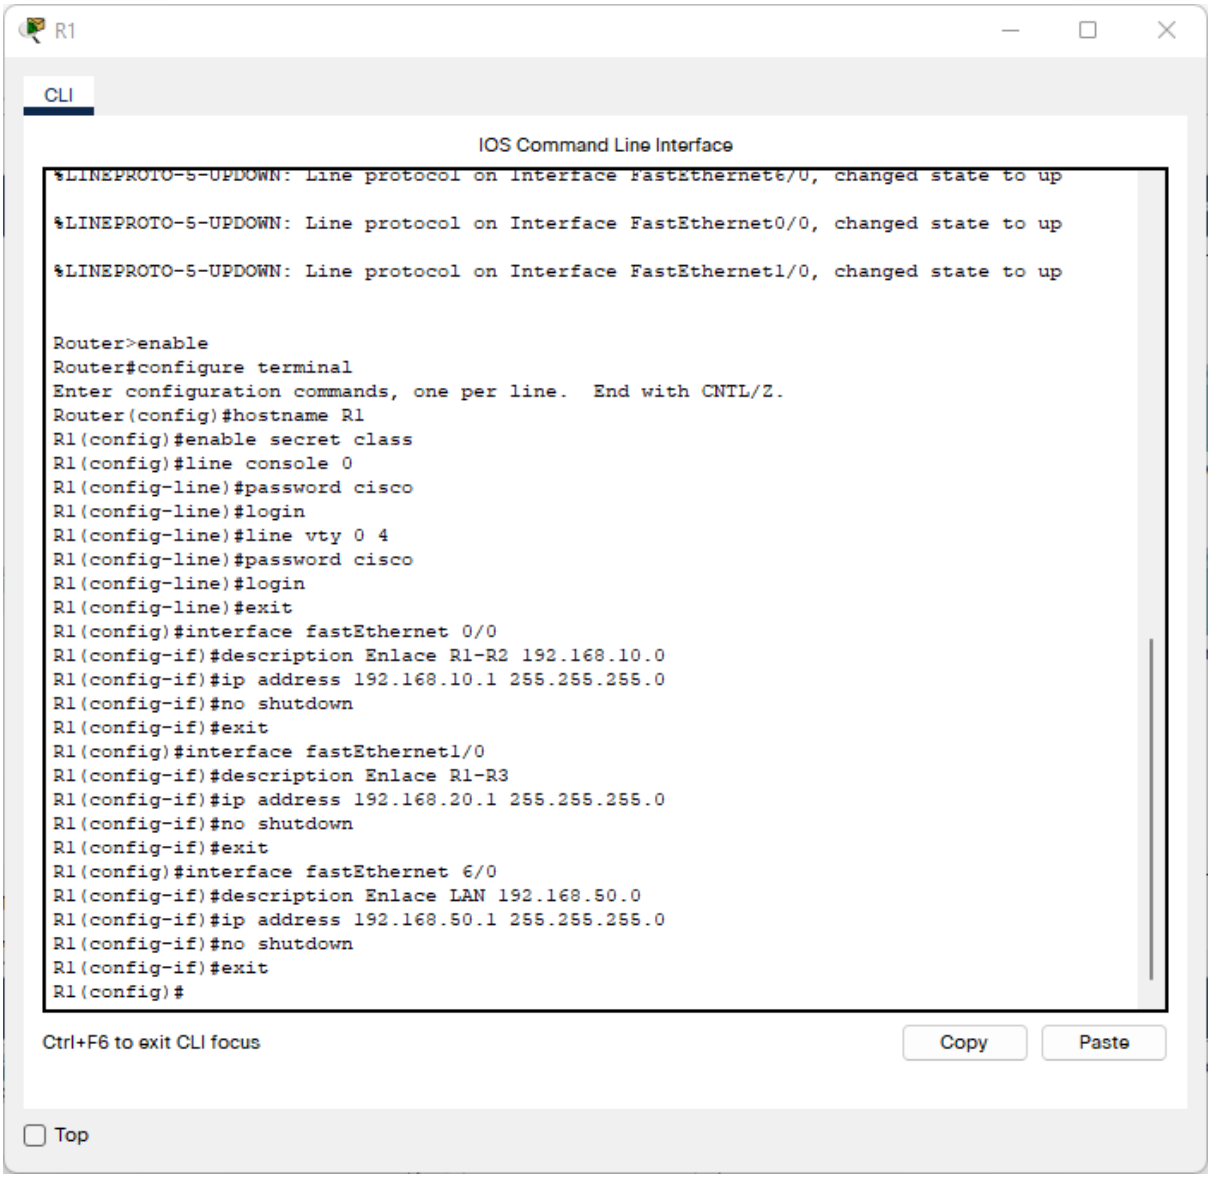

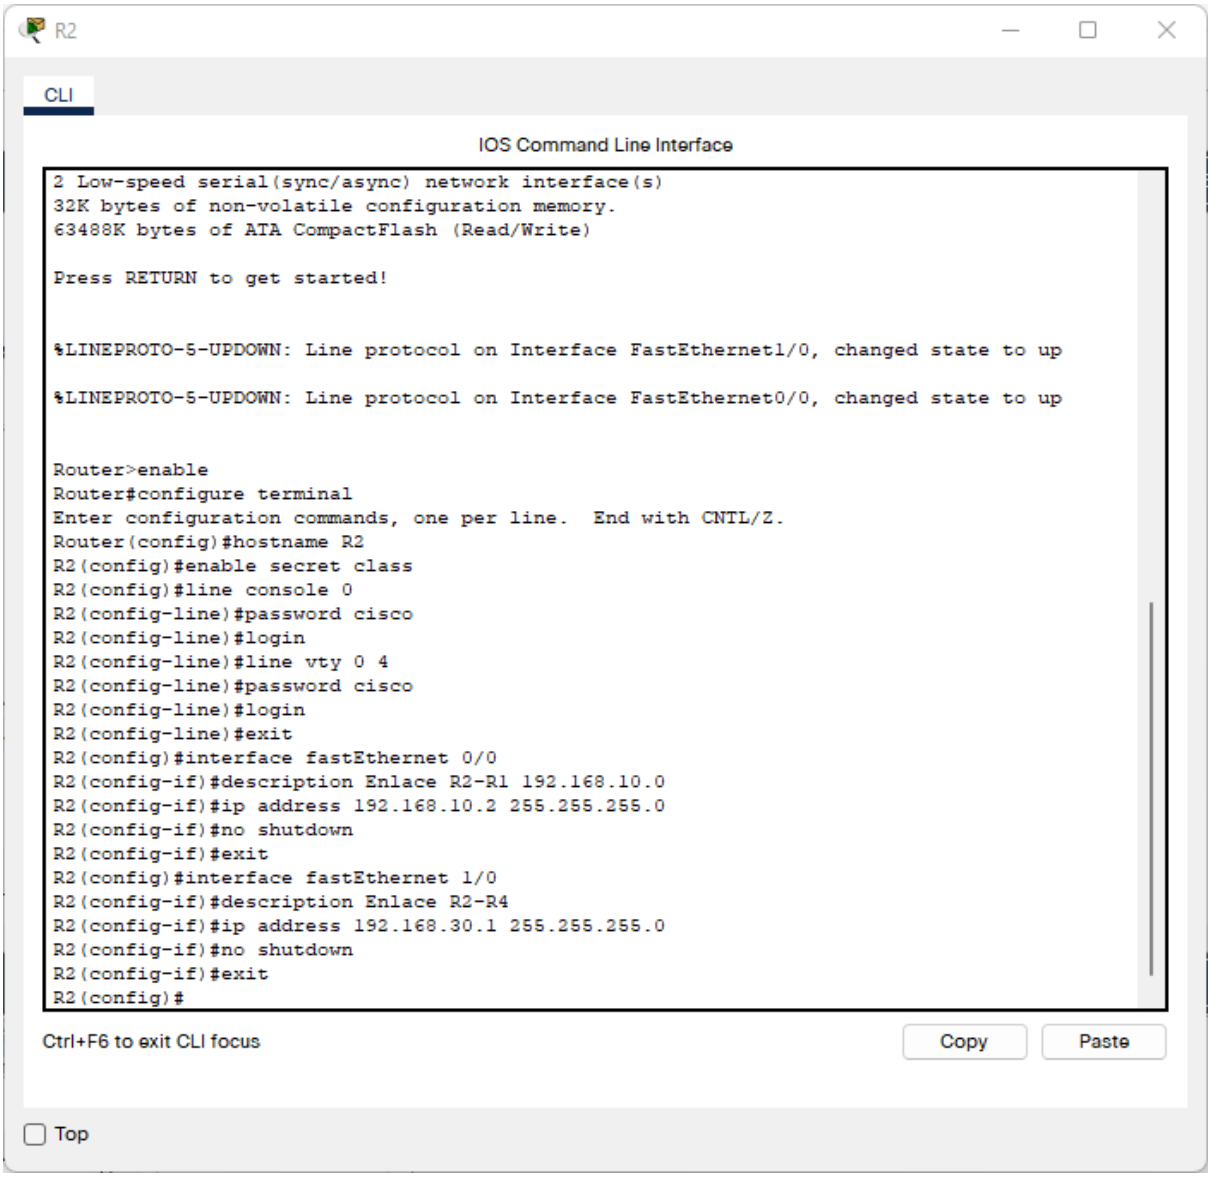
R2
CLI
IOS Command Line Interface
2 Low-speed serial(sync/async) network interface(s)
32K bytes of non-volatile configuration memory.
63488K bytes of ATA CompactFlash (Read/Write)
Press RETURN to get started!
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname R2
R2(config)#enable secret class
R2(config)#line console 0
R2(config-line)#password cisco
R2(config-line)#login
R2(config-line)#line vty 0 4
R2(config-line)#password cisco
R2(config-line)#login
R2(config-line)#exit
R2(config)#interface fastEthernet 0/0
R2(config-if)#description Enlace R2-R1 192.168.10.0
R2(config-if)#ip address 192.168.10.2 255.255.255.0
R2(config-if)#no shutdown
R2(config-if)#exit
R2(config)#interface fastEthernet 1/0
R2(config-if)#description Enlace R2-R4
R2(config-if)#ip address 192.168.30.1 255.255.255.0
R2(config-if)#no shutdown
R2(config-if)#exit
R2(config)#
Ctrl+F6 to exit CLI focus
Copy
Paste
Top

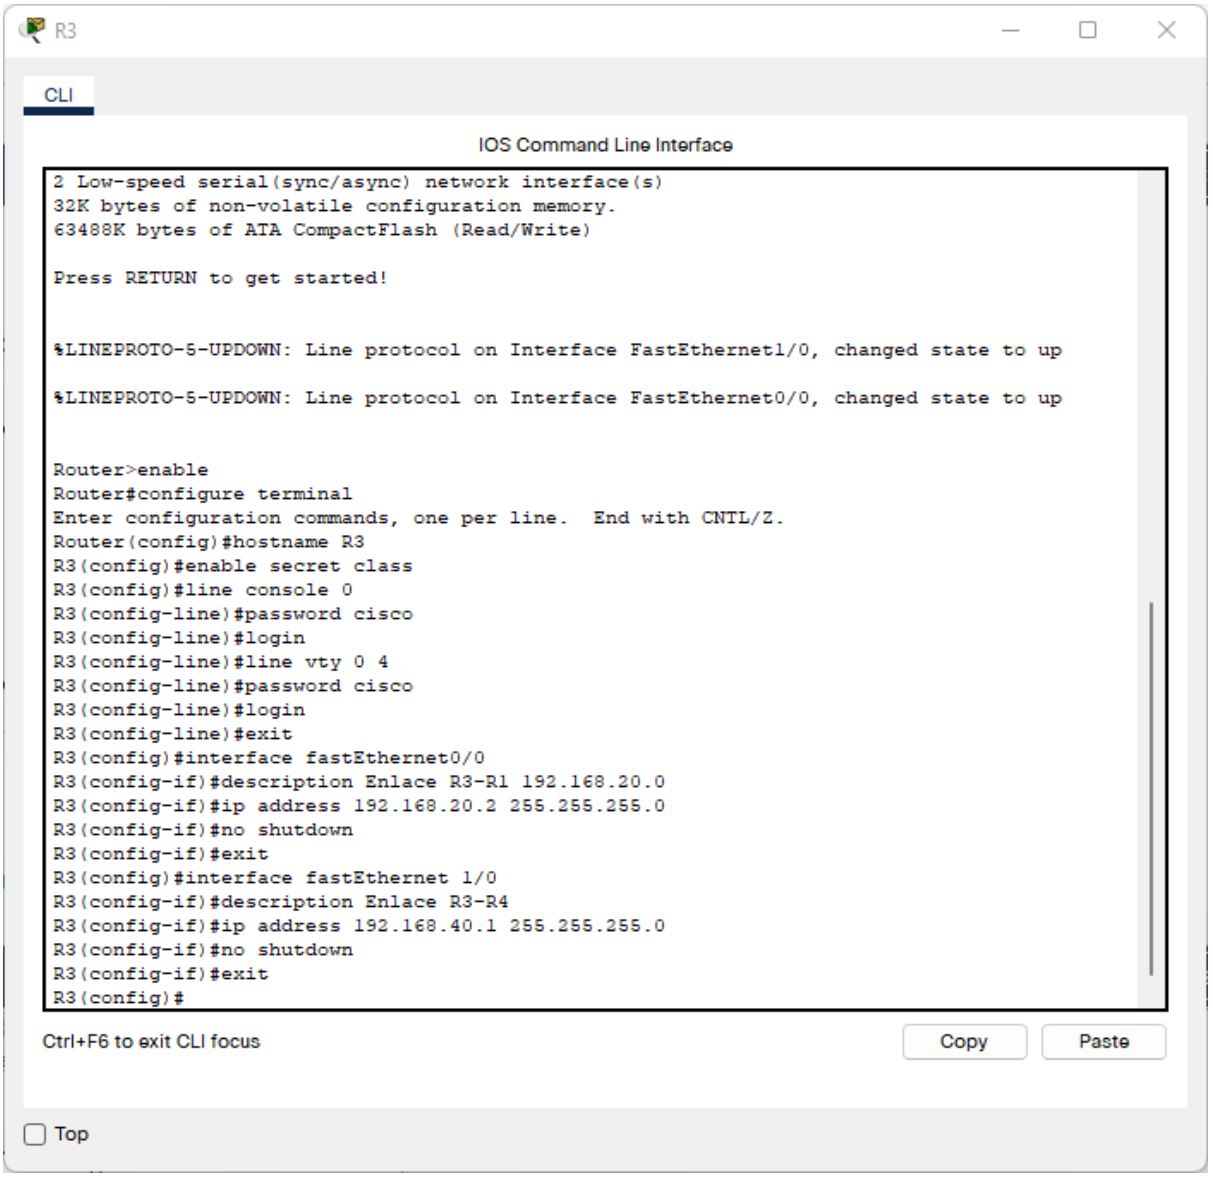
R3
CLI
IOS Command Line Interface
2 Low-speed serial(sync/async) network interface(s)
32K bytes of non-volatile configuration memory.
63488K bytes of ATA CompactFlash (Read/Write)
Press RETURN to get started!
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname R3
R3(config)#enable secret class
R3(config)#line console 0
R3(config-line)#password cisco
R3(config-line)#login
R3(config-line)#line vty 0 4
R3(config-line)#password cisco
R3(config-line)#login
R3(config-line)#exit
R3(config)#interface fastEthernet0/0
R3(config-if)#description Enlace R3-R1 192.168.20.0
R3(config-if)#ip address 192.168.20.2 255.255.255.0
R3(config-if)#no shutdown
R3(config-if)#exit
R3(config)#interface fastEthernet 1/0
R3(config-if)#description Enlace R3-R4
R3(config-if)#ip address 192.168.40.1 255.255.255.0
R3(config-if)#no shutdown
R3(config-if)#exit
R3(config)#
Ctrl+F6 to exit CLI focus
Copy
Paste
Top

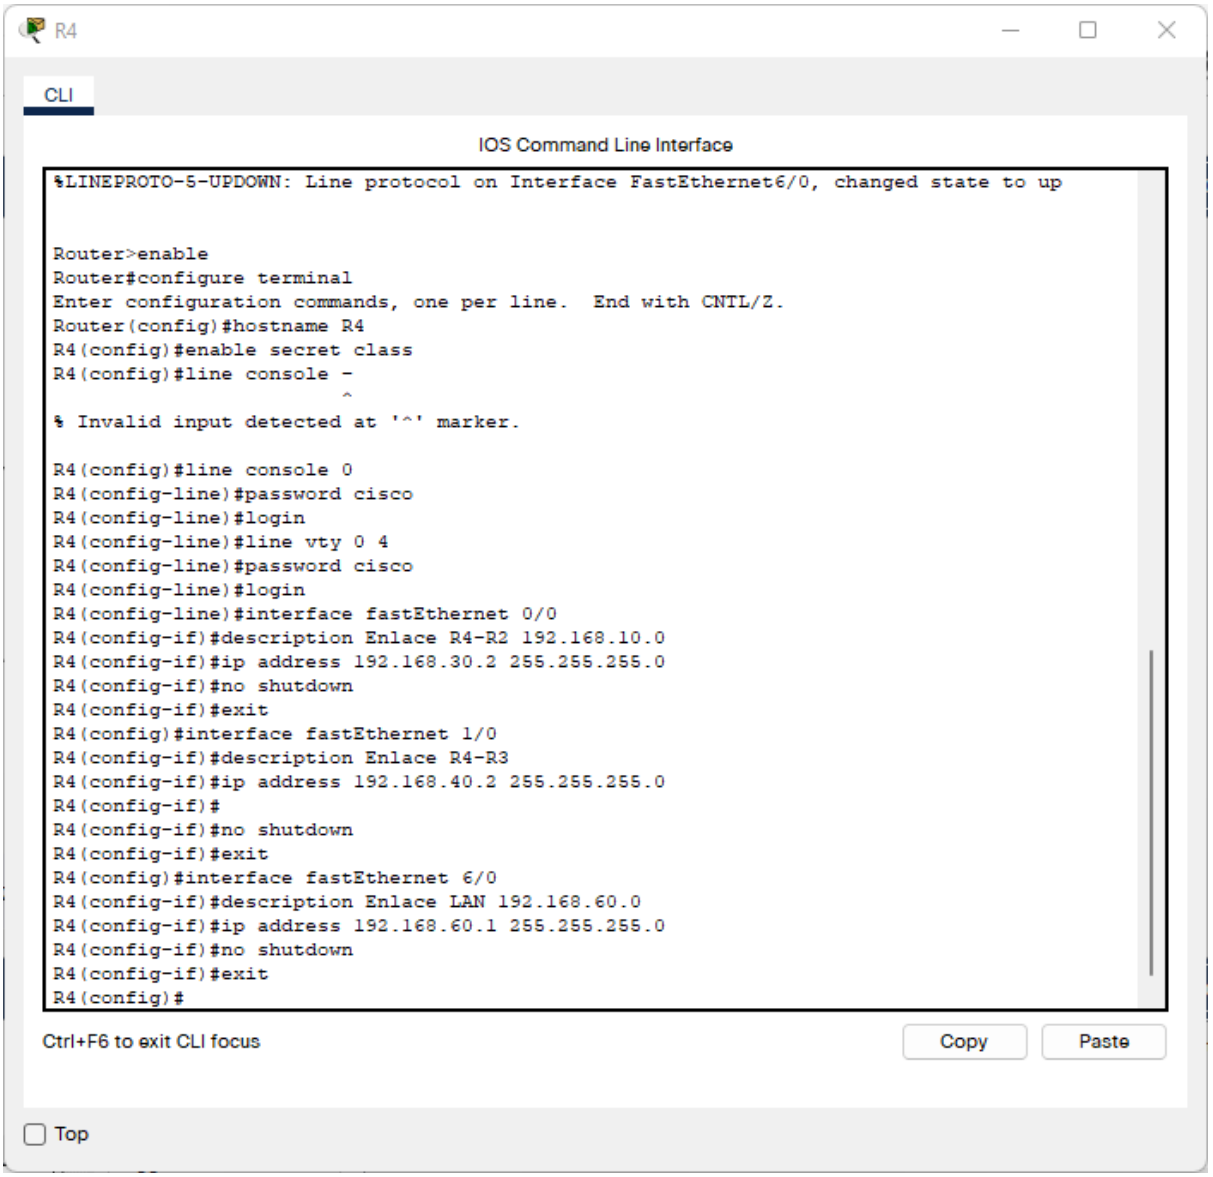
R4
CLI
IOS Command Line Interface
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet6/0, changed state to up
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname R4
R4(config)#enable secret class
R4(config)#line console -
^
% Invalid input detected at '^' marker.
R4(config)#line console 0
R4(config-line)#password cisco
R4(config-line)#login
R4(config-line)#line vty 0 4
R4(config-line)#password cisco
R4(config-line)#login
R4(config-line)#interface fastEthernet 0/0
R4(config-if)#description Enlace R4-R2 192.168.10.0
R4(config-if)#ip address 192.168.30.2 255.255.255.0
R4(config-if)#no shutdown
R4(config-if)#exit
R4(config)#interface fastEthernet 1/0
R4(config-if)#description Enlace R4-R3
R4(config-if)#ip address 192.168.40.2 255.255.255.0
R4(config-if)#
R4(config-if)#no shutdown
R4(config-if)#exit
R4(config)#interface fastEthernet 6/0
R4(config-if)#description Enlace LAN 192.168.60.0
R4(config-if)#ip address 192.168.60.1 255.255.255.0
R4(config-if)#no shutdown
R4(config-if)#exit
R4(config)#
Ctrl+F6 to exit CLI focus
Copy
Paste
Top

Etapa 3 - Configurando as rotas dos roteadores

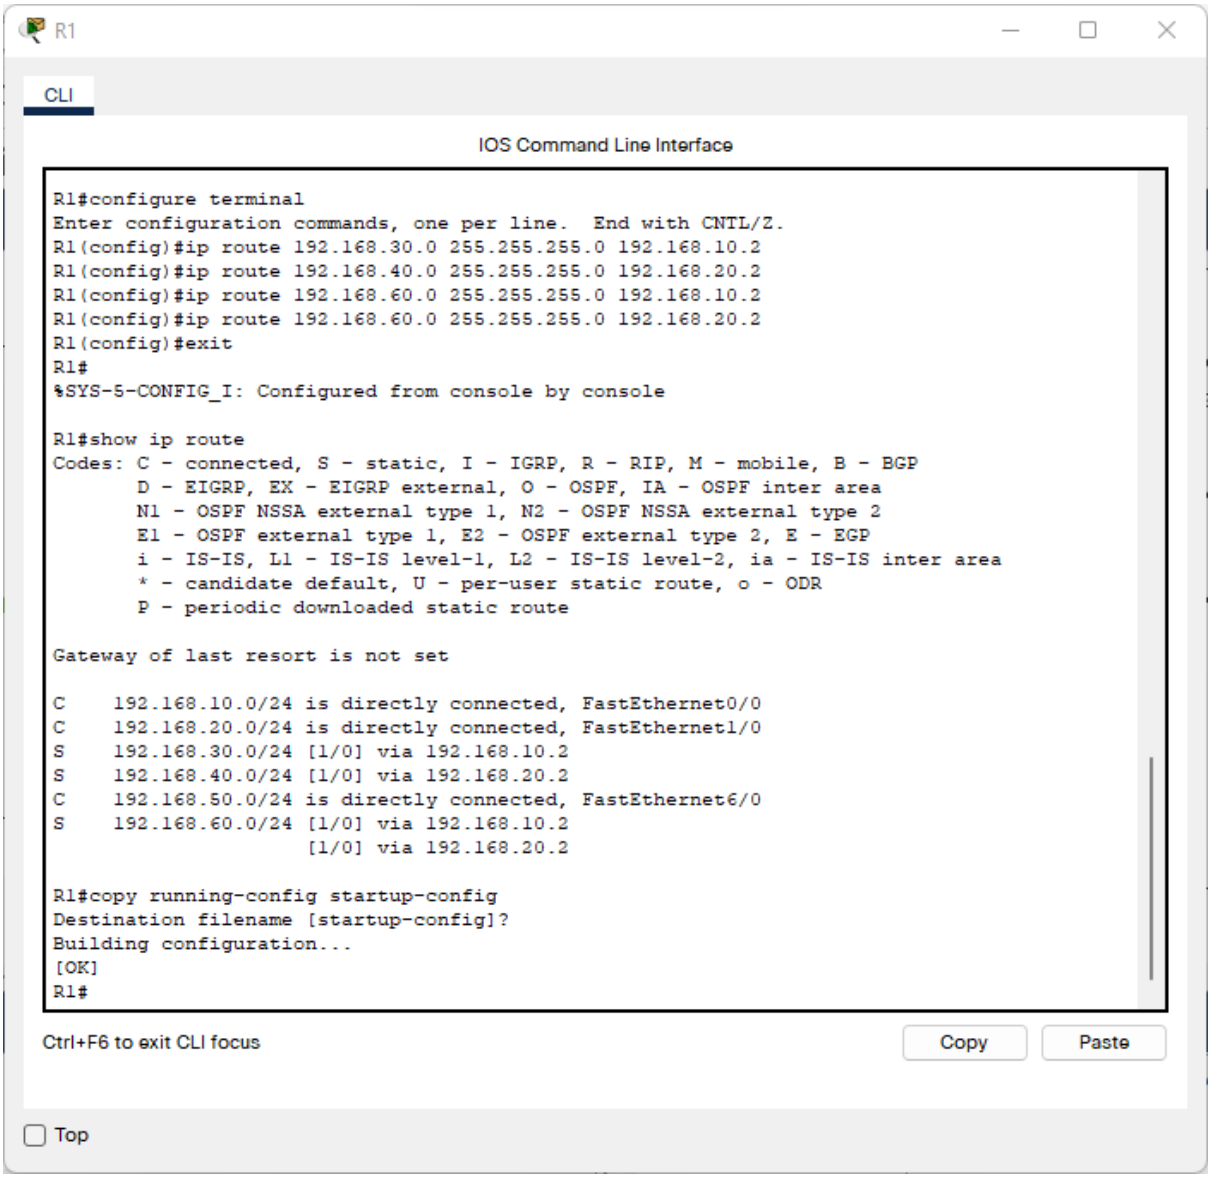

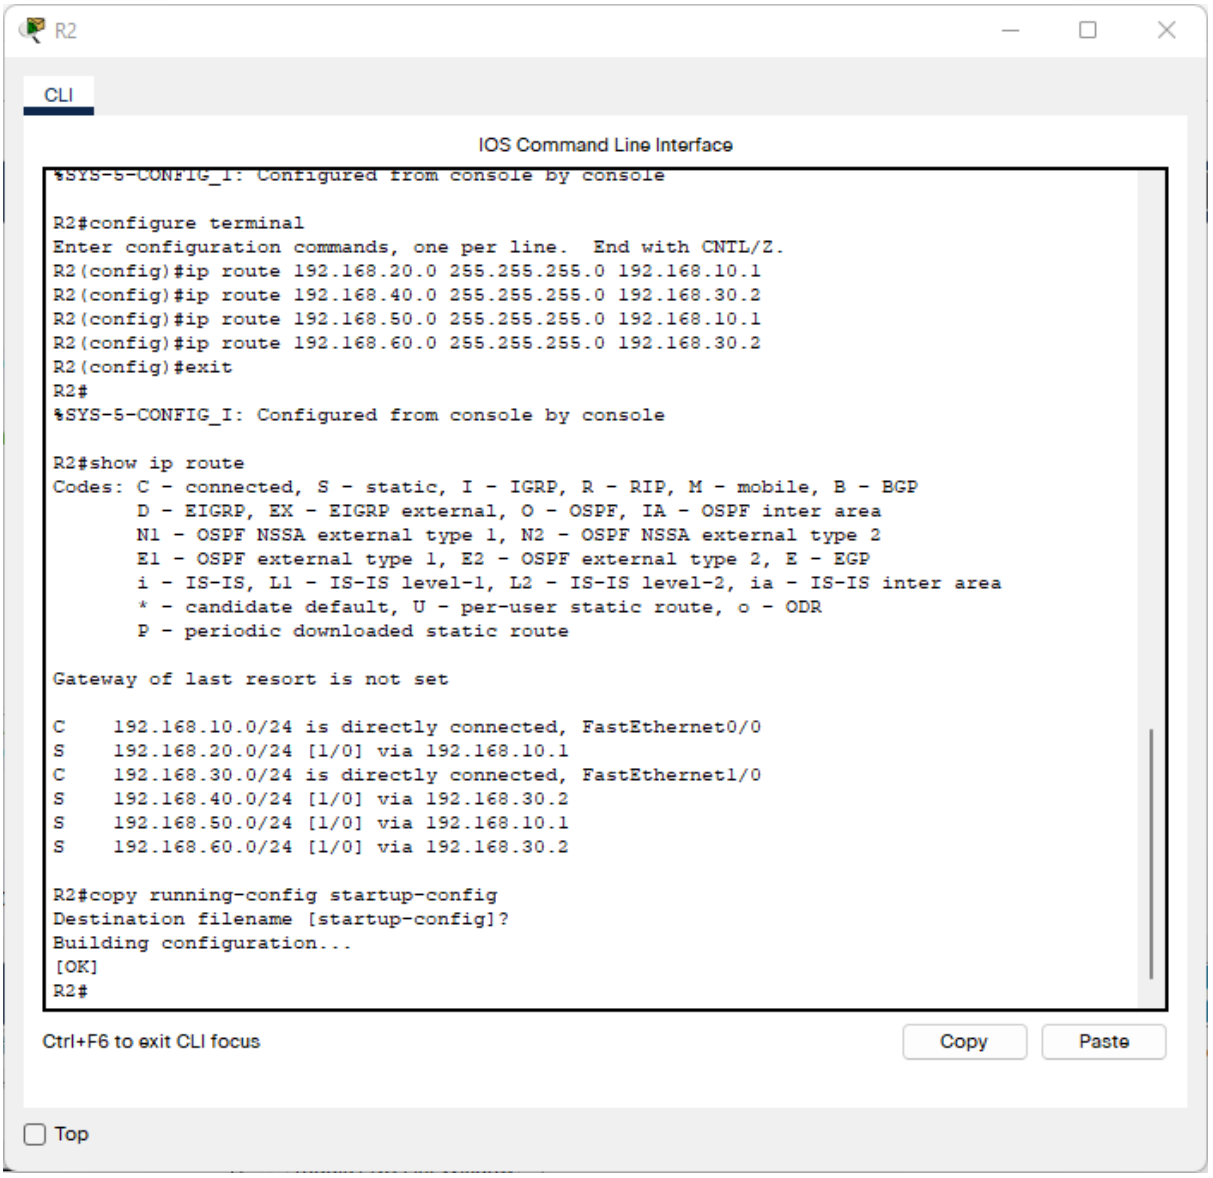
R2
CLI
IOS Command Line Interface
%SYS-5-CONFIG_I: Configured from console by console
R2#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
R2(config)#ip route 192.168.20.0 255.255.255.0 192.168.10.1
R2(config)#ip route 192.168.40.0 255.255.255.0 192.168.30.2
R2(config)#ip route 192.168.50.0 255.255.255.0 192.168.10.1
R2(config)#ip route 192.168.60.0 255.255.255.0 192.168.30.2
R2(config)#exit
R2#
%SYS-5-CONFIG_I: Configured from console by console
R2#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
Gateway of last resort is not set
C 192.168.10.0/24 is directly connected, FastEthernet0/0
S 192.168.20.0/24 [1/0] via 192.168.10.1
C 192.168.30.0/24 is directly connected, FastEthernet1/0
S 192.168.40.0/24 [1/0] via 192.168.30.2
S 192.168.50.0/24 [1/0] via 192.168.10.1
S 192.168.60.0/24 [1/0] via 192.168.30.2
R2#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
R2#
Ctrl+F6 to exit CLI focus
Copy
Paste
Top

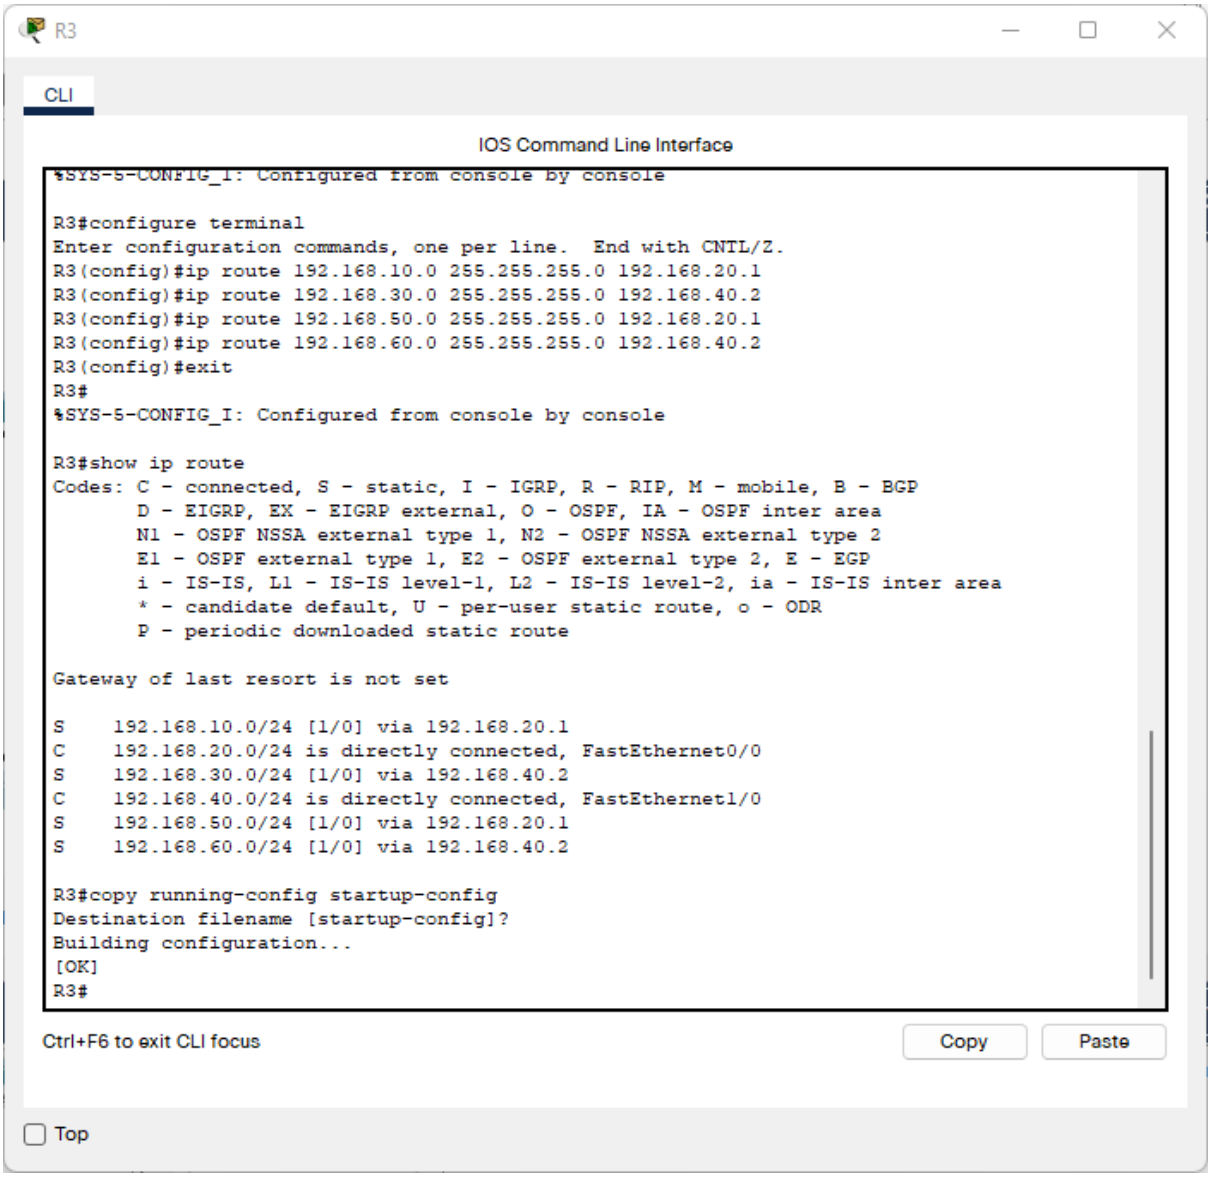
R3
CLI
IOS Command Line Interface
%SYS-5-CONFIG_I: Configured from console by console
R3#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
R3(config)#ip route 192.168.10.0 255.255.255.0 192.168.20.1
R3(config)#ip route 192.168.30.0 255.255.255.0 192.168.40.2
R3(config)#ip route 192.168.50.0 255.255.255.0 192.168.20.1
R3(config)#ip route 192.168.60.0 255.255.255.0 192.168.40.2
R3(config)#exit
R3#
%SYS-5-CONFIG_I: Configured from console by console
R3#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
Gateway of last resort is not set
S 192.168.10.0/24 [1/0] via 192.168.20.1
C 192.168.20.0/24 is directly connected, FastEthernet0/0
S 192.168.30.0/24 [1/0] via 192.168.40.2
C 192.168.40.0/24 is directly connected, FastEthernet1/0
S 192.168.50.0/24 [1/0] via 192.168.20.1
S 192.168.60.0/24 [1/0] via 192.168.40.2
R3#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
R3#
Ctrl+F6 to exit CLI focus
Copy
Paste
Top

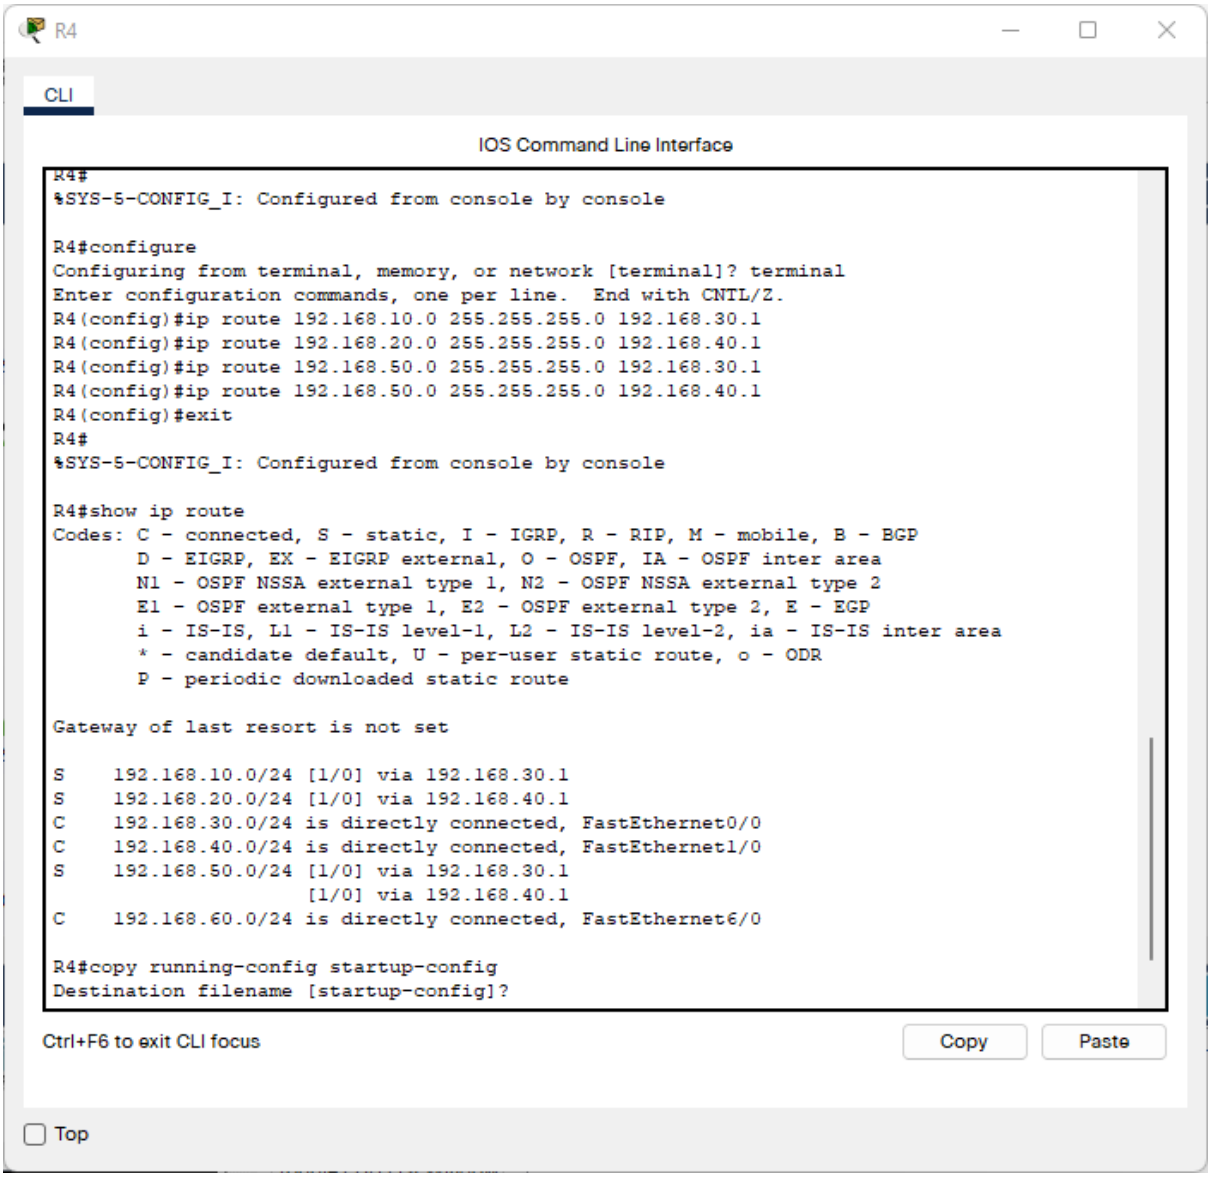
R4
CLI
IOS Command Line Interface
R4#
%SYS-5-CONFIG_I: Configured from console by console
R4#configure
Configuring from terminal, memory, or network [terminal]? terminal
Enter configuration commands, one per line. End with CNTL/Z.
R4(config)#ip route 192.168.10.0 255.255.255.0 192.168.30.1
R4(config)#ip route 192.168.20.0 255.255.255.0 192.168.40.1
R4(config)#ip route 192.168.50.0 255.255.255.0 192.168.30.1
R4(config)#ip route 192.168.50.0 255.255.255.0 192.168.40.1
R4(config)#exit
R4#
%SYS-5-CONFIG_I: Configured from console by console
R4#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
Gateway of last resort is not set
S 192.168.10.0/24 [1/0] via 192.168.30.1
S 192.168.20.0/24 [1/0] via 192.168.40.1
C 192.168.30.0/24 is directly connected, FastEthernet0/0
C 192.168.40.0/24 is directly connected, FastEthernet1/0
S 192.168.50.0/24 [1/0] via 192.168.30.1
[1/0] via 192.168.40.1
C 192.168.60.0/24 is directly connected, FastEthernet6/0
R4#copy running-config startup-config
Destination filename [startup-config]?
Ctrl+F6 to exit CLI focus
Copy
Paste
Top

Testando a conexão

PC1

Desktop | Programming

Command Prompt

```
C:\>ping 192.168.50.1

Pinging 192.168.50.1 with 32 bytes of data:

Reply from 192.168.50.1: bytes=32 time<1ms TTL=255
Reply from 192.168.50.1: bytes=32 time=4ms TTL=255
Reply from 192.168.50.1: bytes=32 time=5ms TTL=255
Reply from 192.168.50.1: bytes=32 time=4ms TTL=255

Ping statistics for 192.168.50.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 5ms, Average = 3ms

C:\>ping  192.168.10.2

Pinging 192.168.10.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.10.2: bytes=32 time=23ms TTL=254
Reply from 192.168.10.2: bytes=32 time<1ms TTL=254
Reply from 192.168.10.2: bytes=32 time<1ms TTL=254

Ping statistics for 192.168.10.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 23ms, Average = 7ms

C:\>ping 192.168.20.2

Pinging 192.168.20.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.20.2: bytes=32 time=11ms TTL=254
Reply from 192.168.20.2: bytes=32 time=7ms TTL=254
Reply from 192.168.20.2: bytes=32 time<1ms TTL=254

Ping statistics for 192.168.20.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
```

Top

PC1

Desktop | Programming

Command Prompt

```
C:\>ping 192.168.40.2

Pinging 192.168.40.2 with 32 bytes of data:

Request timed out.
Request timed out.
Reply from 192.168.40.2: bytes=32 time<1ms TTL=253
Reply from 192.168.40.2: bytes=32 time<1ms TTL=253

Ping statistics for 192.168.40.2:
    Packets: Sent = 4, Received = 2, Lost = 2 (50% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.30.2

Pinging 192.168.30.2 with 32 bytes of data:

Reply from 192.168.30.2: bytes=32 time=4ms TTL=253
Reply from 192.168.30.2: bytes=32 time<1ms TTL=253
Reply from 192.168.30.2: bytes=32 time=20ms TTL=253
Reply from 192.168.30.2: bytes=32 time<1ms TTL=253

Ping statistics for 192.168.30.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 20ms, Average = 6ms

C:\>ping 192.168.60.2

Pinging 192.168.60.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.60.2: bytes=32 time<1ms TTL=125
Reply from 192.168.60.2: bytes=32 time=11ms TTL=125
Reply from 192.168.60.2: bytes=32 time<1ms TTL=125

Ping statistics for 192.168.60.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
```

Top

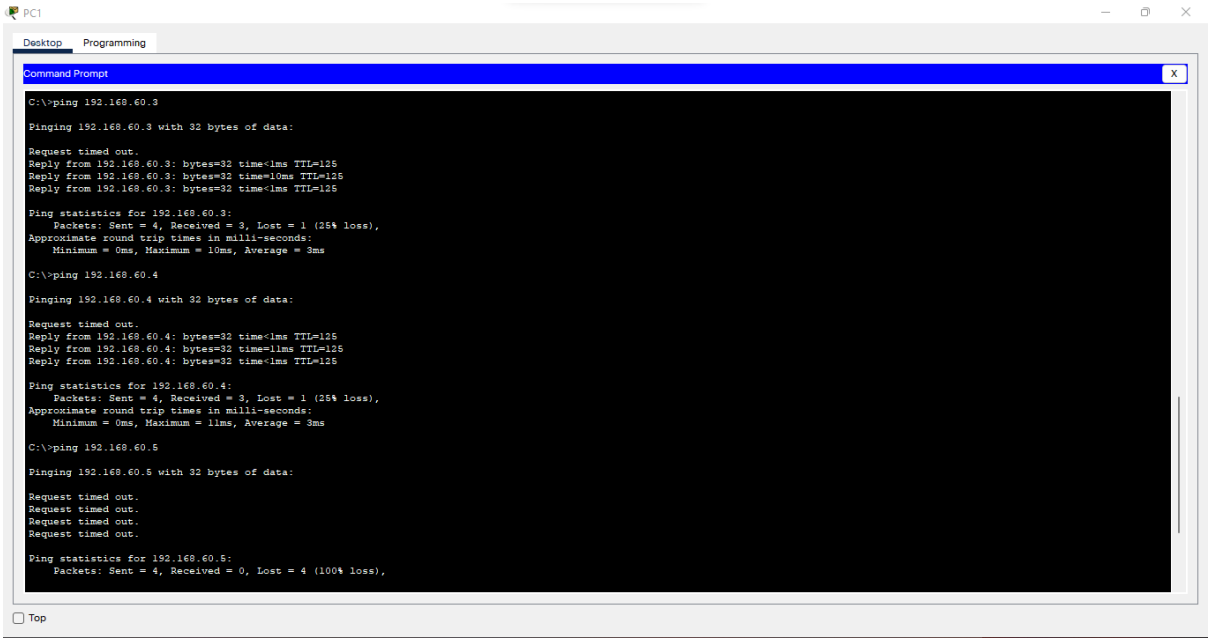

Etapa 4
Configurando DNS

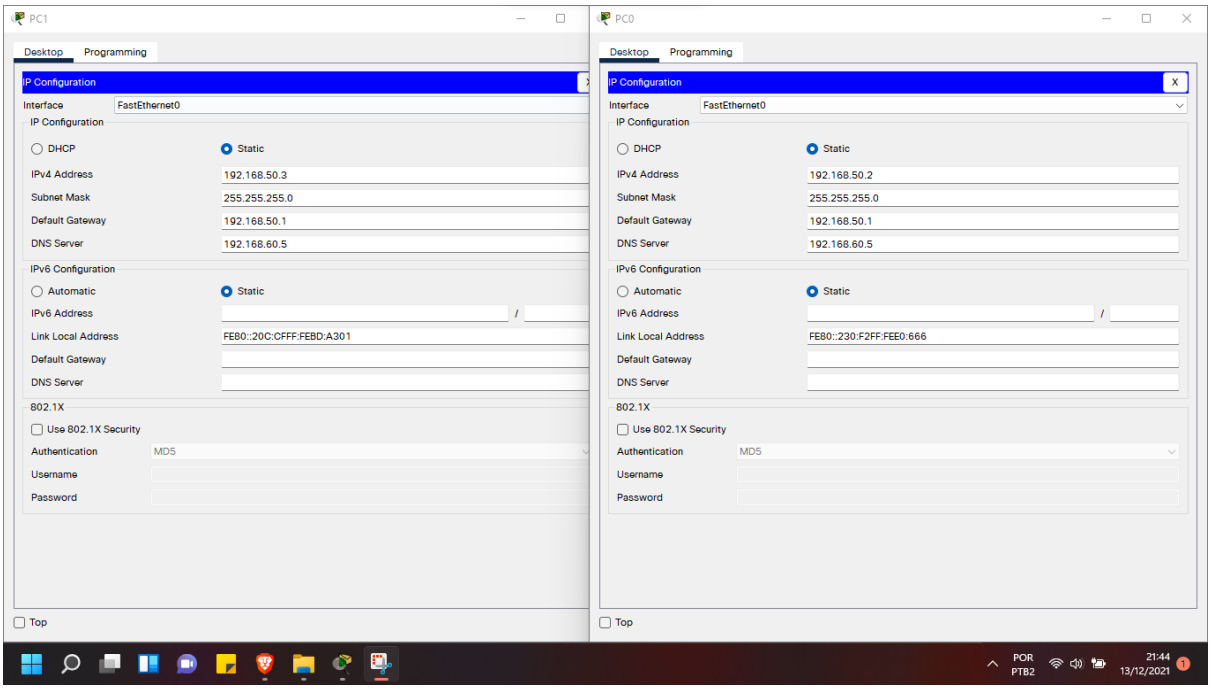

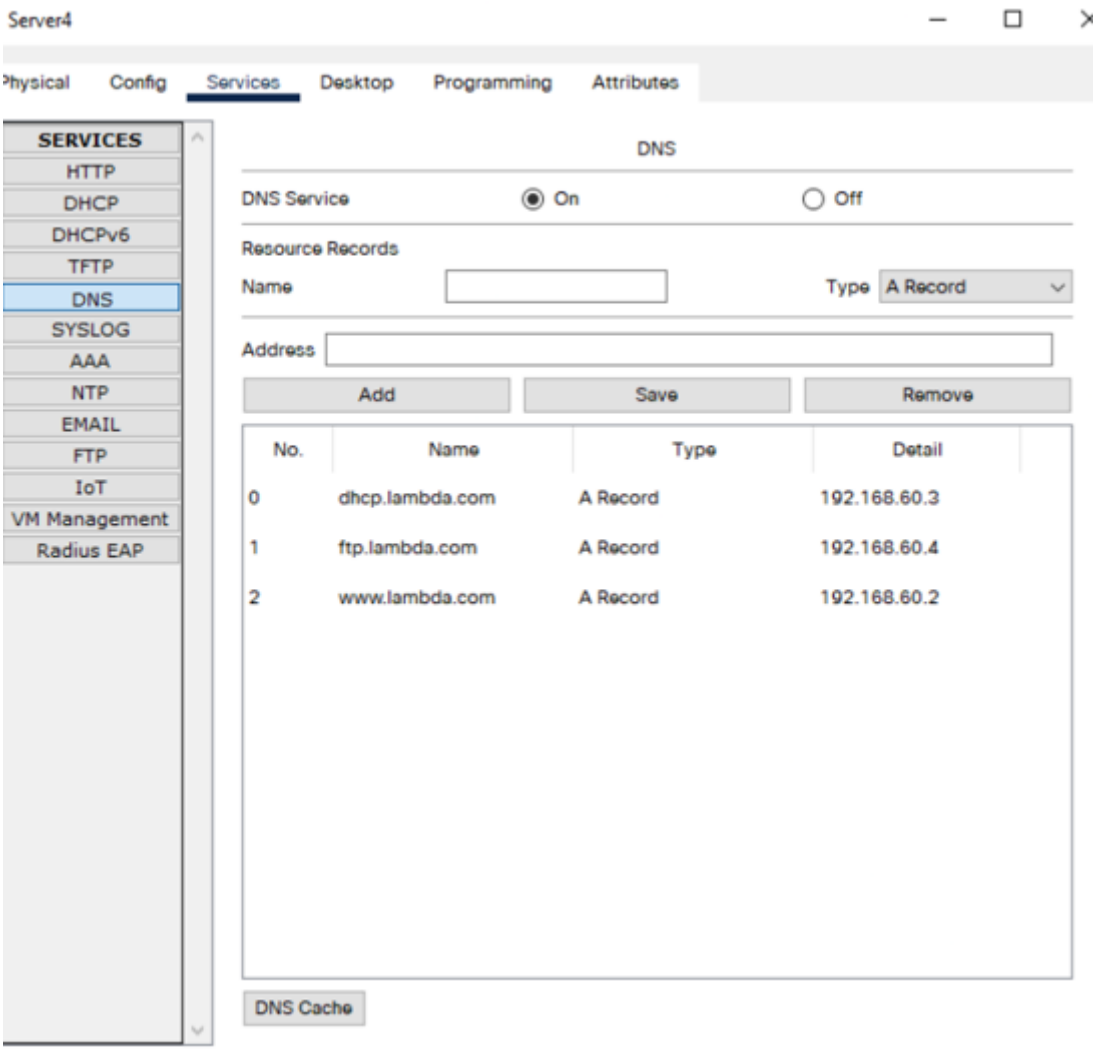
Server4
Physical
Config
Services
Desktop
Programming
Attributes
SERVICES
HTTP
DHCP
DHCPv6
TFTP
DNS
SYSLOG
AAA
NTP
EMAIL
FTP
IoT
VM Management
Radius EAP
DNS
DNS Service
On
Off
Resource Records
Name
Type
A Record
Address
Add
Save
Remove
No.
Name
Type
Detail
0
dhcp.lambda.com
A Record
192.168.60.3
1
ftp.lambda.com
A Record
192.168.60.4
2
www.lambda.com
A Record
192.168.60.2
DNS Cache

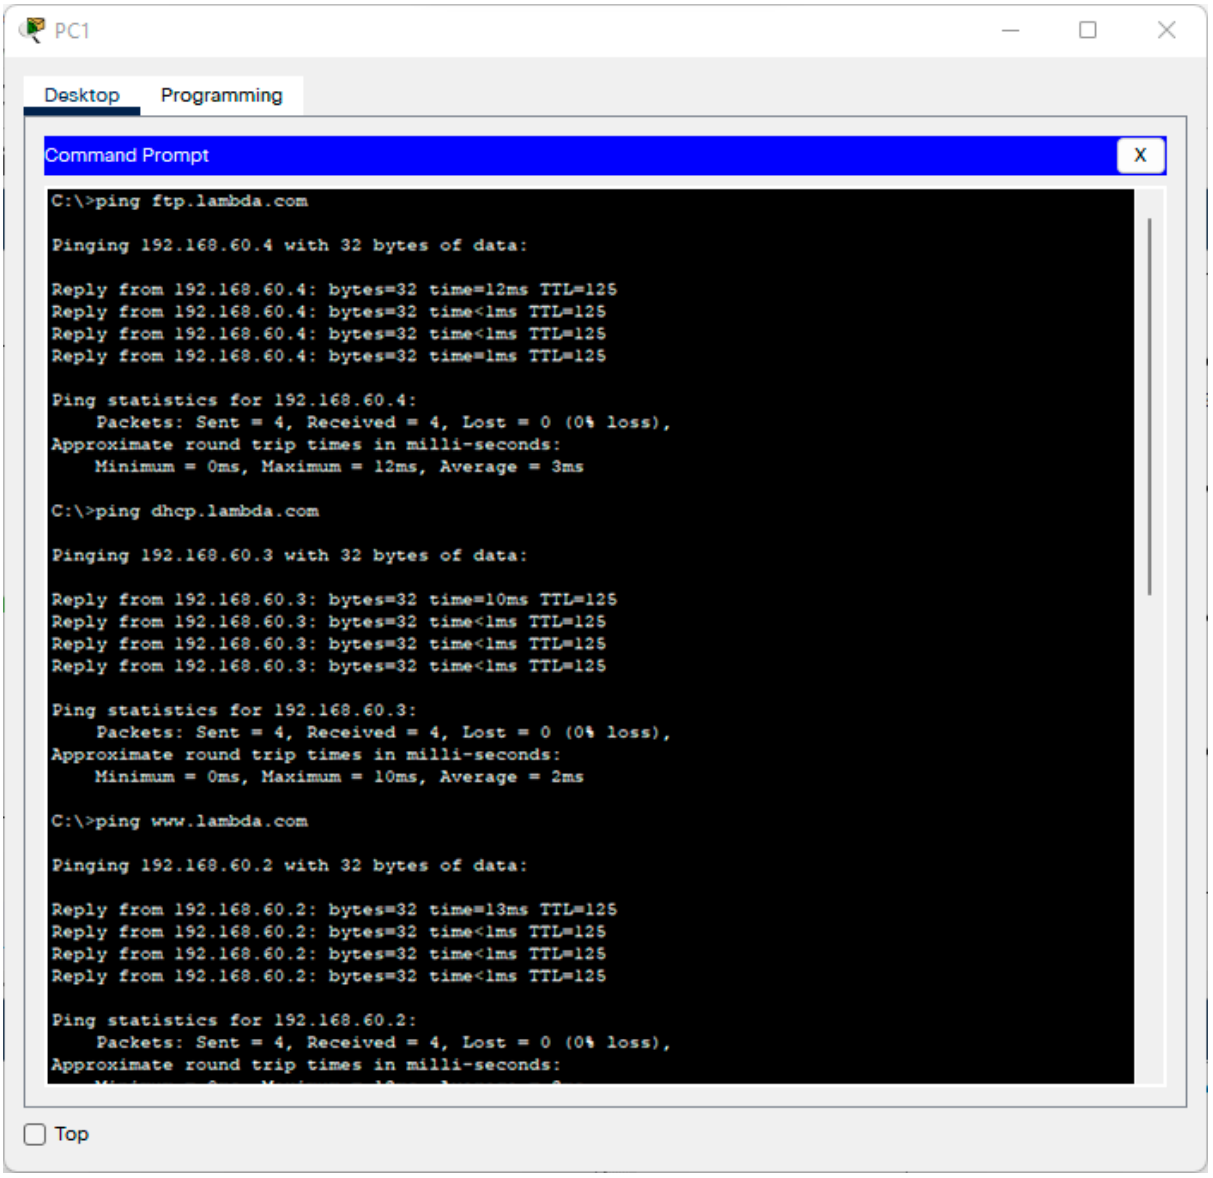
PC1
Desktop
Programming
Command Prompt
X
C:\>ping ftp.lambda.com
Pinging 192.168.60.4 with 32 bytes of data:
Reply from 192.168.60.4: bytes=32 time=12ms TTL=125
Reply from 192.168.60.4: bytes=32 time<1ms TTL=125
Reply from 192.168.60.4: bytes=32 time<1ms TTL=125
Reply from 192.168.60.4: bytes=32 time=1ms TTL=125
Ping statistics for 192.168.60.4:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 12ms, Average = 3ms
C:\>ping dhcp.lambda.com
Pinging 192.168.60.3 with 32 bytes of data:
Reply from 192.168.60.3: bytes=32 time=10ms TTL=125
Reply from 192.168.60.3: bytes=32 time<1ms TTL=125
Reply from 192.168.60.3: bytes=32 time<1ms TTL=125
Reply from 192.168.60.3: bytes=32 time<1ms TTL=125
Ping statistics for 192.168.60.3:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 10ms, Average = 2ms
C:\>ping www.lambda.com
Pinging 192.168.60.2 with 32 bytes of data:
Reply from 192.168.60.2: bytes=32 time=13ms TTL=125
Reply from 192.168.60.2: bytes=32 time<1ms TTL=125
Reply from 192.168.60.2: bytes=32 time<1ms TTL=125
Reply from 192.168.60.2: bytes=32 time<1ms TTL=125
Ping statistics for 192.168.60.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Top

Configurando HTTP

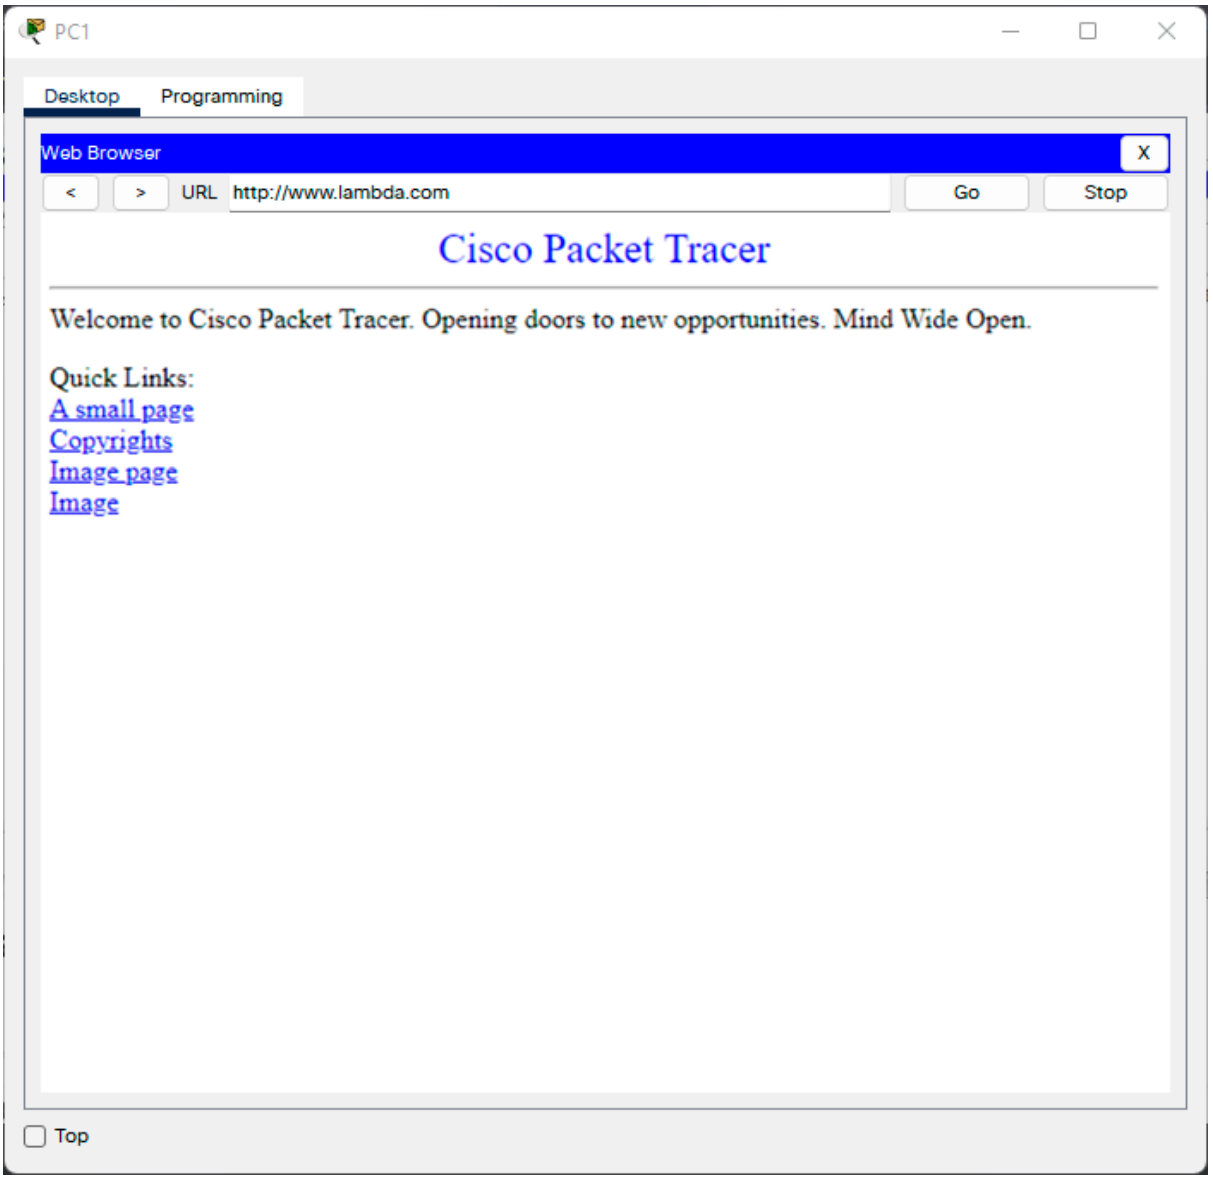

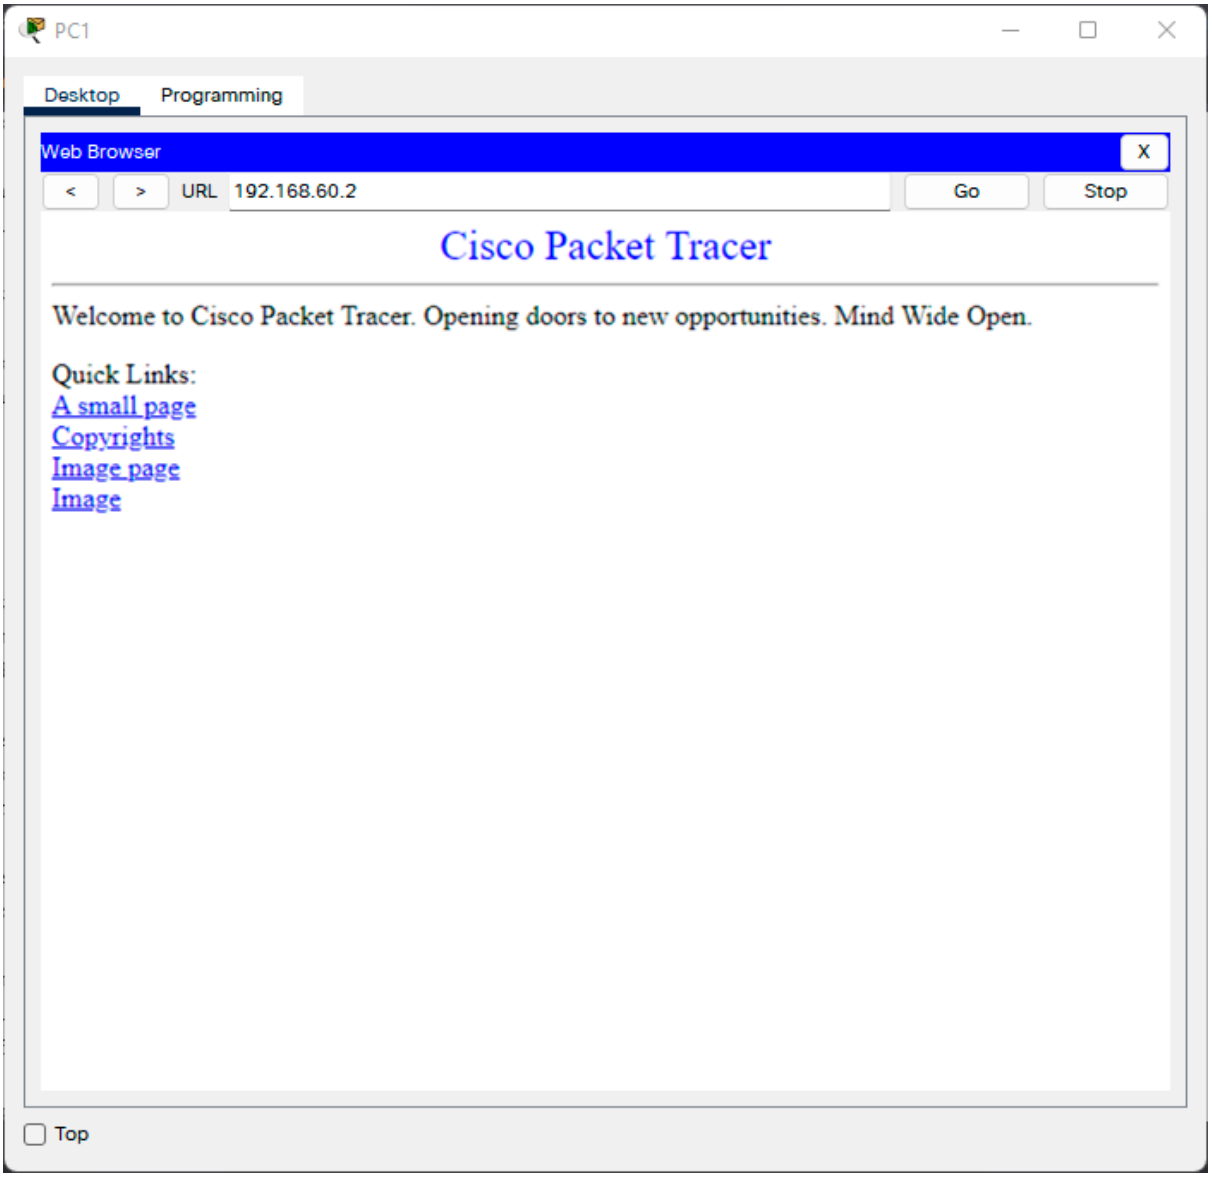
PC1
Desktop
Programming
Web Browser
X
<
>
URL
192.168.60.2
Go
Stop
Cisco Packet Tracer
Welcome to Cisco Packet Tracer. Opening doors to new opportunities. Mind Wide Open.
Quick Links:
A small page
Copyrights
Image page
Image
Top

Configurando DCHP

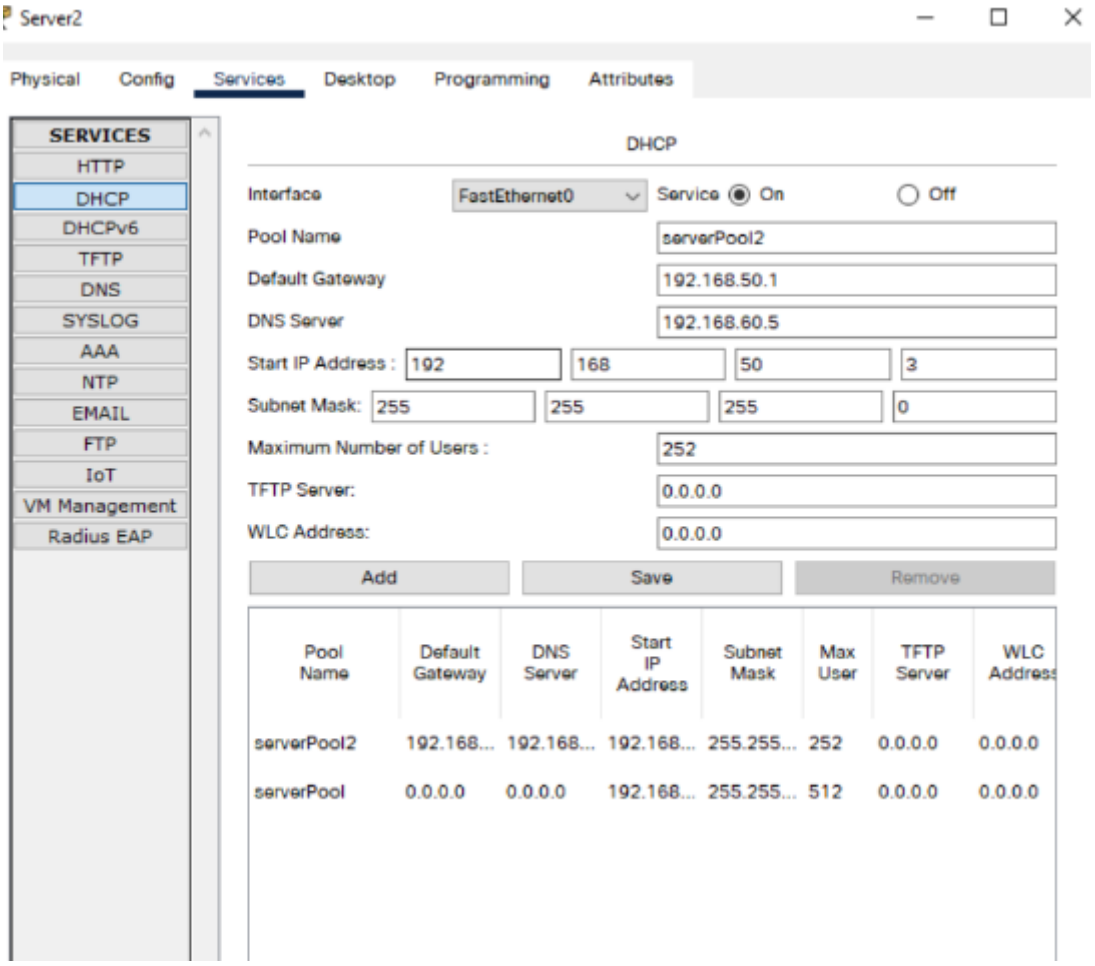


```
User Access Verification

Password:

R1>enable
Password:
R1#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
R1(config)#interface fast
R1(config)#interface fastEthernet 6/0
R1(config-if)#ip helper-address 192.168.60.3
R1(config-if)#end
R1#
%SYS-5-CONFIG_I: Configured from console by console

R1#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
R1(config)#interface fast
R1(config)#interface fastEthernet 6/0
R1(config-if)#ip helper-address 192.168.60.3
R1(config-if)#end
R1#
%SYS-5-CONFIG_I: Configured from console by console

R1#
```

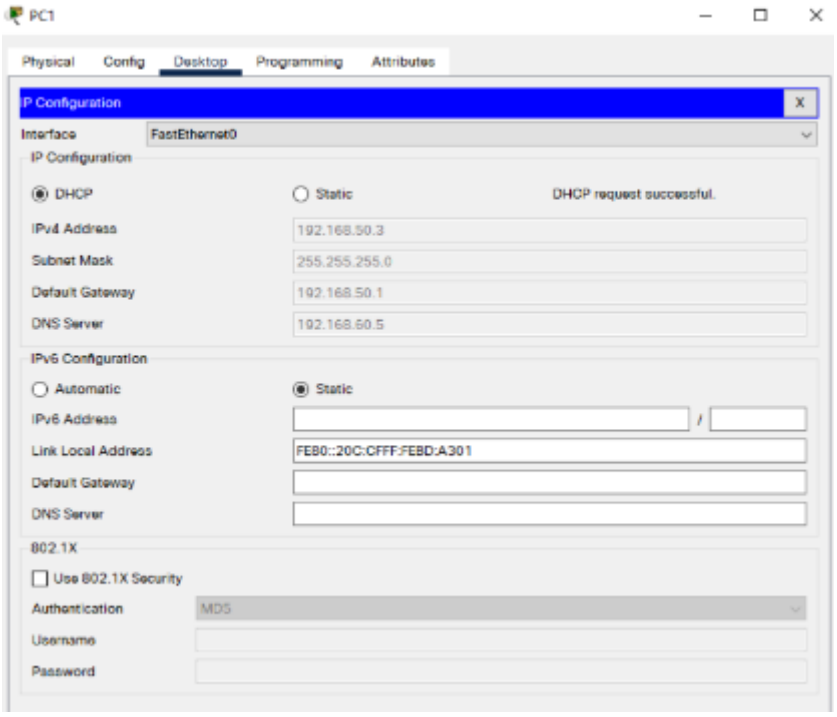


```
Packet Tracer PC Command Line 1.0
C:\>ping 192.168.60.2

Pinging 192.168.60.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.60.2: bytes=32 time=15ms TTL=125
Reply from 192.168.60.2: bytes=32 time<1ms TTL=125
Reply from 192.168.60.2: bytes=32 time<1ms TTL=125

Ping statistics for 192.168.60.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 15ms, Average = 5ms
```

Configurando FTP

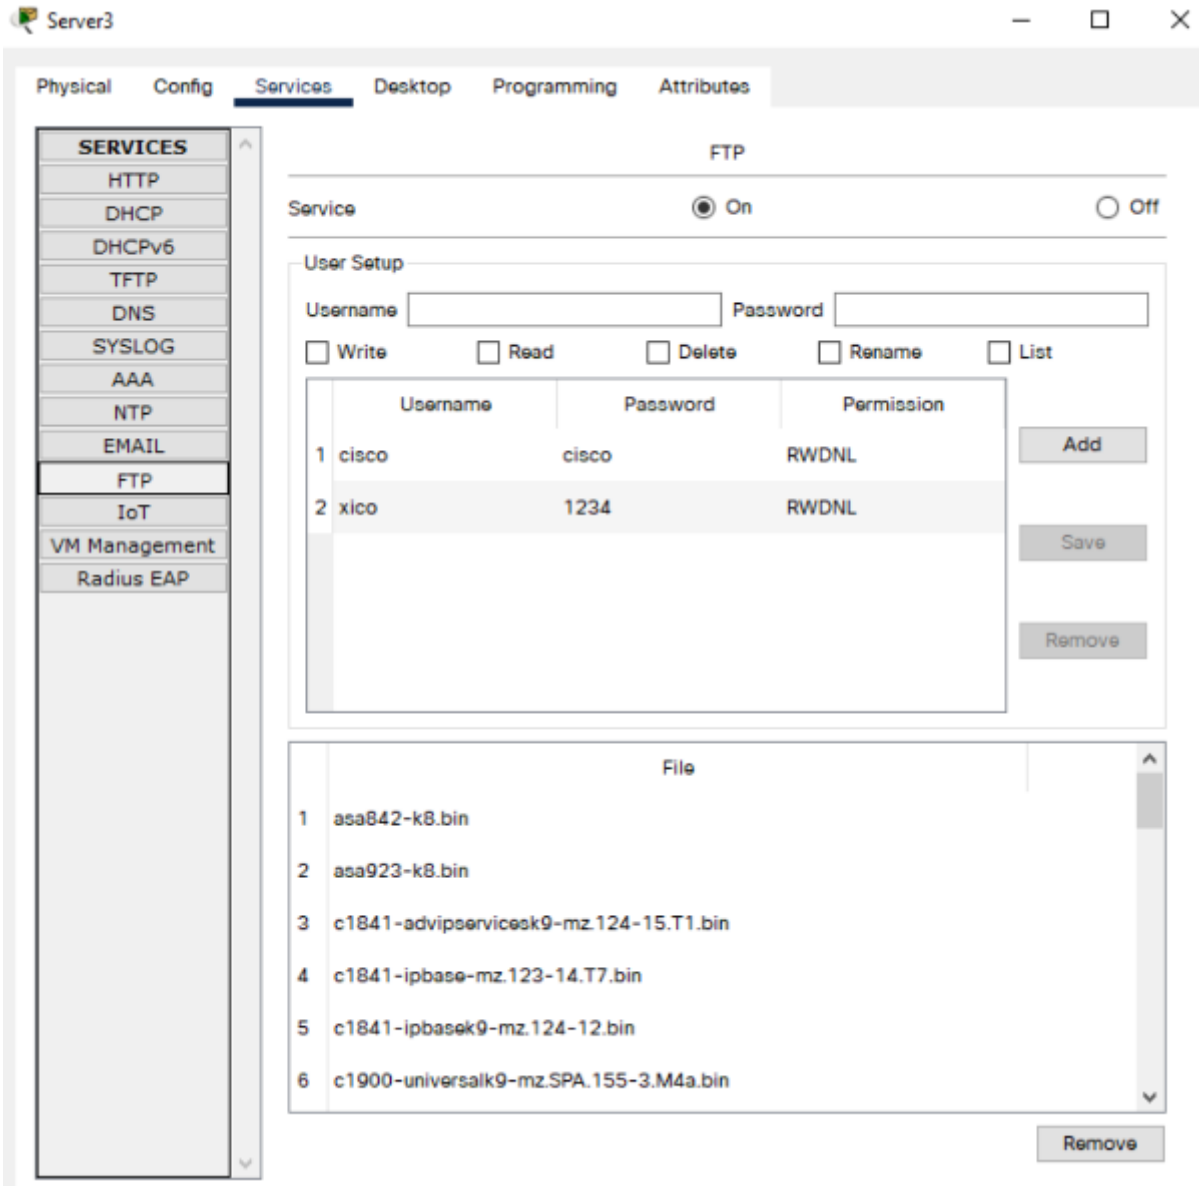

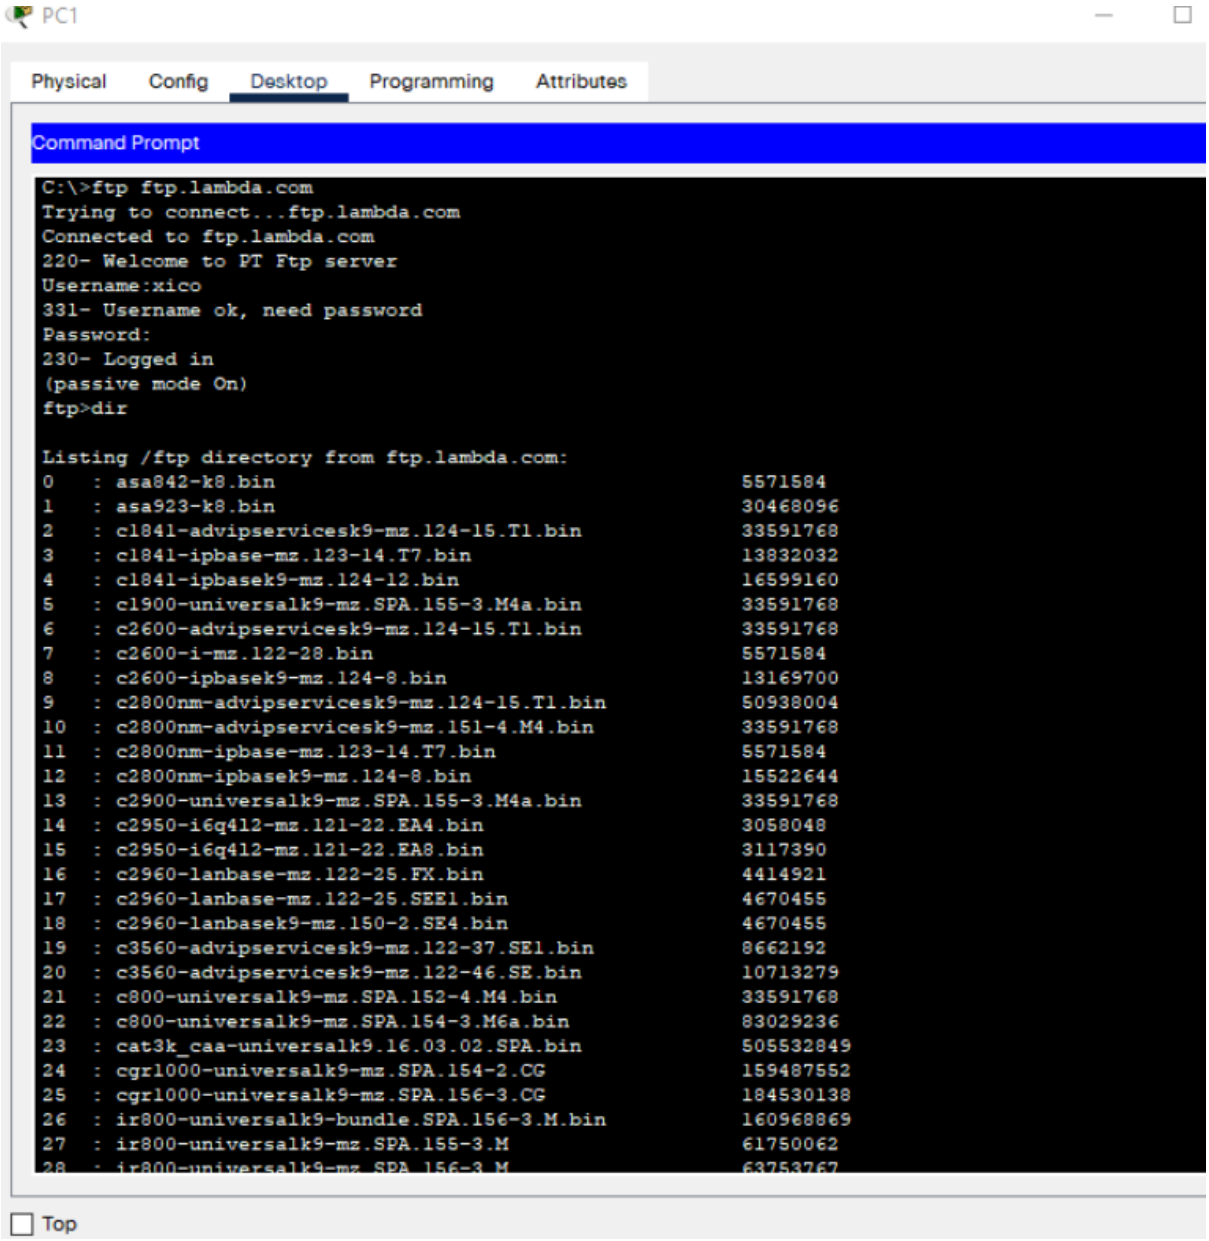
PC1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
C:\>ftp ftp.lambda.com
Trying to connect...ftp.lambda.com
Connected to ftp.lambda.com
220- Welcome to PT Ftp server
Username:xico
331- Username ok, need password
Password:
230- Logged in
(passive mode On)
ftp>dir
Listing /ftp directory from ftp.lambda.com:
0 : asa842-k8.bin 5571584
1 : asa923-k8.bin 30468096
2 : c1841-advipservicesk9-mz.124-15.T1.bin 33591768
3 : c1841-ipbase-mz.123-14.T7.bin 13832032
4 : c1841-ipbasek9-mz.124-12.bin 16599160
5 : c1900-universalk9-mz.SPA.155-3.M4a.bin 33591768
6 : c2600-advipservicesk9-mz.124-15.T1.bin 33591768
7 : c2600-i-mz.122-28.bin 5571584
8 : c2600-ipbasek9-mz.124-8.bin 13169700
9 : c2800nm-advipservicesk9-mz.124-15.T1.bin 50938004
10 : c2800nm-advipservicesk9-mz.151-4.M4.bin 33591768
11 : c2800nm-ipbase-mz.123-14.T7.bin 5571584
12 : c2800nm-ipbasek9-mz.124-8.bin 15522644
13 : c2900-universalk9-mz.SPA.155-3.M4a.bin 33591768
14 : c2950-i6q4l2-mz.121-22.EA4.bin 3058048
15 : c2950-i6q4l2-mz.121-22.EA8.bin 3117390
16 : c2960-lanbase-mz.122-25.FX.bin 4414921
17 : c2960-lanbase-mz.122-25.SEE1.bin 4670455
18 : c2960-lanbasek9-mz.150-2.SE4.bin 4670455
19 : c3560-advipservicesk9-mz.122-37.SE1.bin 8662192
20 : c3560-advipservicesk9-mz.122-46.SE.bin 10713279
21 : c800-universalk9-mz.SPA.152-4.M4.bin 33591768
22 : c800-universalk9-mz.SPA.154-3.M6a.bin 83029236
23 : cat3k_caa-universalk9.16.03.02.SPA.bin 505532849
24 : cgr1000-universalk9-mz.SPA.154-2.CG 159487552
25 : cgr1000-universalk9-mz.SPA.156-3.CG 184530138
26 : ir800-universalk9-bundle.SPA.156-3.M.bin 160968869
27 : ir800-universalk9-mz.SPA.155-3.M 61750062
28 : ir800-universalk9-mz.SPA.156-3.M 63753767
Top