Thông số kỹ thuật





miniature, Harmony Electromechanical Relays, 5A, 2CO, with LED, 24V DC

RXM2LB2BD

Main

Range of product	Harmony Electromechanical Relays	
Coil interference suppression	Without	
Series name	Miniature	
Product or component type	Plug-in relay	
Device short name	RXM	
Contacts type and composition	2 C/O	
[Ithe] conventional enclosed thermal current	5 A at -4055 °C	

Complementary

oompromentary		
Contact operation	Standard	
[Uc] control circuit voltage	24 V DC	
Status LED	With	
Control type	Without push-button	
[Uimp] rated impulse withstand voltage	4 kV during 1.2/50 μs conforming to IEC 61810-7	
[le] rated operational current	5 A (AC-1/DC-1) NO conforming to IEC 2.5 A (AC-1/DC-1) NC conforming to IEC 1 A at 28 V (DC-13) NO	
Minimum switching capacity	25 mW subject to switching frequency, environment or expected reliability level etc	
Operating time	20 ms between coil de-energisation and making of the Off-delay contact 20 ms between coil energisation and making of the On-delay contact	
CAD overall width	21 mm	
CAD overall height	27 mm	
CAD overall depth	46 mm	
Minimum switching current	5 mA subject to switching frequency, environment or expected reliability level etc	
Minimum switching voltage	5 V subject to switching frequency, environment or expected reliability level etc	
Rated operational voltage limits	19.226.4 V DC	
[Ui] rated insulation voltage	250 V conforming to IEC	
Maximum switching voltage	250 V AC 28 V DC	
Drop-out voltage threshold	>= 0.1 Uc DC	
Load current	5 A at 250 V AC 5 A at 28 V DC	
Maximum switching capacity	1250 VA AC 140 W DC	

at 23 °C +/- 10 % C cycles cycles for resistive load cles, 1 A at 28 V, DC-13 NO	
cles, 1 A at 28 V, DC-13 NO	
ycles for resistive load cles, 1 A at 28 V, DC-13 NO	
cles, 1 A at 28 V, DC-13 NO	
B10d = 100000	
cycles/hour under load cycles/hour no-load	
2000 V AC between coil and contact with basic insulation 2000 V AC between poles with basic insulation 1000 V AC between contacts with micro disconnection	
Any position	
Level A group mounting	
y (Ag/Ni)	

Environment

IP degree of protection	IP40 conforming to IEC 60529	
Standards	IEC 61810-1 (iss. 2) CE	
Ambient air temperature for storage	-4085 °C	
Vibration resistance	3 gn, amplitude = +/- 1 mm (f = 1050 Hz)operating conforming to IEC 60068-2-6 6 gn, amplitude = +/- 1 mm (f = 1050 Hz)not operating conforming to IEC 60068-2-6	
Shock resistance	30 gn for not operating conforming to IEC 60068-2-27 10 gn for in operation conforming to IEC 60068-2-27	

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.000 cm
Package 1 Width	2.500 cm
Package 1 Length	4.500 cm
Package 1 Weight	33.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	3.000 cm
Package 2 Width	10.500 cm
Package 2 Length	12.500 cm
Package 2 Weight	363.000 g
Unit Type of Package 3	S02

Number of Units in Package 3	270
Package 3 Height	15.000 cm
Package 3 Width	30.000 cm
Package 3 Length	40.000 cm
Package 3 Weight	10.065 kg

Contractual warranty

Warranty 18 months



Nhãn **Green PremiumTM** là cam kết của Schneider Electric trong việc cung cấp sản phẩm với hiệu suất môi trường tốt nhất. Green Premium cam kết tuân thủ các quy định mới nhất, minh bạch về tác động môi trường, cũng như các sản phẩm tuần hoàn và CO₂ thấp.

Hướng dẫn đánh giá tính bền vững của sản phẩm là tài liệu kỹ thuật phổ thông giúp làm rõ các tiêu chuẩn nhãn sinh thái toàn cầu và cách diễn giải việc khai báo môi trường.

Tìm hiểu thêm về Green Premium >

Hướng dẫn đánh giá về sự bền vững của sản phẩm >





Minh bach RoHS/REACh

Hiệu suất sức khoẻ

✓ Reach Free Of Svhc
 ✓ Toxic Heavy Metal Free
 ✓ Mercury Free
 ✓ Rohs Exemption Information


Chứng nhận & Tiêu chuẩn

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information


RXM2LB2BD

Dimensions Drawings

Dimensions

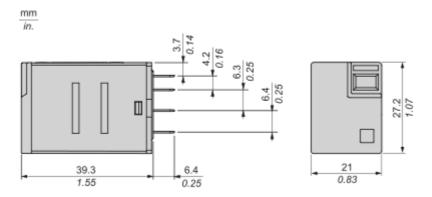

Pin Side View




RXM2LB2BD

Connections and Schema

Wiring Diagram





Symbols shown in blue correspond to Nema marking.


RXM2LB2BD

Performance Curves

Electrical Durability of Contacts

Durability (inductive load) = durability (resistive load) x reduction coefficient.

For 2 Poles Relay



X: Contact current (A)

Y: Durability (Number of operating cycles)

A: Inductive load B: Resistive load


Note: These are typical curves, actual durability depends on load, environment, duty cycle, etc.

For inductive load, to increase relay life cycles, please add a proper load protection circuit (eg: RC protection/Varistor/free Wheeling diode -DC load only-)

RXM2LB2BD

Maximum Switching Capacity

For 2 Poles Relay



X: Contact voltage (v)
Y: Contact current (A)
A: Inductive AC load
B: Resistive AC load
C: Inductive DC load
D: Resistive DC load

Note: These are typical curves, actual durability depends on load, environment, duty cycle, etc.


For inductive load, to increase relay life cycles, please add a proper load protection circuit (eg: RC protection/Varistor/free Wheeling diode -DC load only-)

For low level loads (below 10mA), we recommend to use RXM*GB series with bifurcated contacts relays instead.

RXM2LB2BD

Technical Illustration

Dimensions

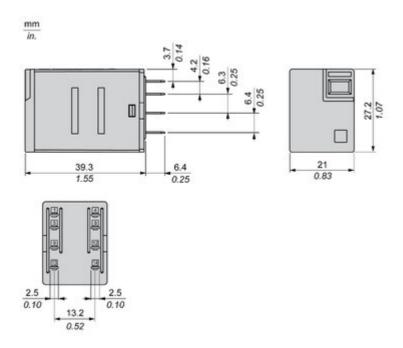


RXM2LB2BD

Image of product / Alternate images


Alternative



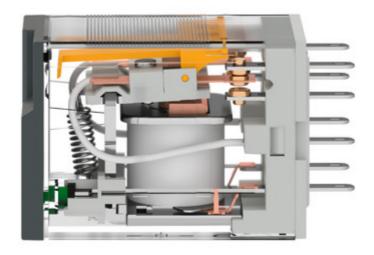

RXM2LB2BD



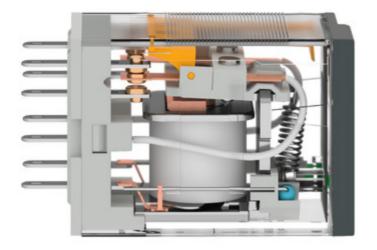





RXM2LB2BD

Image of product in real life situation

