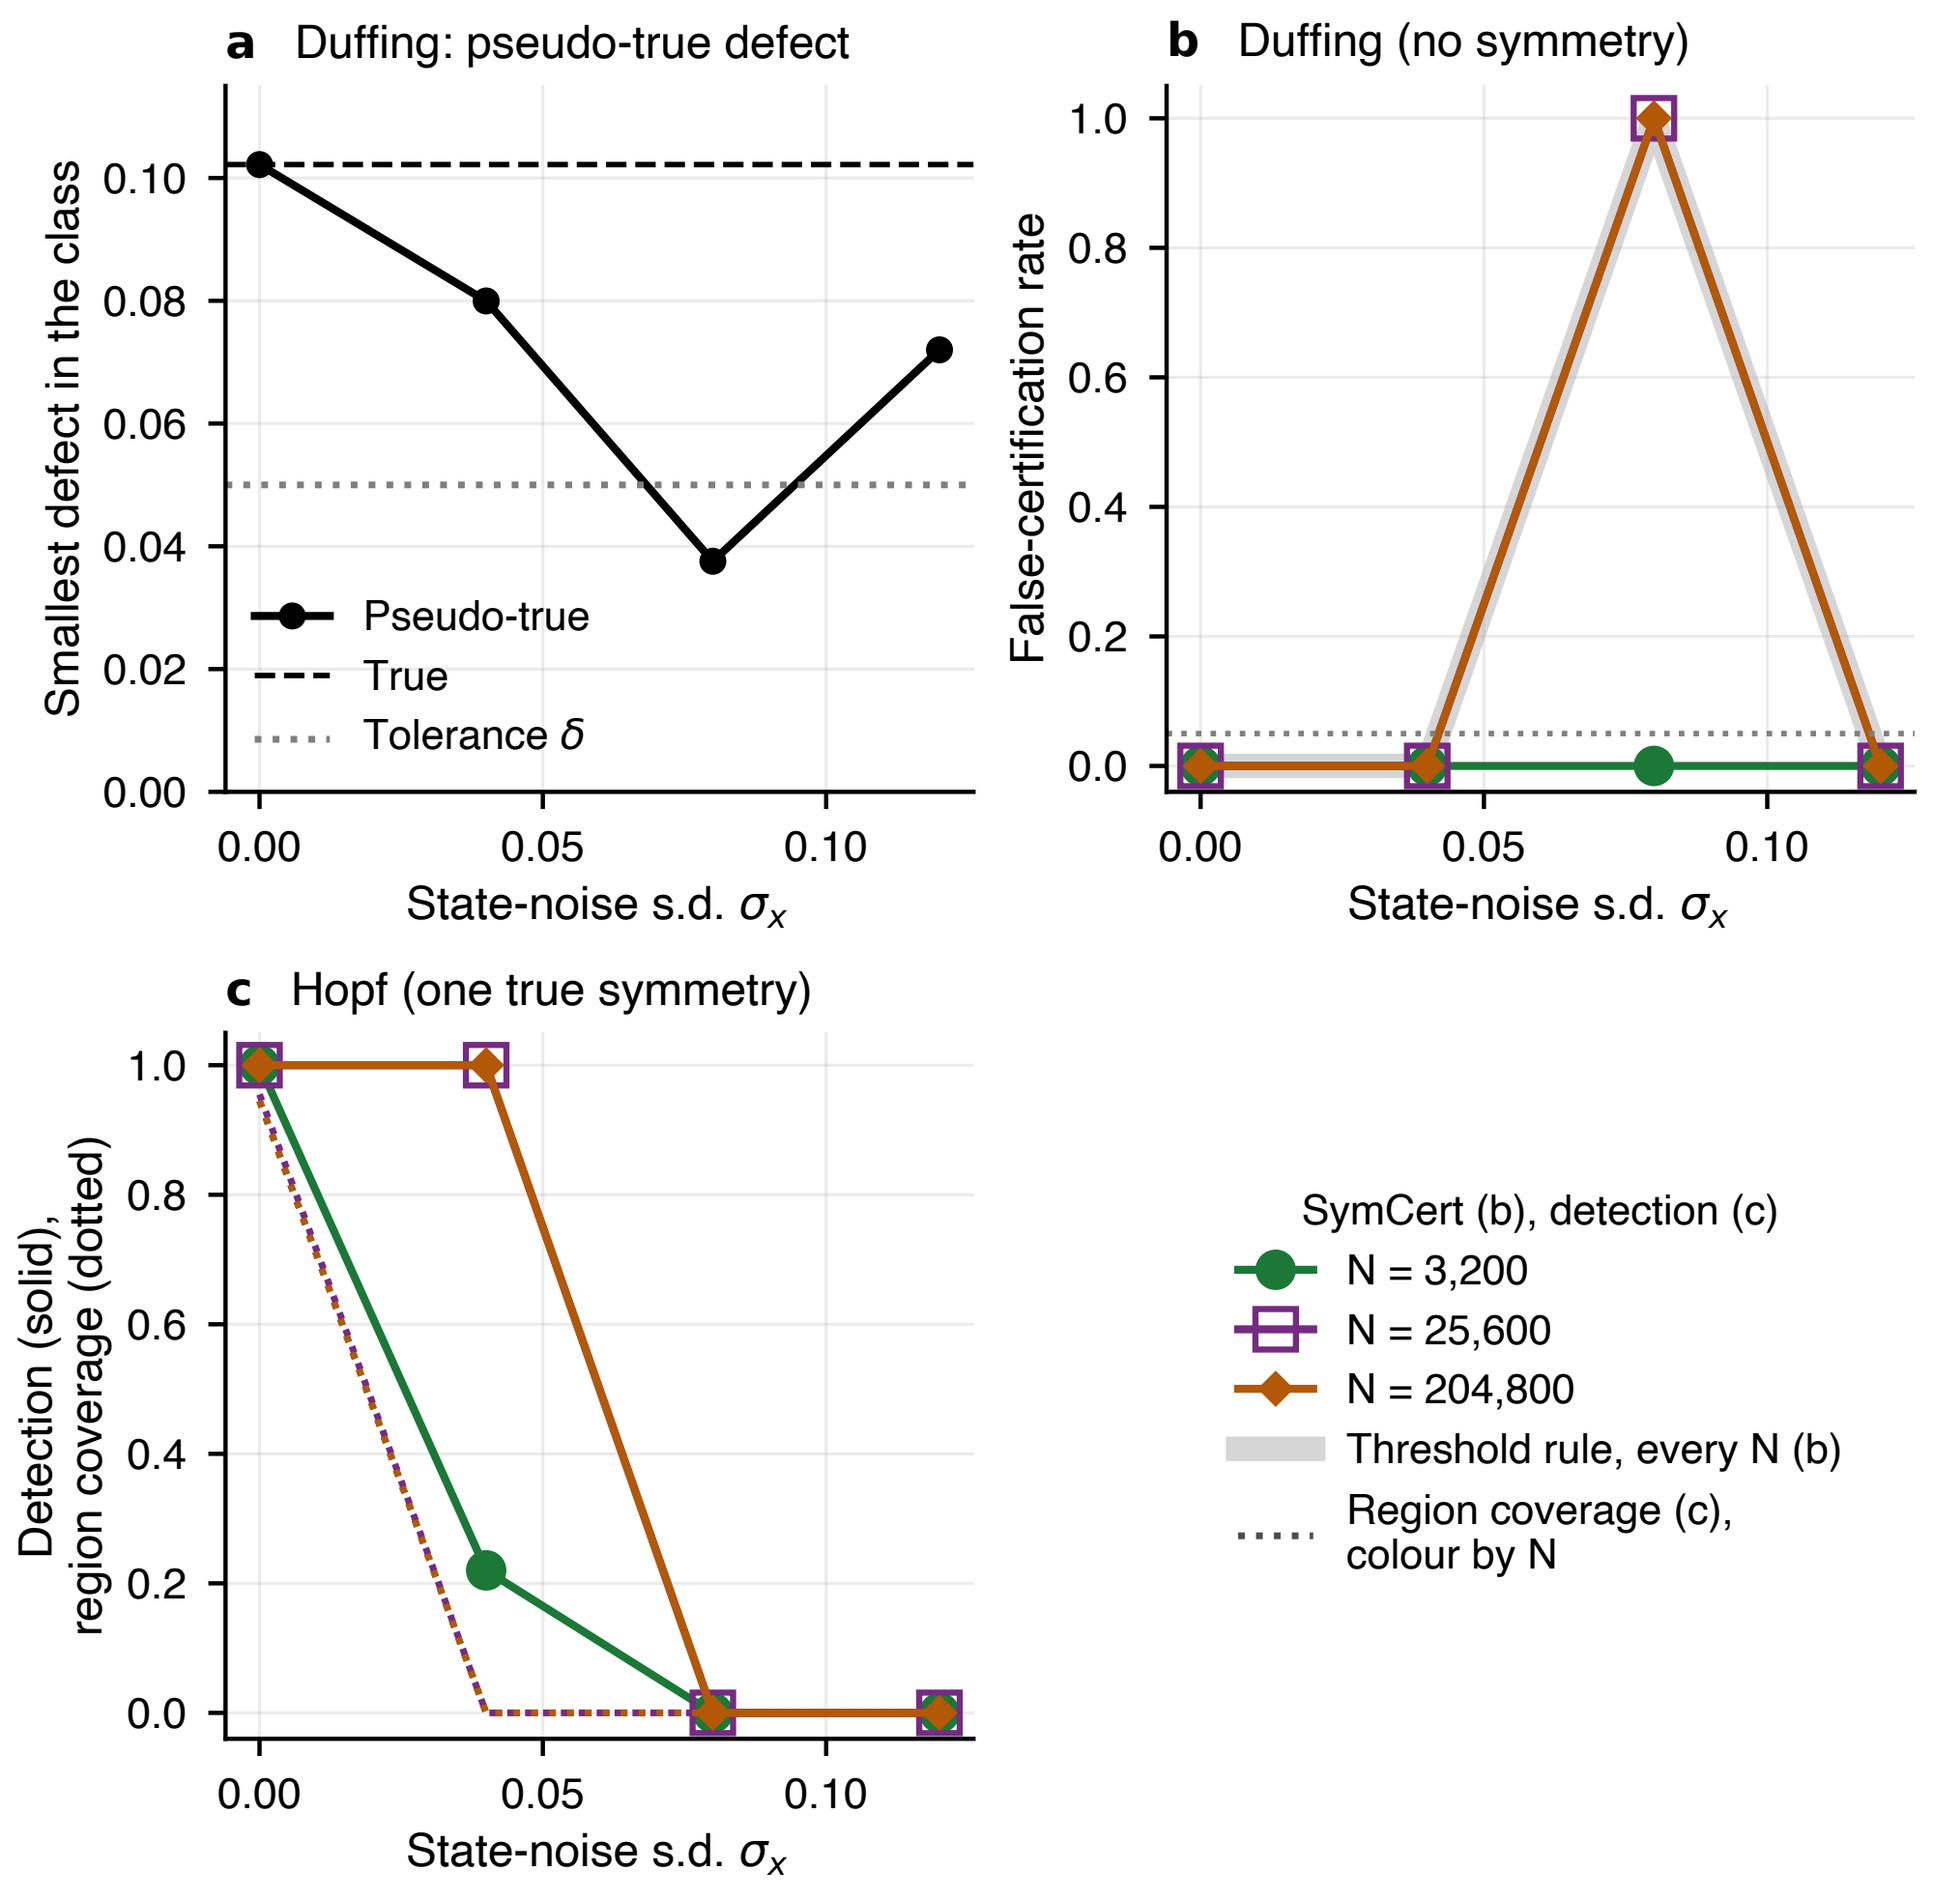
a Duffing: pseudo-true defect
Smallest defect in the class
0.10
0.08
0.06
0.04
0.02
0.00
Pseudo-true
True
Tolerance δ
0.00
0.05
0.10
State-noise s.d. σx
b Duffing (no symmetry)
False-certification rate
1.0
0.8
0.6
0.4
0.2
0.0
0.00
0.05
0.10
State-noise s.d. σx
c Hopf (one true symmetry)
Detection (solid), region coverage (dotted)
1.0
0.8
0.6
0.4
0.2
0.0
0.00
0.05
0.10
State-noise s.d. σx
SymCert (b), detection (c)
N = 3,200
N = 25,600
N = 204,800
Threshold rule, every N (b)
Region coverage (c), colour by N