Cooperating Processes

- **Independent** process cannot affect or be affected by the execution of another process
- **Cooperating** process can affect or be affected by the execution of another process
- Advantages of process cooperation
  - Information sharing
  - Computation speed-up
  - Modularity
  - Convenience

Communications Models

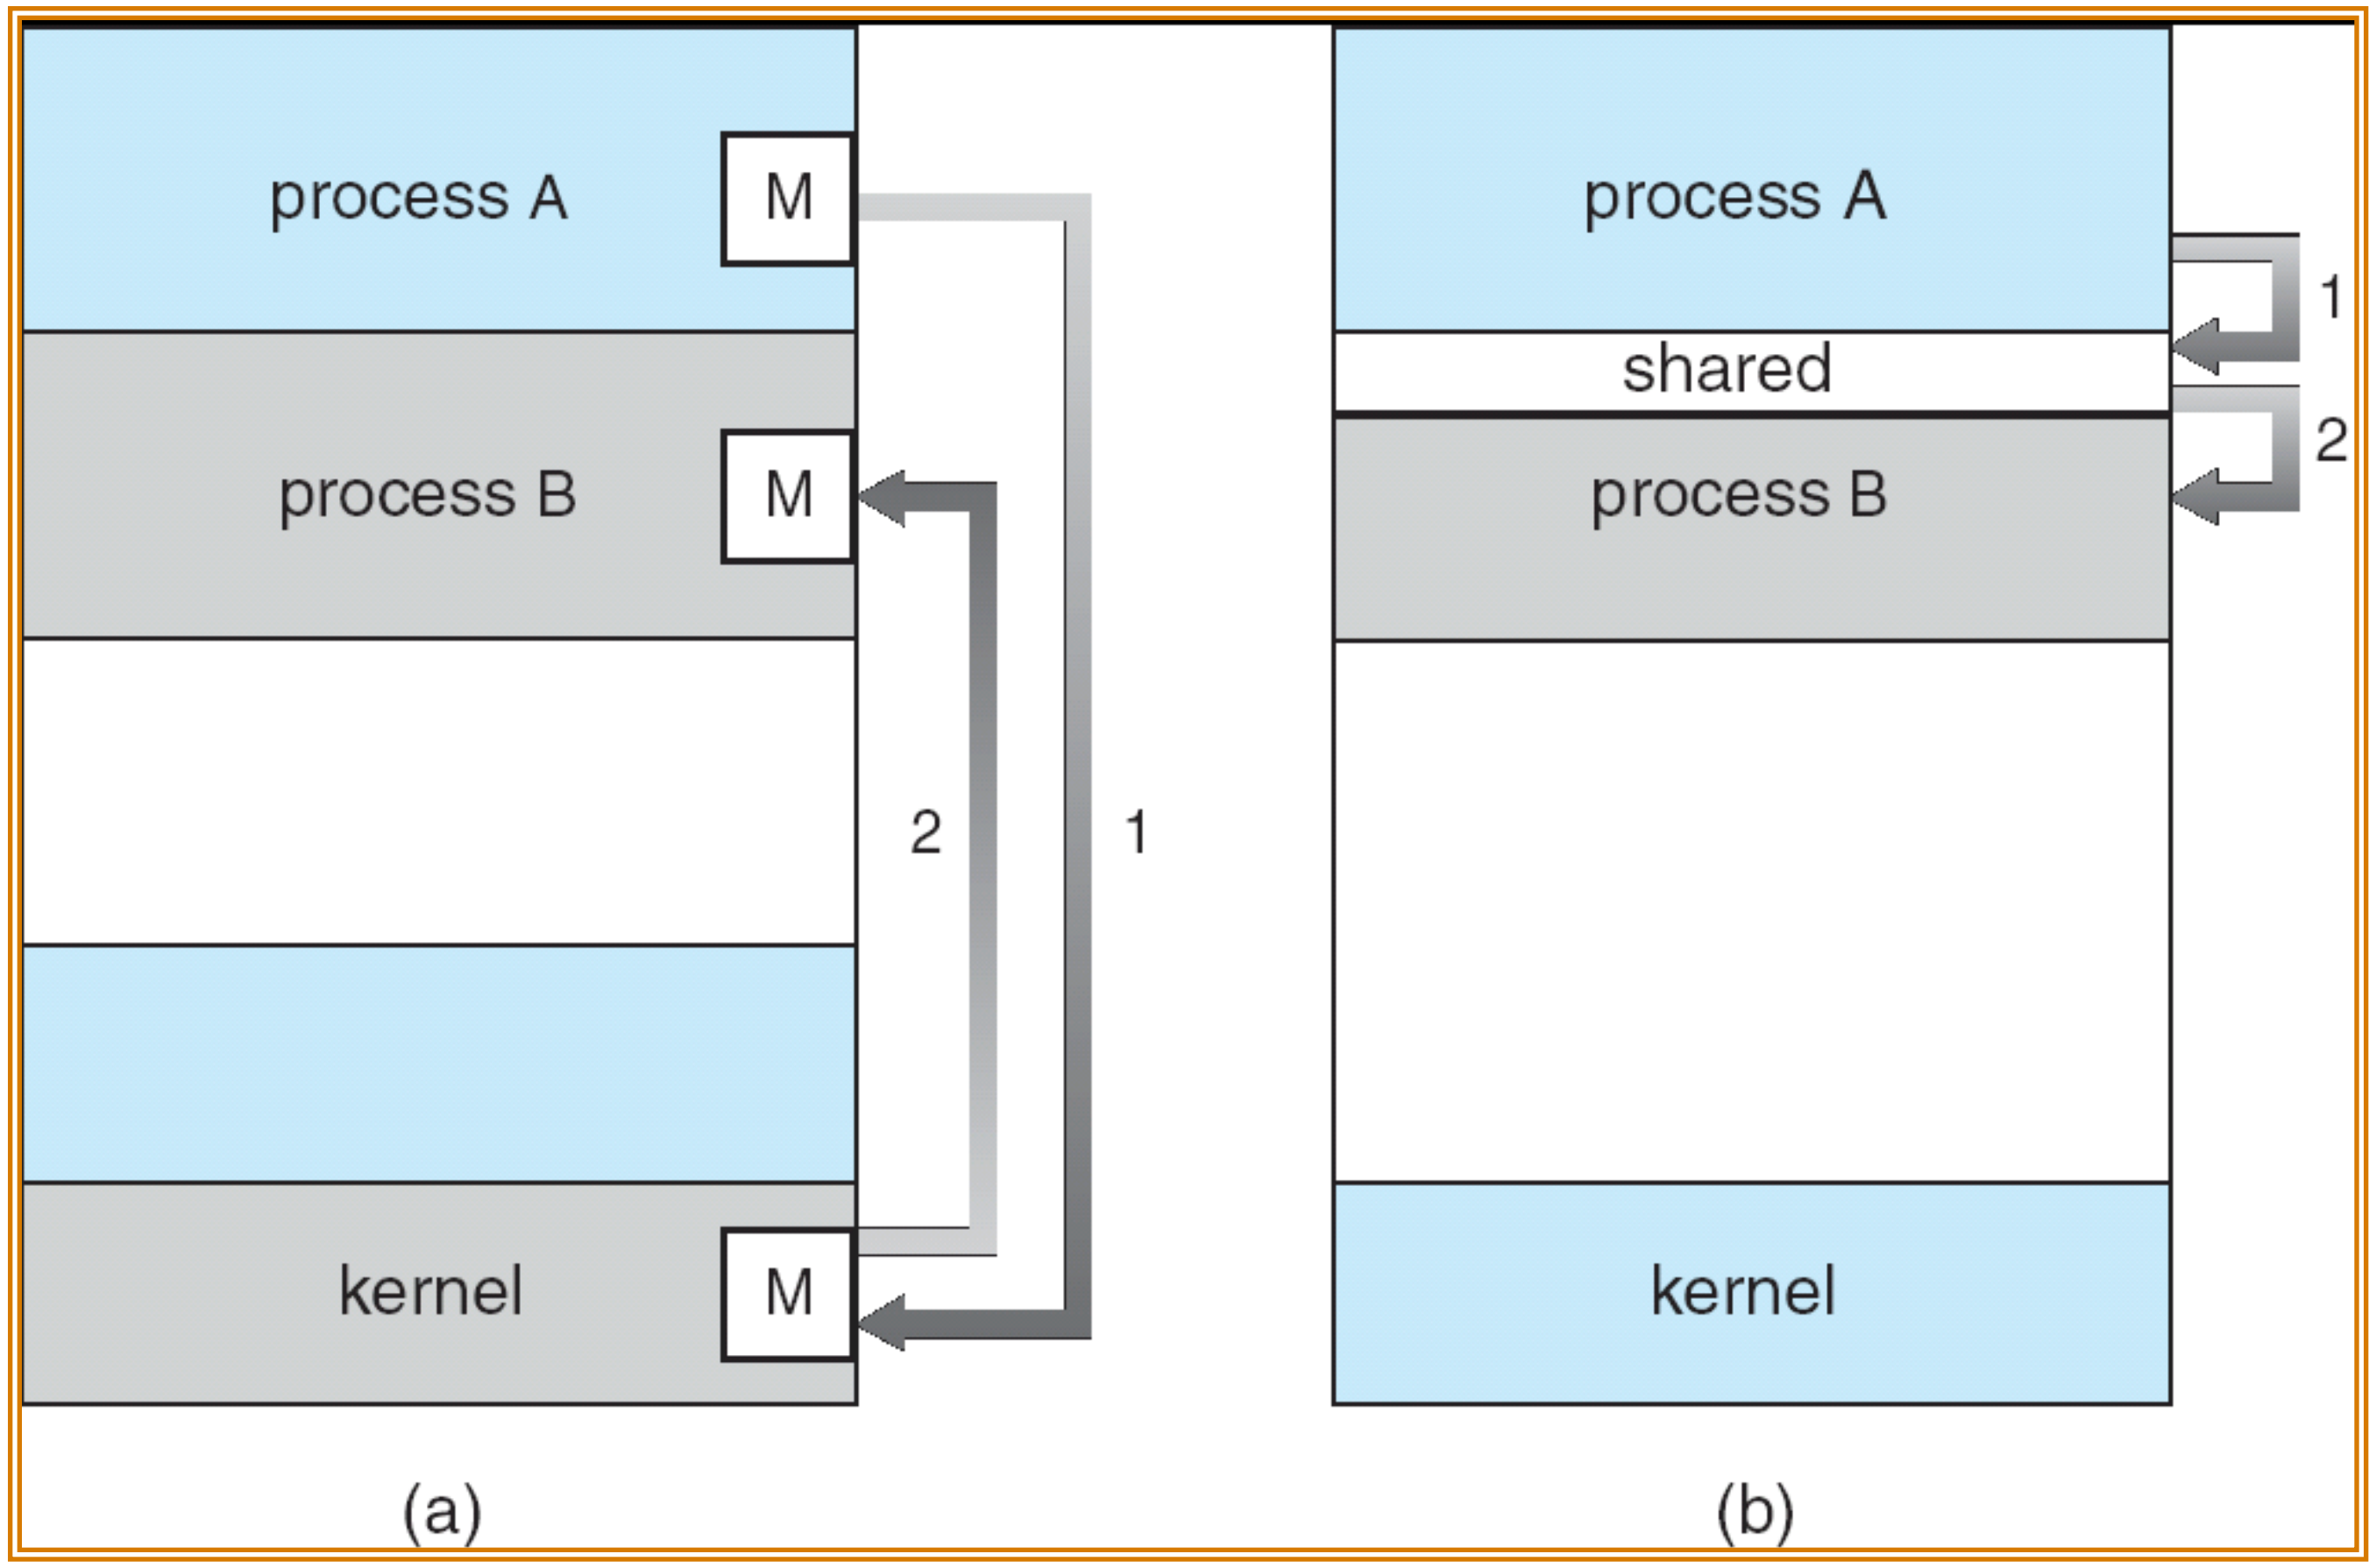

a. Message Passing b. Shared Memory

Producer-Consumer Problem

- Paradigm for cooperating processes, *producer* process produces information that is consumed by a *consumer* process
  - *unbounded-buffer* places no practical limit on the size of the buffer
  - *bounded-buffer* assumes that there is a fixed buffer size

Bounded-Buffer – Shared-Memory Solution

- Shared data

```
#define BUFFER_SIZE 10
typedef struct {
   . . .
} item;

item buffer[BUFFER_SIZE];
int in = 0;
int out = 0;
```

- Solution is correct, but can only use BUFFER_SIZE-1 elements

Bounded-Buffer – Producer Process

```
while (true) {
   /* Produce an item */
        while (((in + 1) % 
BUFFER_SIZE) == out)
            ;   /* do nothing -- no 
free buffers */
      buffer[in] = item;
       in = (in + 1) % BUFFER_SIZE;
   {
```

Bounded Buffer – Consumer Process

```
while (true) {
        while (in == out)
               ; // do nothing --
nothing to consume
      // remove an item from the
buffer
      item = buffer[out];
      out = (out + 1) %
BUFFER_SIZE;
}
```

Message Passing System

- Mechanism for processes to communicate and to synchronize their actions
- Message system – processes communicate with each other without resorting to shared variables
- IPC facility provides two operations:
  - **send**(*message*) –message size fixed/variable
  - **receive**(*message*)
- If *P* and *Q* wish to communicate, they need to:
  - establish a *communication link* between them
  - exchange messages via send/receive
- Implementation of communication link
  - physical (e.g., shared memory, hardware bus)
  - logical (e.g., logical properties)

Direct Communication

- Processes must name each other explicitly:
  - **send** (*P, message*) – send a message to process P
  - **receive**(*Q, message*) – receive a message from process Q
- Properties of communication link
  - Links are established automatically
  - A link is associated with exactly one pair of communicating processes
  - Between each pair there exists exactly one link
  - The link may be unidirectional, but is usually bi-directional

Indirect Communication

- Messages are directed and received from mailboxes (also referred to as ports)
  - Each mailbox has a unique id
  - Processes can communicate only if they share a mailbox
- Properties of communication link
  - Link established only if processes share a common mailbox
  - A link may be associated with many processes
  - Each pair of processes may share several communication links
  - Link may be unidirectional or bi-directional

Synchronization

- Message passing may be either blocking or non-blocking
- **Blocking** is considered **synchronous**
  - **Blocking send** has the sender block until the message is received
  - **Blocking receive** has the receiver block until a message is available
- **Non-blocking** is considered **asynchronous**
  - **Non-blocking** send has the sender send the message and continue
  - **Non-blocking** receive has the receiver receive a valid message or null

Client-Server Communication

- Sockets
- Remote Procedure Calls

Sockets

- A socket is defined as an *endpoint for communication*
- Concatenation of IP address and port
- The socket **161.25.19.8:1625** refers to port **1625** on host **161.25.19.8**
- Communication consists between a pair of sockets

Socket Communication

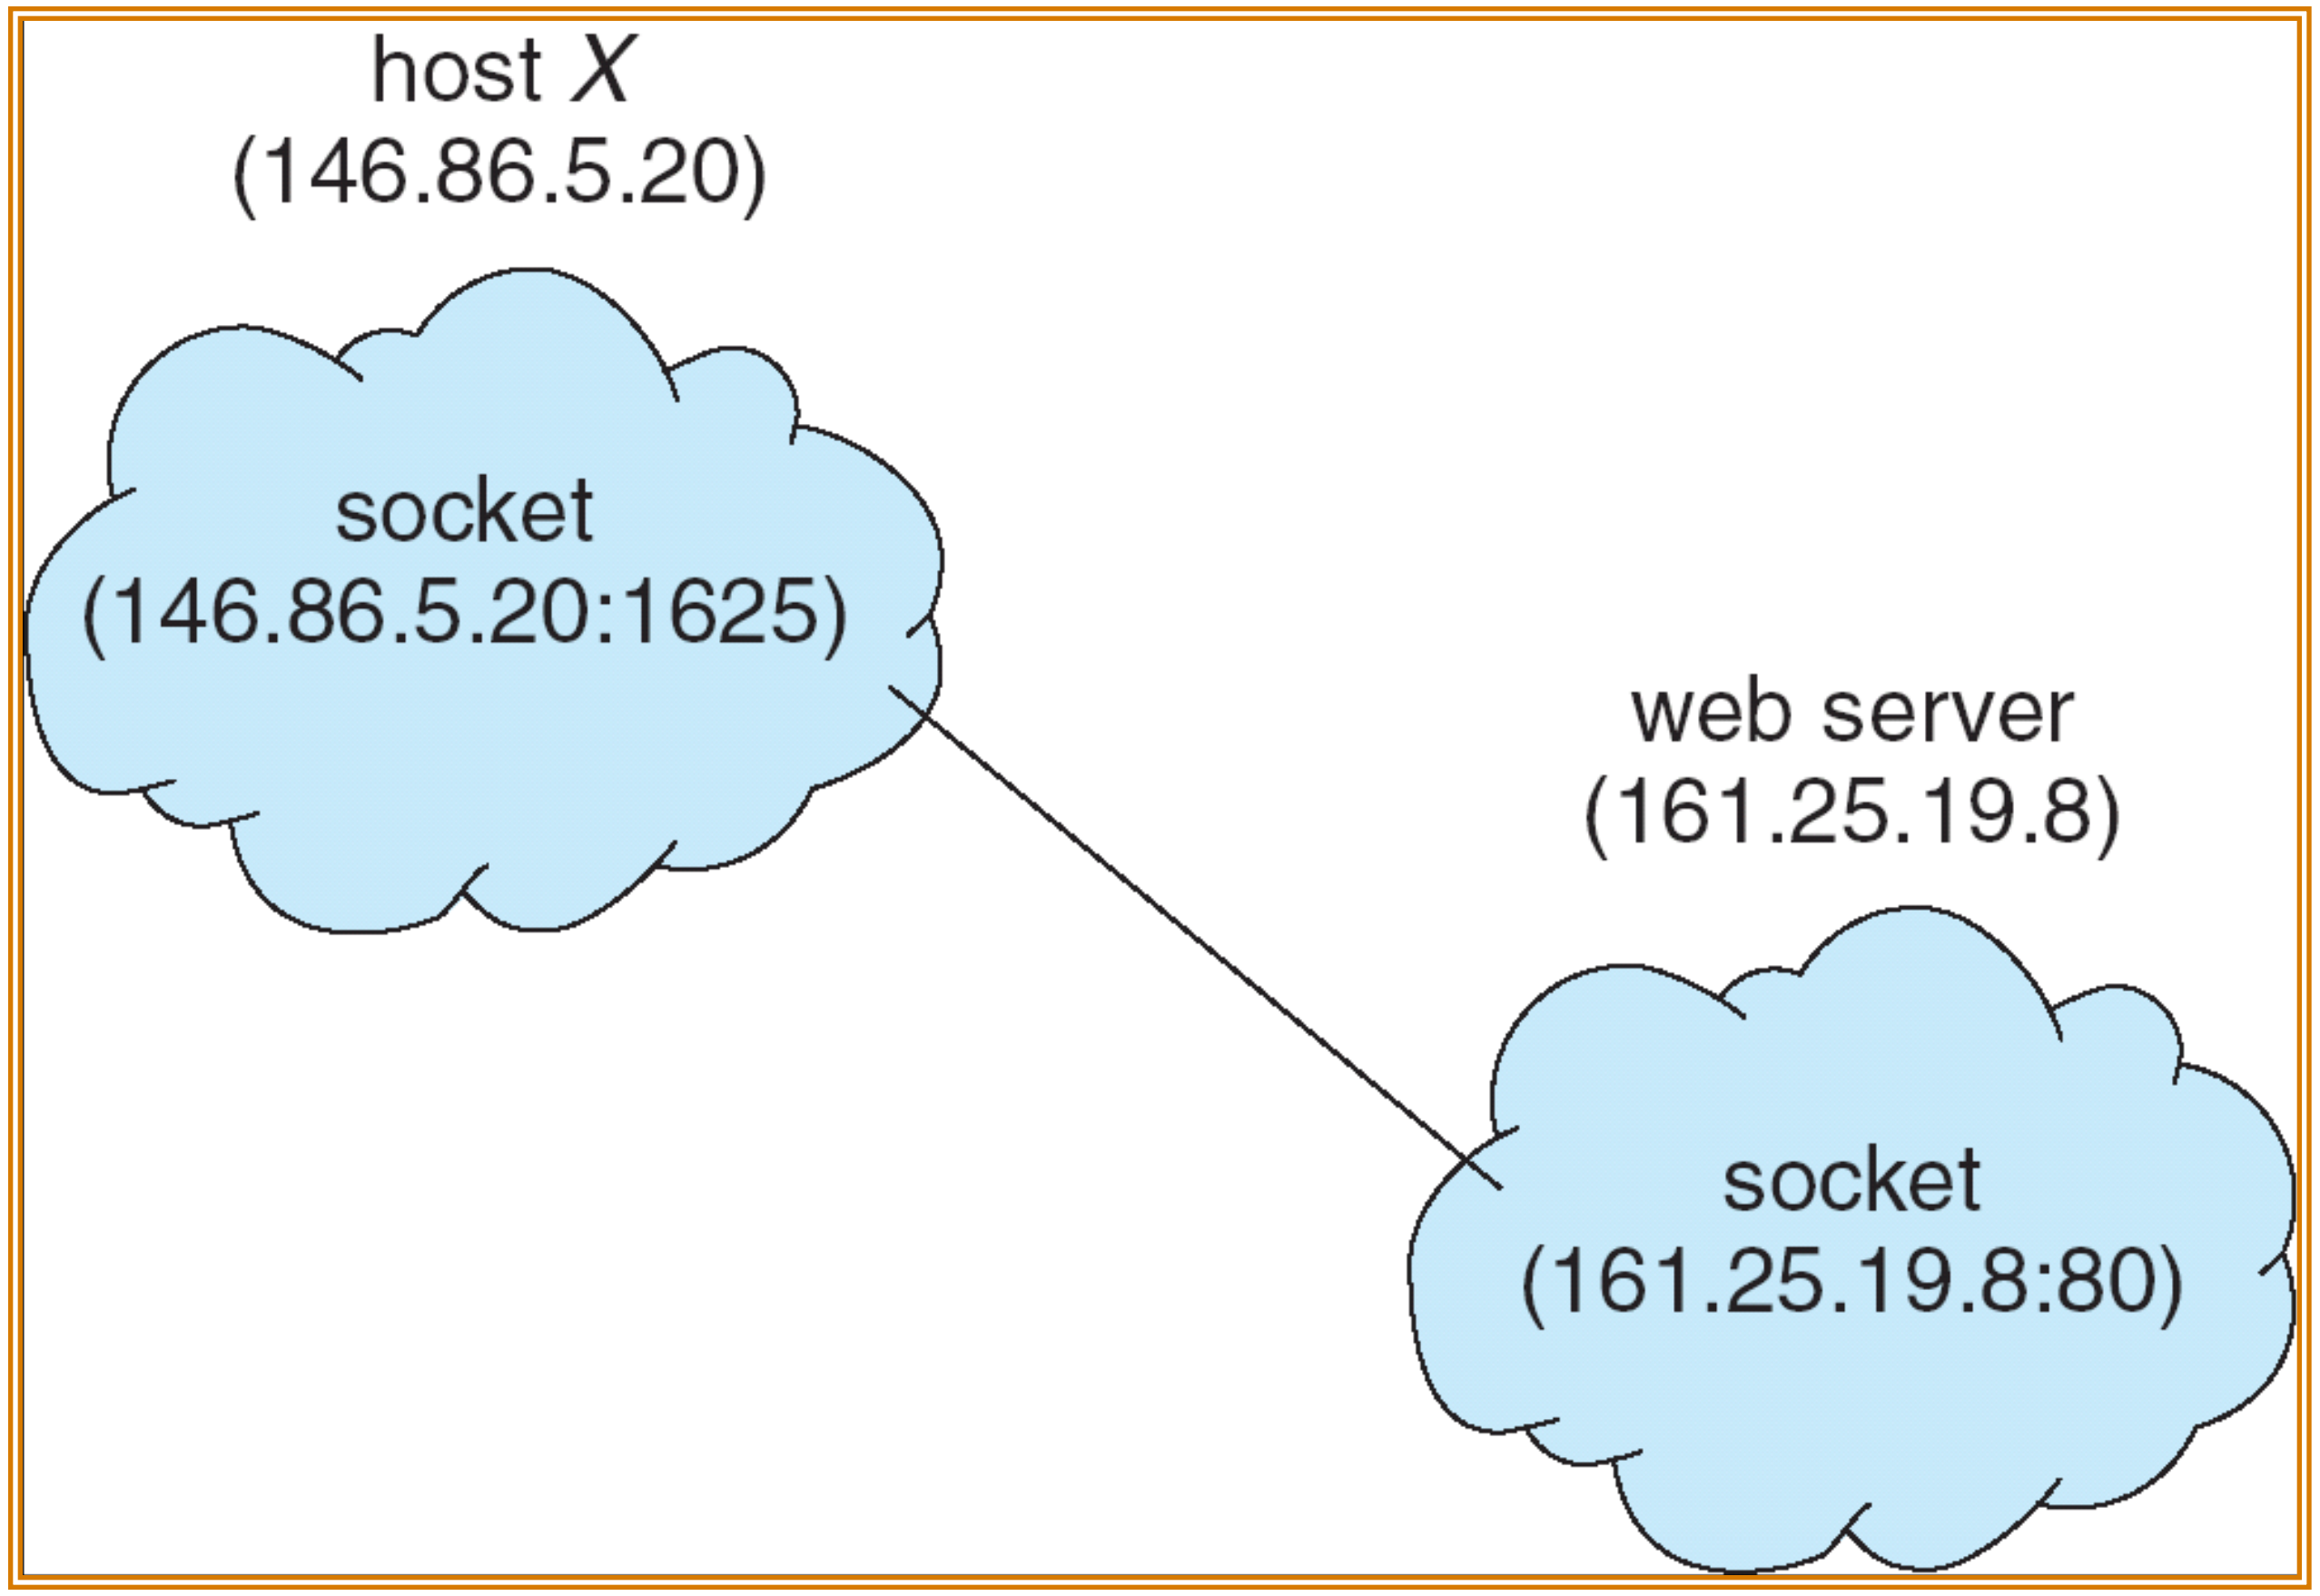

Remote Procedure Calls

- Remote procedure call (RPC) abstracts procedure calls between processes on networked systems.
- **Stubs** – client-side proxy for the actual procedure on the server.
- The client-side stub locates the server and *marshalls* the parameters.
- The server-side stub receives this message, unpacks the marshalled parameters, and performs the procedure on the server.

Execution of RPC

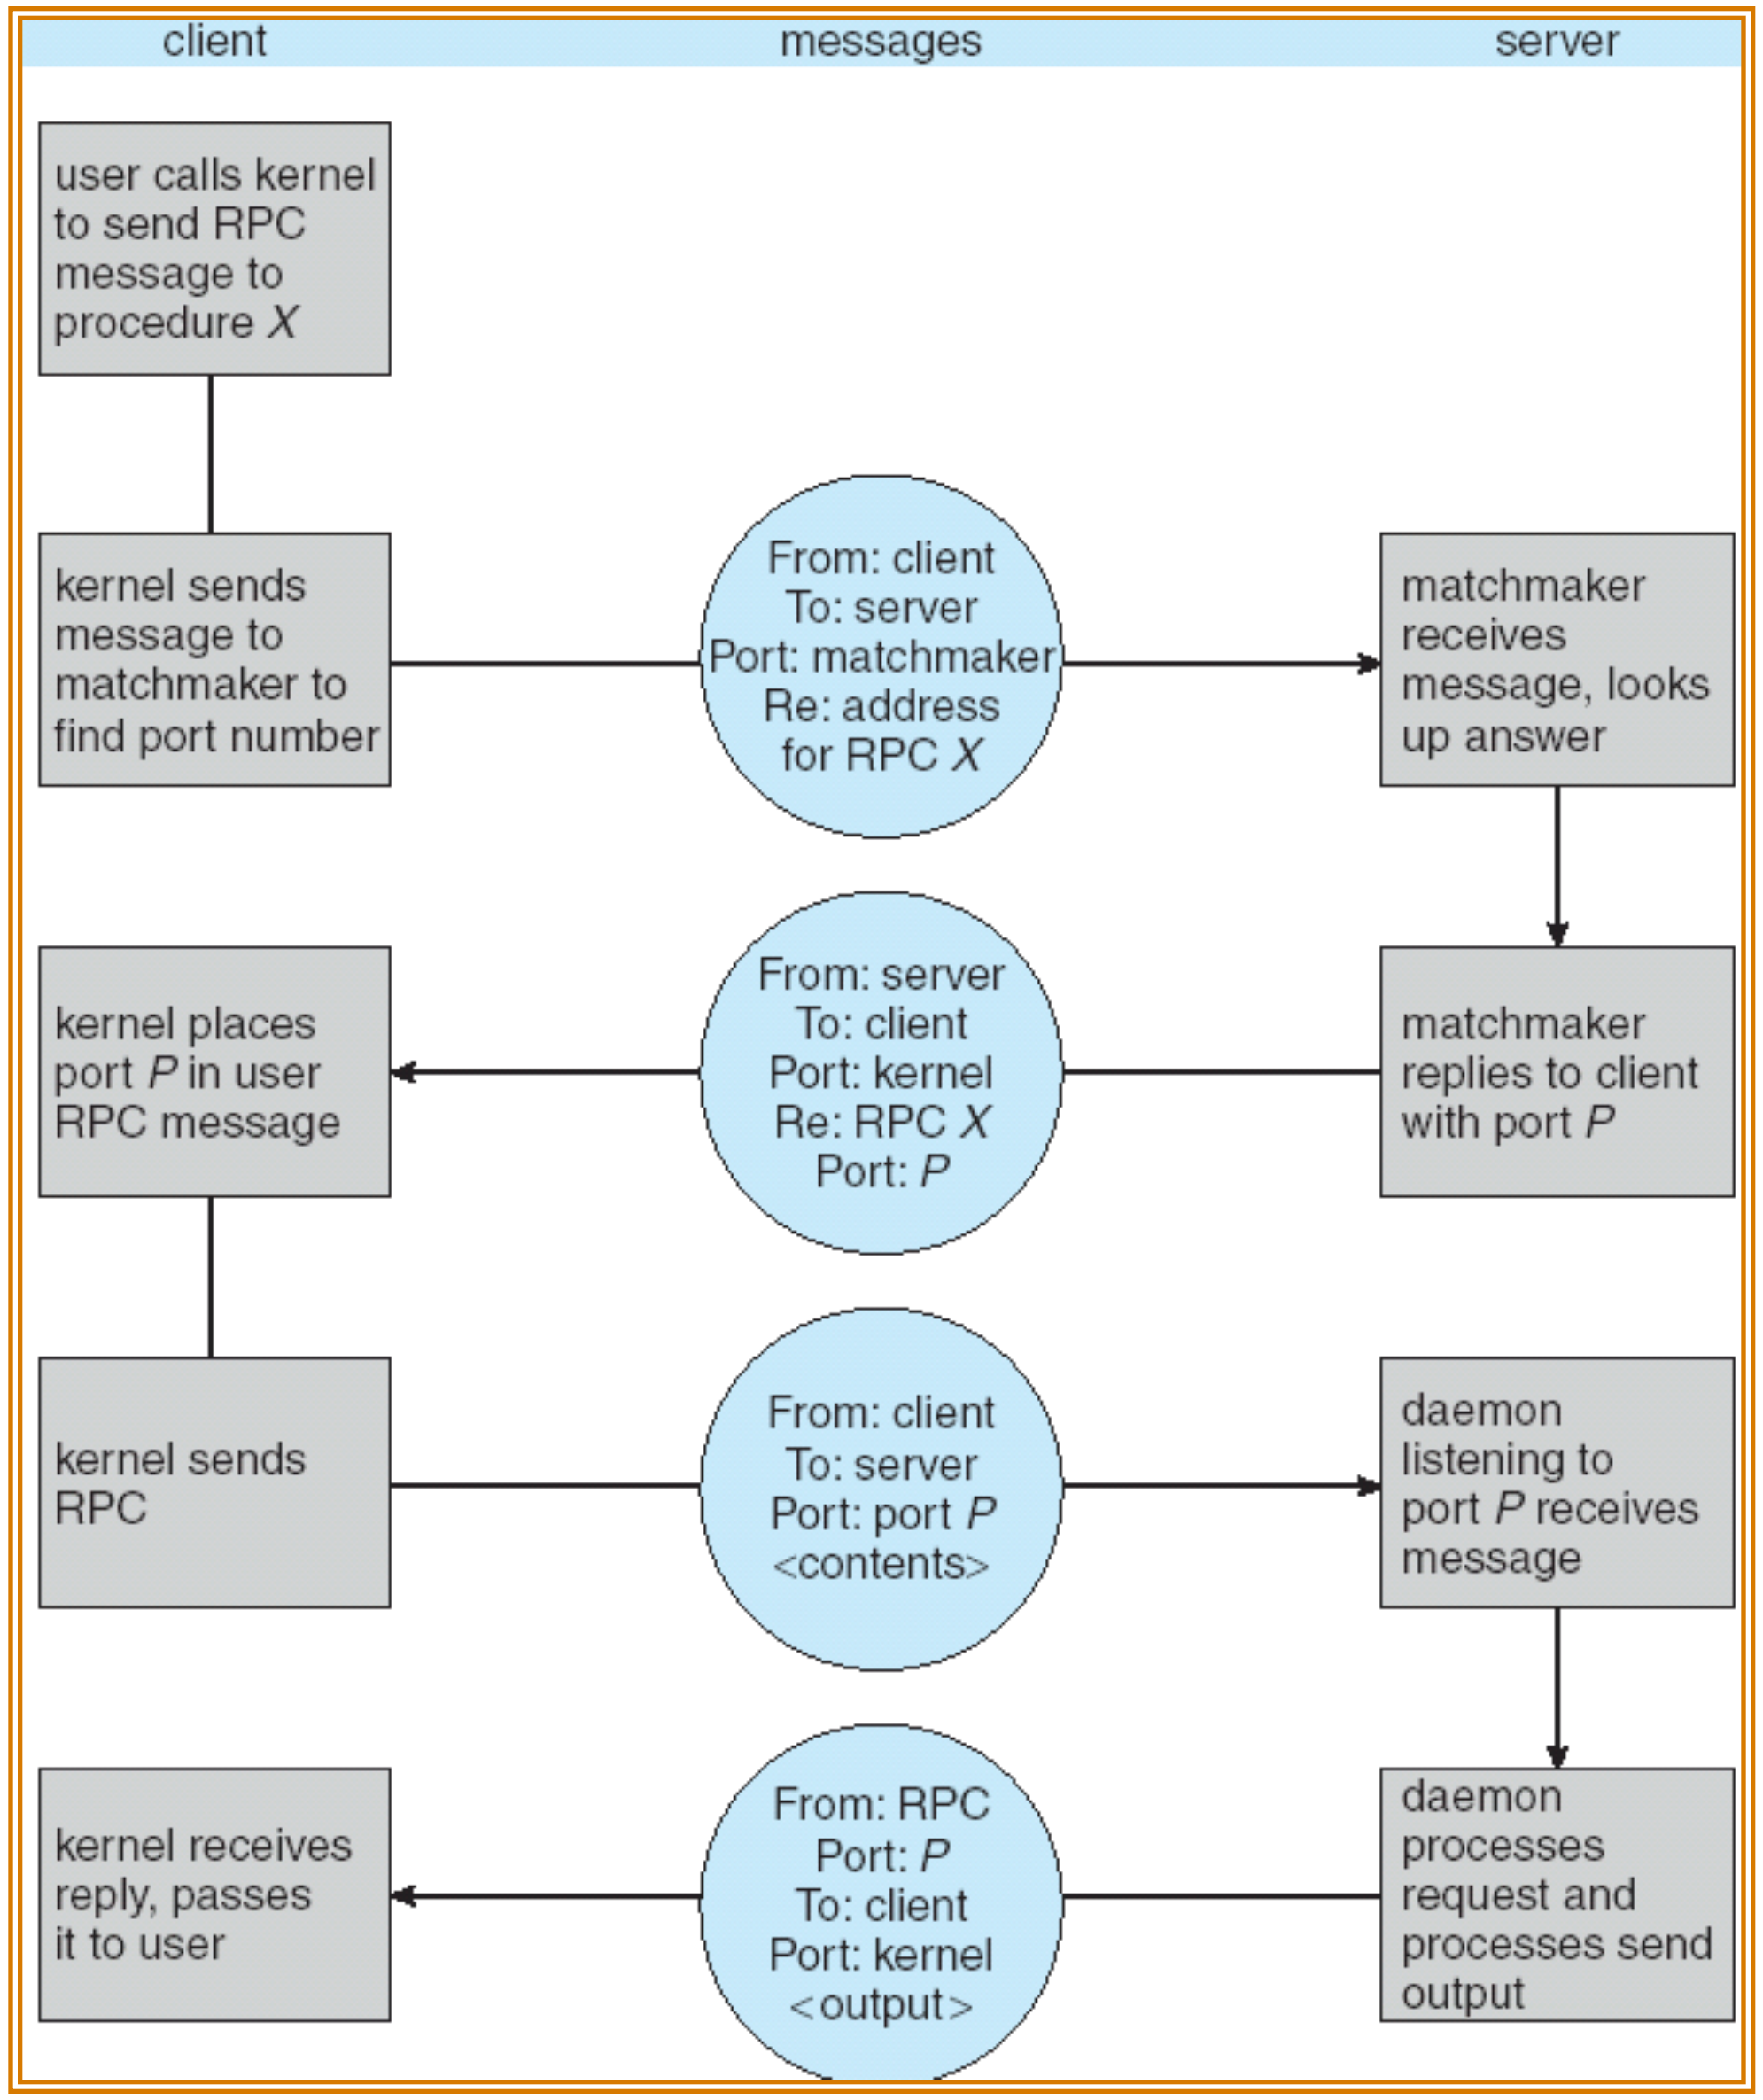
client
messages
server
user calls kernel to send RPC message to procedure *X*
kernel sends message to matchmaker to find port number
From: client To: server Port: matchmaker Re: address for RPC *X*
matchmaker receives message, looks up answer
matchmaker replies to client with port *P*
From: server To: client Port: kernel Re: RPC *X* Port: *P*
kernel places port *P* in user RPC message
kernel sends RPC
From: client To: server Port: port *P* <contents>
daemon listening to port *P* receives message
daemon processes request and processes send output
From: RPC Port: *P* To: client Port: kernel <output>
kernel receives reply, passes it to user

Marshalling Parameters

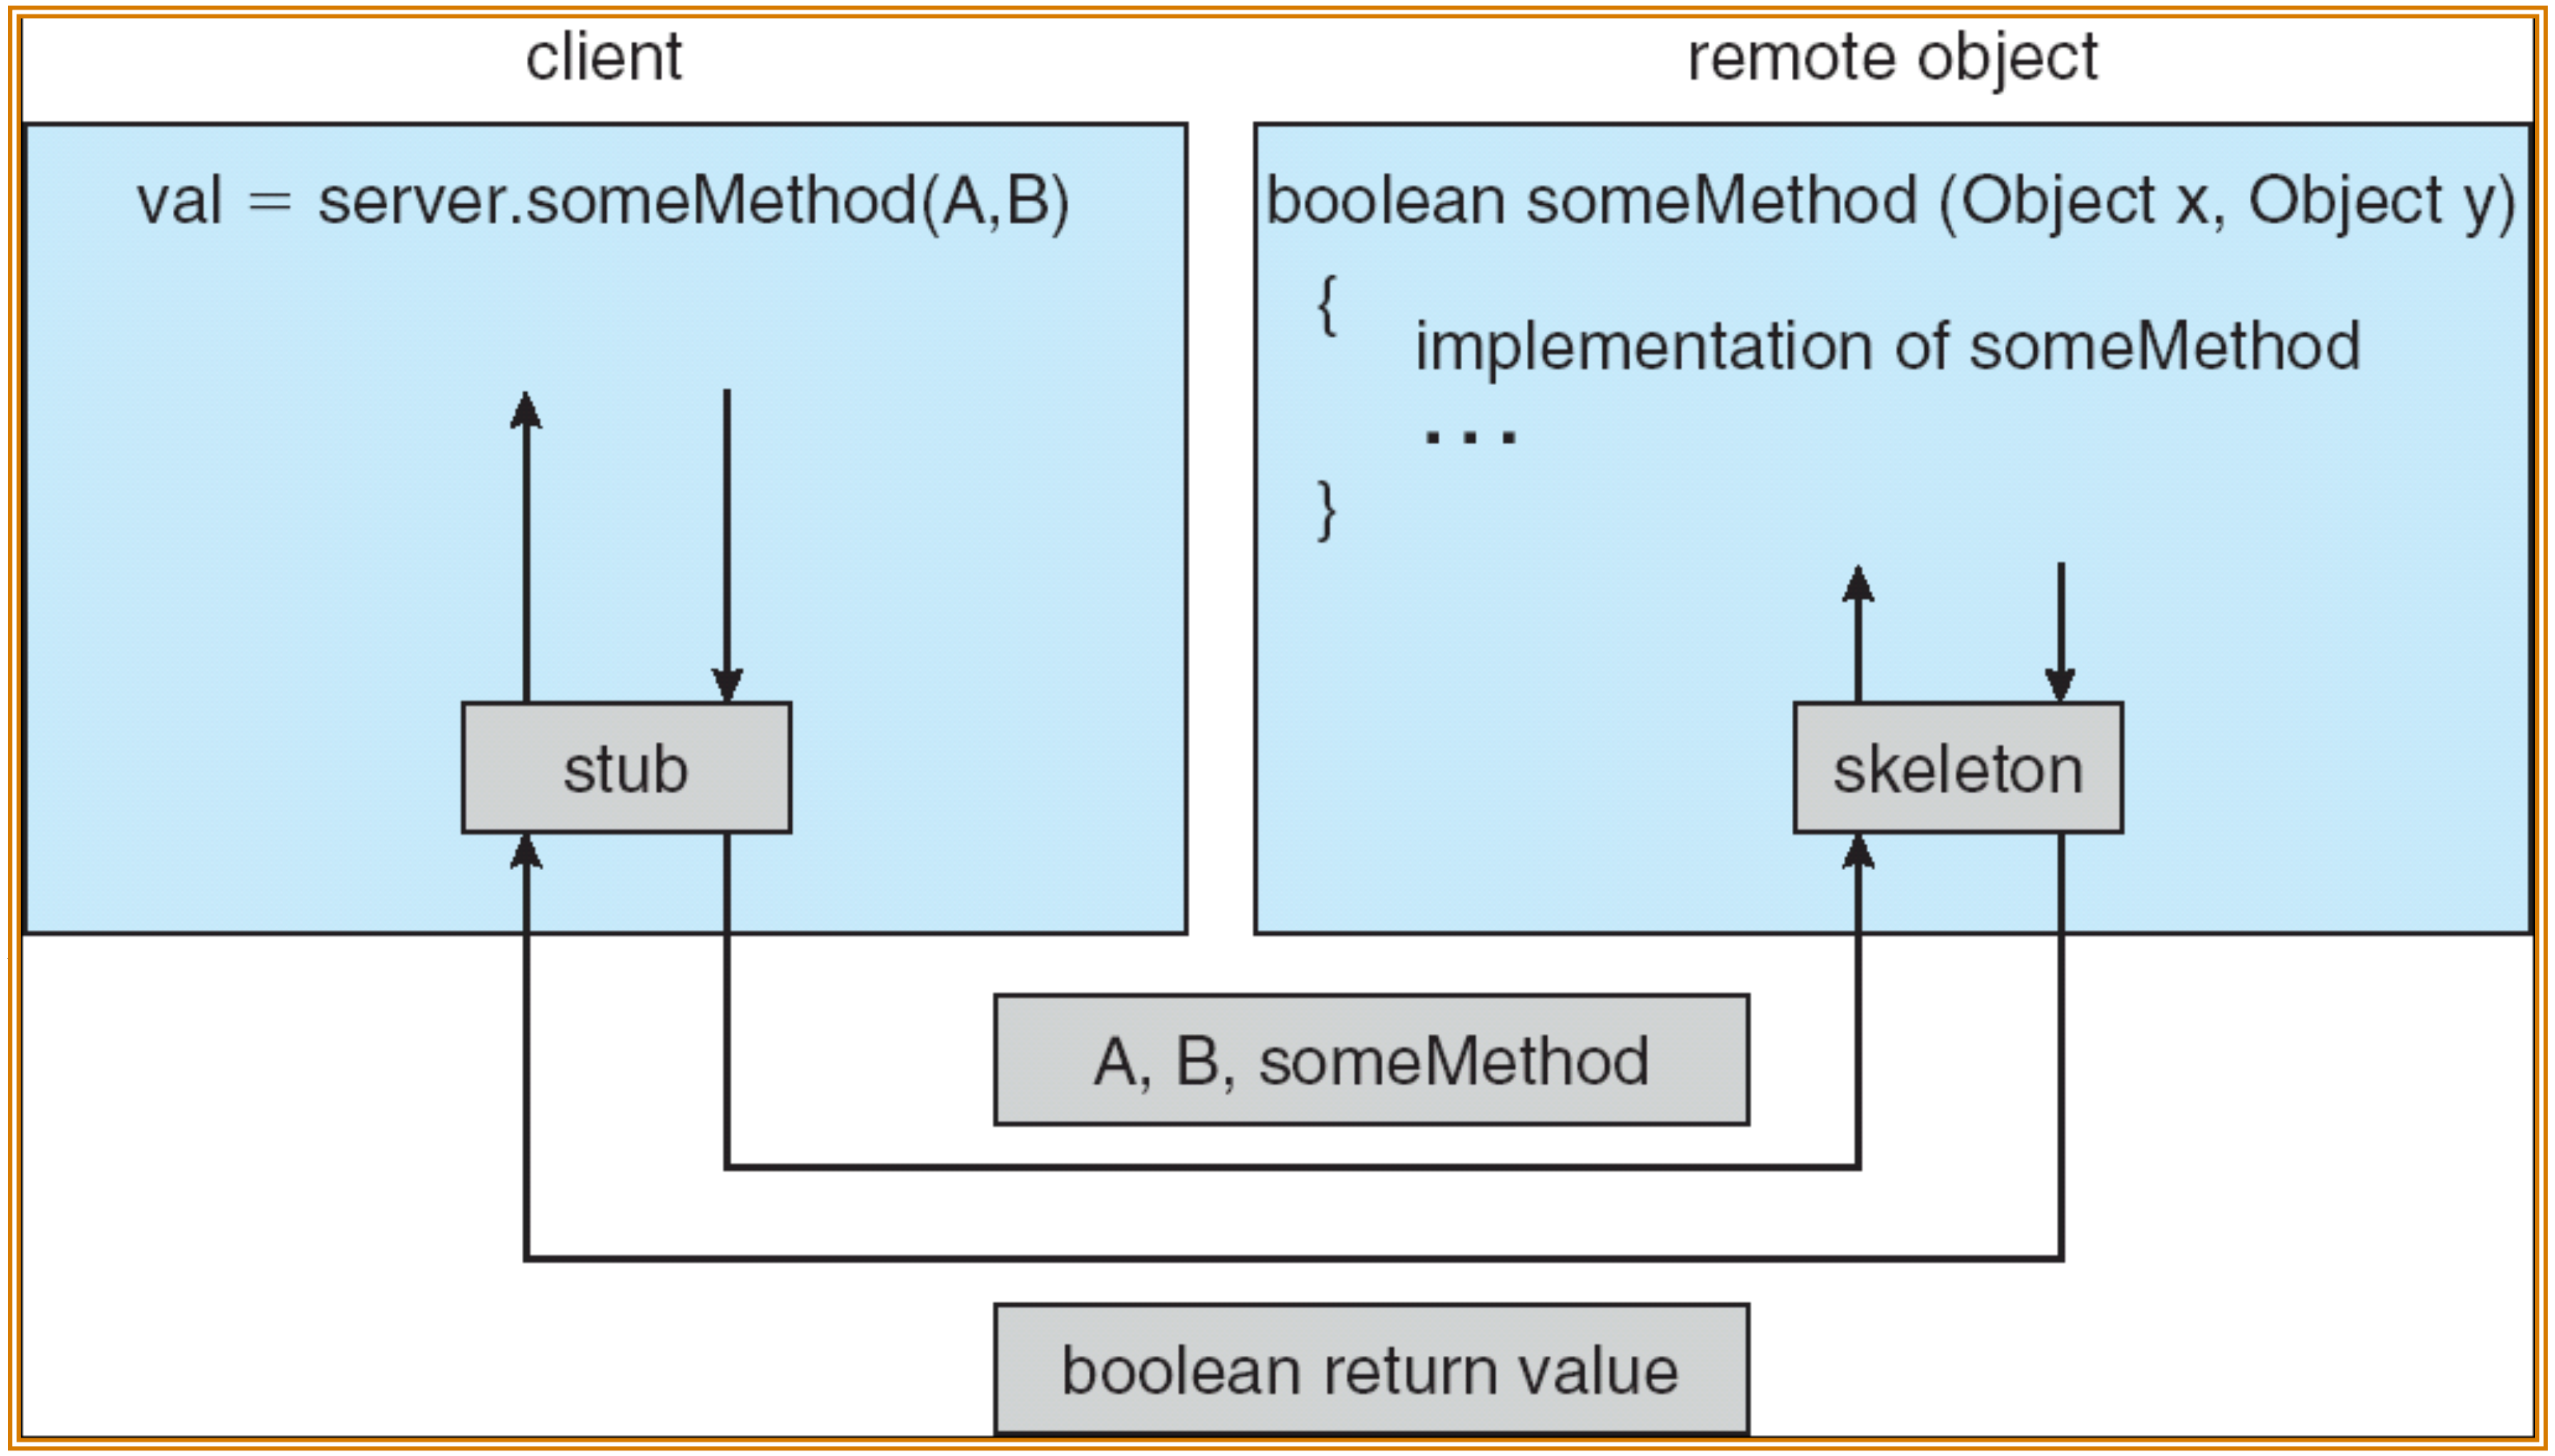
client
remote object
val = server.someMethod(A,B)
boolean someMethod (Object x, Object y)
{
implementation of someMethod
. . .
}
stub
skeleton
A, B, someMethod
boolean return value