



Mapúa University

School of Electrical, Electronics and Computer Engineering

Introduction to Embedded Systems COE185P/ E01

Discrete LED

Experiment No.1

Submitted By:

Sardina, Kent Johnric M.

Submitted To:

Engr. Jocelyn Villaverde



I. Introduction

MyRio provides educators with an embedded, WiFi-enabled solution to deliver an engaging approach to designing imaginative capstone projects (via National Instruments), It is used to develop applications that utilize its onboard FPGA and microprocessor. LabVIEW is a system-design platform and development environment for a visual programming language from NI.

LED is a semiconductor device that emits visible light and specialized type of diode as it has similar electrical characteristics to a PN junction diode. RGB LED combine the three colors RED, BLUE and GREEN to produce 16 million hues of light.

II. Objectives

1. Describe the essential concepts related to LEDs:
 - An LED is a diode that permits only one-way current,
 - The LED forward-bias voltage drop varies with color (wavelength),
 - The interface circuit design depends on knowledge of the DIO output resistance and source voltage,
 - LEDs may be direct-connected to the DIO under some circumstances, and
2. Select a suitable current-limiting resistor (or no resistor) based on the LED type.

III. Materials and Components

- Jumper Wires
- 1 LED
- NI myRio kit
- MXP(myRio expansion port)
- 1 Static Watches
- 1 Resistor 470 Ohms
- Breadboard

IV. PROCEDURE

Step 1. Connect the LED and Resistor based on this picture.

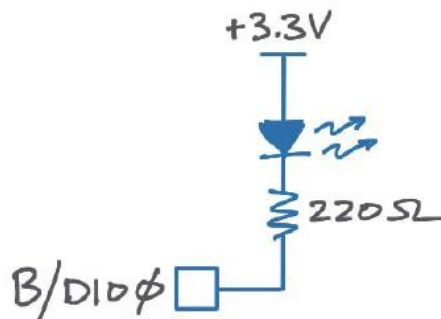


Figure 1. LED and RESISTOR connections

Step 2. Connect the breadboard to myRIO pins, connect the anode to 3.3v and connect the other end to B/DIO0 pin on the myRIO.

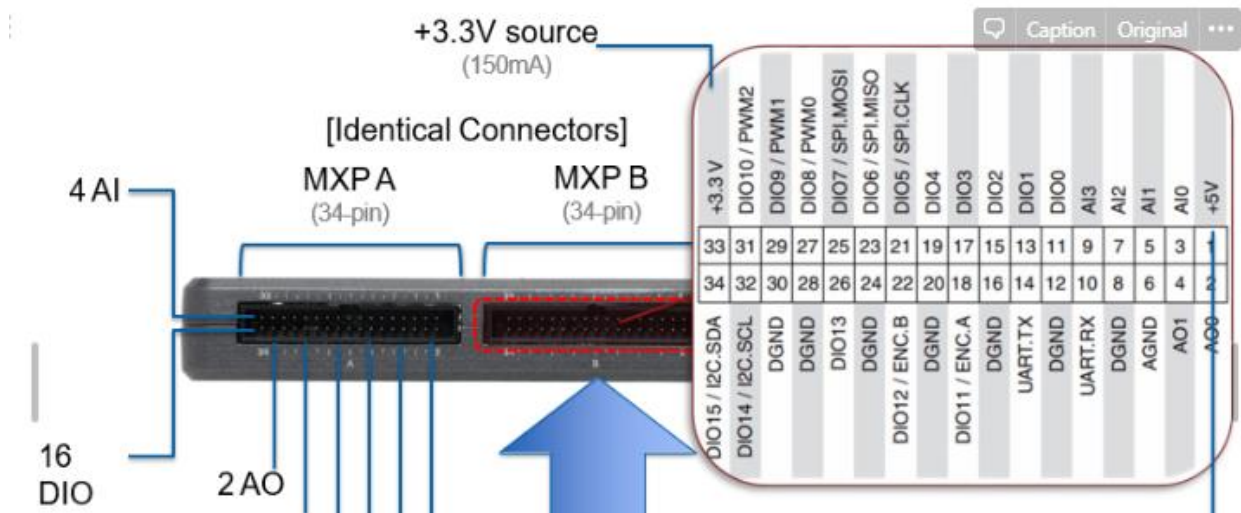


Figure 2. myRIO connection pins



Figure 3. Connected Pins during the experiment.



Step 3. Open LabVIEW and download the provided demo for LED. Then Simulate/Run the schematic for testing.

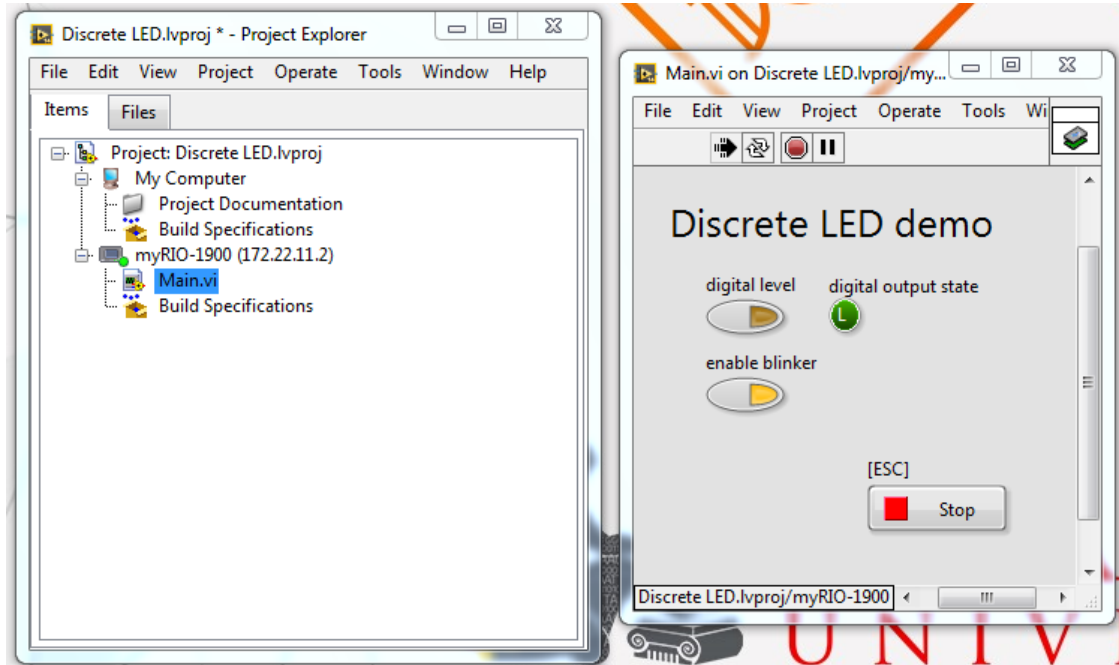


Figure 4. Discrete LED demo Schematic

Step 4. Test the LED Blinking and test the buttons in the schematic.

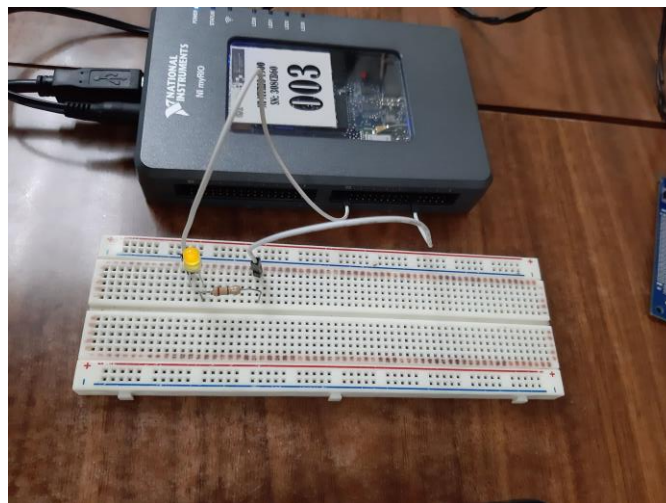


Figure 5. Blinking LED

Basic Modifications

Step 1. Adding a control to the front-panel

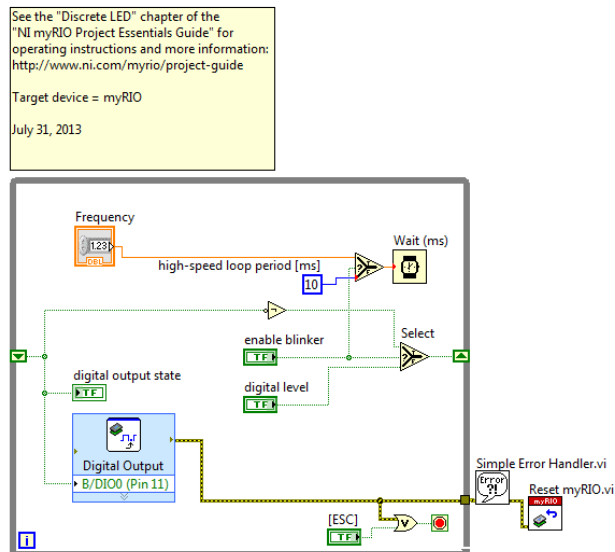


Figure 6. Adding Frequency Control

Step 2. Connect the control to the timer multiplexer

Step 3. Test the front-panel

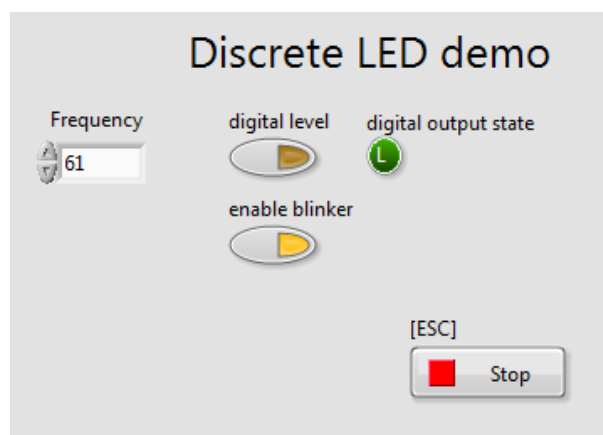


Figure 7. Front-Panel Frequency Control

V. Results and Discussion

The first part of the experiment is all about blinking the LED, the front-panel has 2 buttons these are DIGITAL LEVEL which you set if the LED is HIGH or LOW and ENABLE BLINKER which blinks the LED.

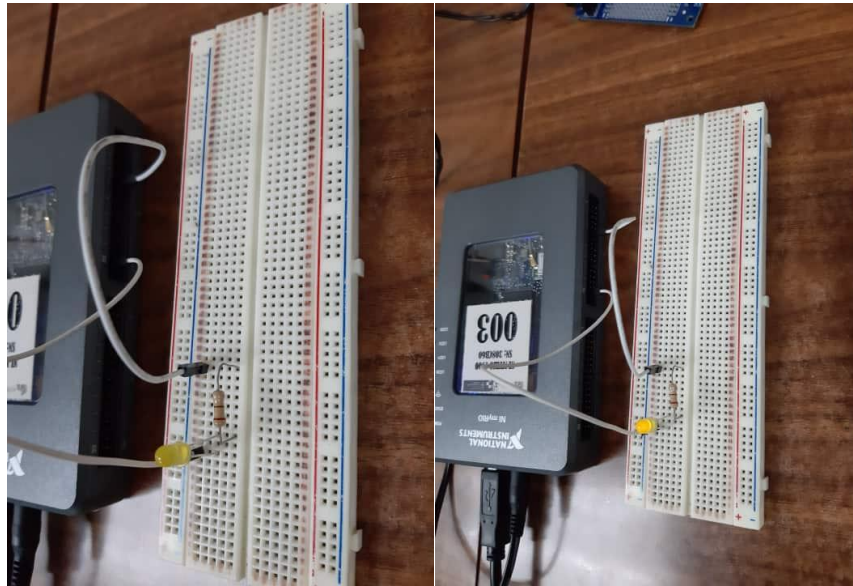


Figure 8. LED at LOW

Figure 9. LED at HIGH

Basic Modifications I choose add a front panel that control the frequency of the blinking LED, first I add control then connected it to the timer. When the frequency is at 0 the blinking becomes imperceptible when the frequency is at 10 it's very fast but as frequency increases the blinking becomes slower.



VI. Conclusion

This experiment was to learn to use the myRIO and LabVIEW program with the help of a LED. All of the activities in this experiment works without any errors, therefore, I conclude that this experiment was a success. LEDs only allow current through one direction. In this experiment, I achieved all the objectives needed in this experiment. While performing the experiment, I conclude that the LED's are forward biased and a one-way current. When the Frequency is at 0, when the frequency is at 10 the blinking of a LED is very fast but as frequency increase the blinking becomes slower, therefore, I conclude that at 0 frequency the blinking becomes imperceptible.