


# Config Dial-Peer Cisco

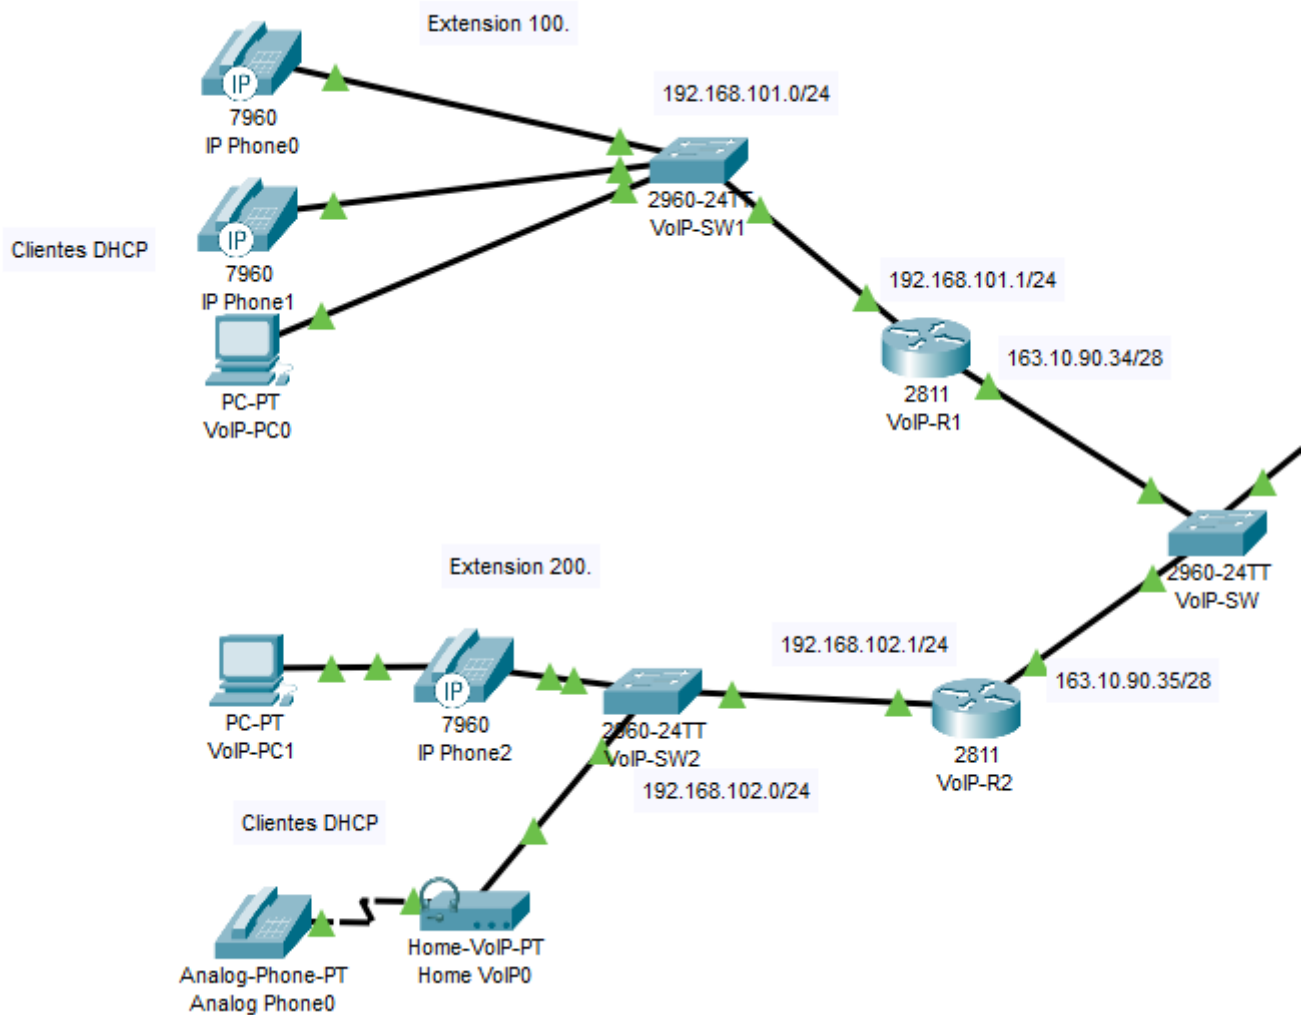

We have to communicate these two separated voice networks

- Network 1 has these phone numbers [1000, 1001, 1002]
- Network 2 has these phone numbers [2000, 2001]

To allow the communication between them do the following:

In the router VoIP-R1

```
VoIP-R1(config)#dial-peer voice 1 voip
VoIP-R1(config-dial-peer)#destination-pattern 200.
VoIP-R1(config-dial-peer)#session ipv4:163.10.90.35
```

In the router VoIP-R2

```
VoIP-R2(config)#dial-peer voice 1 voip
VoIP-R2(config-dial-peer)#destination-pattern 100.
VoIP-R2(config-dial-peer)#session ipv4:163.10.90.34
```