
732720106037

KESHUVARDHAN V

https://wokwi.com/projects/364317995863499777

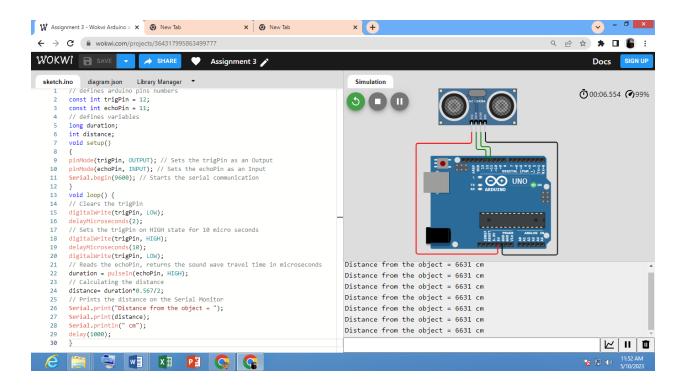

SKETCH.INFO

```
// defines arduino pins numbers
const int trigPin = 12;
const int echoPin = 11;
// defines variables
long duration;
int distance;
void setup()
{
   pinMode(trigPin, OUTPUT); // Sets the trigPin as an Output
   pinMode(echoPin, INPUT); // Sets the echoPin as an Input
   Serial.begin(9600); // Starts the serial communication
}
void loop() {
   // Clears the trigPin
   digitalWrite(trigPin, LOW);
   delayMicroseconds(2);
```

```
// Sets the trigPin on HIGH state for 10 micro seconds
digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
// Reads the echoPin, returns the sound wave travel time in microseconds
duration = pulseIn(echoPin, HIGH);
// Calculating the distance
distance= duration*0.567/2;
// Prints the distance on the Serial Monitor
Serial.print("Distance from the object = ");
Serial.print(distance);
Serial.println(" cm");
delay(1000);
}
```