

USB-C · protection · 3.3 V supply

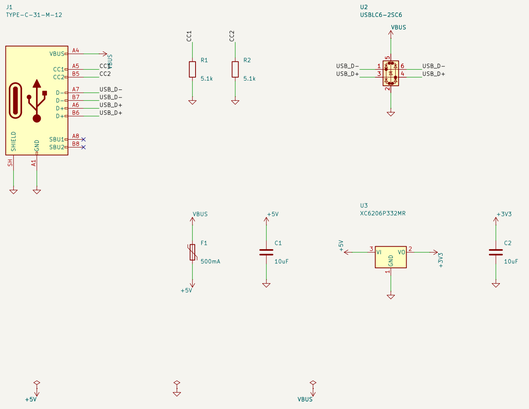


CC1/CC2: 5.1 kΩ sink pull-downs. F1: 0.5 A hold-current PTC.


RP2040 · QSPI flash · crystal · boot/reset · decoupling

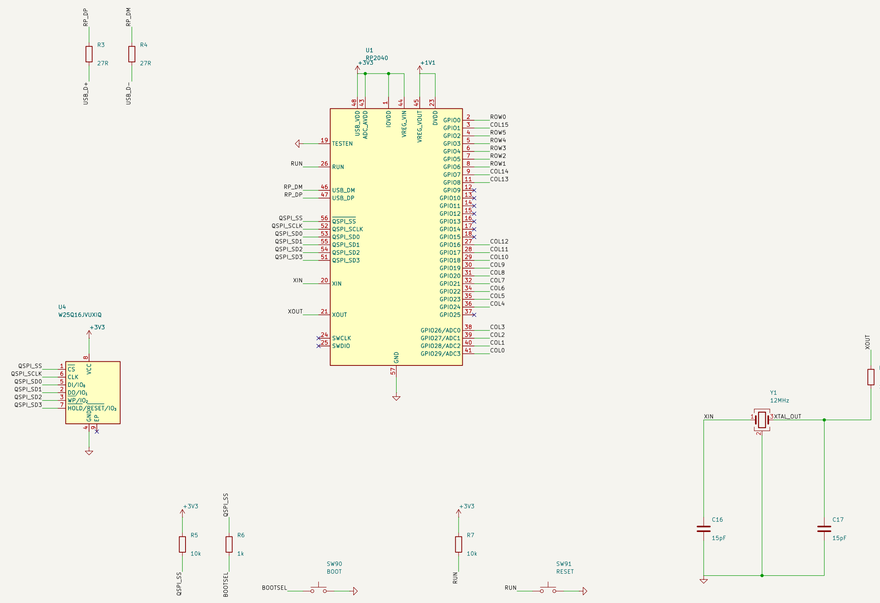

+3V3 decoupling



+1V1 decoupling





Hold BOOT while connecting USB (or press RESET while holding BOOT) to get the RPI-RP2 UF2 drive.
A blank board enumerates as RPI-RP2 automatically. Test pads: RUN, +3V3, GND, +5V.

Key matrix · 82 × Kailh CPG151101S11 hot-swap sockets · 1N4148W · 6 rows × 16 columns · COL2ROW

All SMD parts on the bottom side (single-sided JLCPCB assembly)
RP2040 + USB-C, 82 Kailh CPG151101S11 hot-swap sockets, 6x16 COL2ROW matrix
Vamora — Kevin Le, Sammy DeGraaff, Mohammed-Mehdi Hamdaoui

Sheet: /	
File: Vamora75.kicad_sch	
Title: Vamora75 — 75% hot-swap keyboard, Windows ANSI	
Size: A1	Date: 2026-11-03
KiCad E.D.A. 10.0.6	Rev: 1.4
	Id: 1/1