




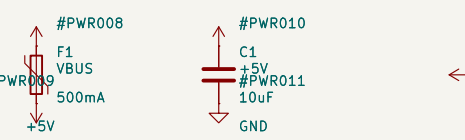
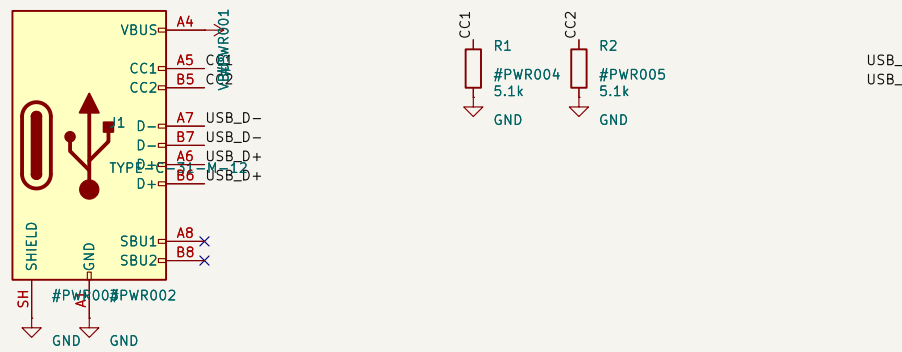

















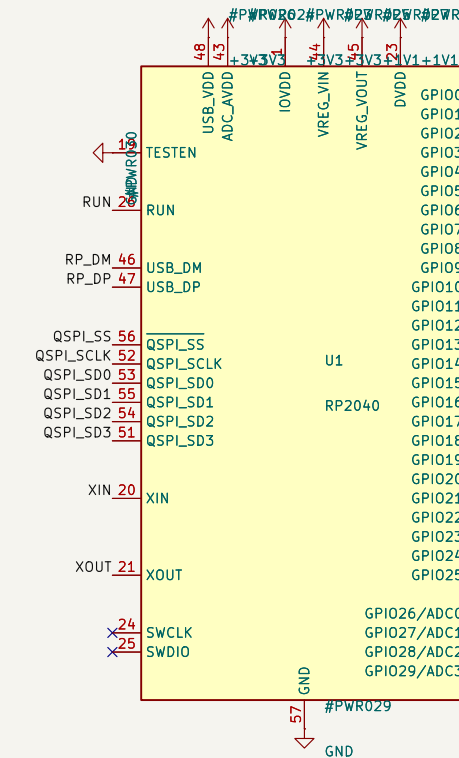



USB-C · protection · 3.3 V supply



CC1/CC2 5.1 kΩ = USB-C sink (works with C-to-C cables). PTC limits faults to 0.5 A.

RP2040 · 2 MB QSPI flash · 12 MHz crystal · boot/reset · SWD



Key matrix · 82 × Kailh CP6151101S11 hot-swap sockets · 1N4148W · 6 rows × 16 columns · COL2ROW

