



USB-C · protection · 3.3 V supply

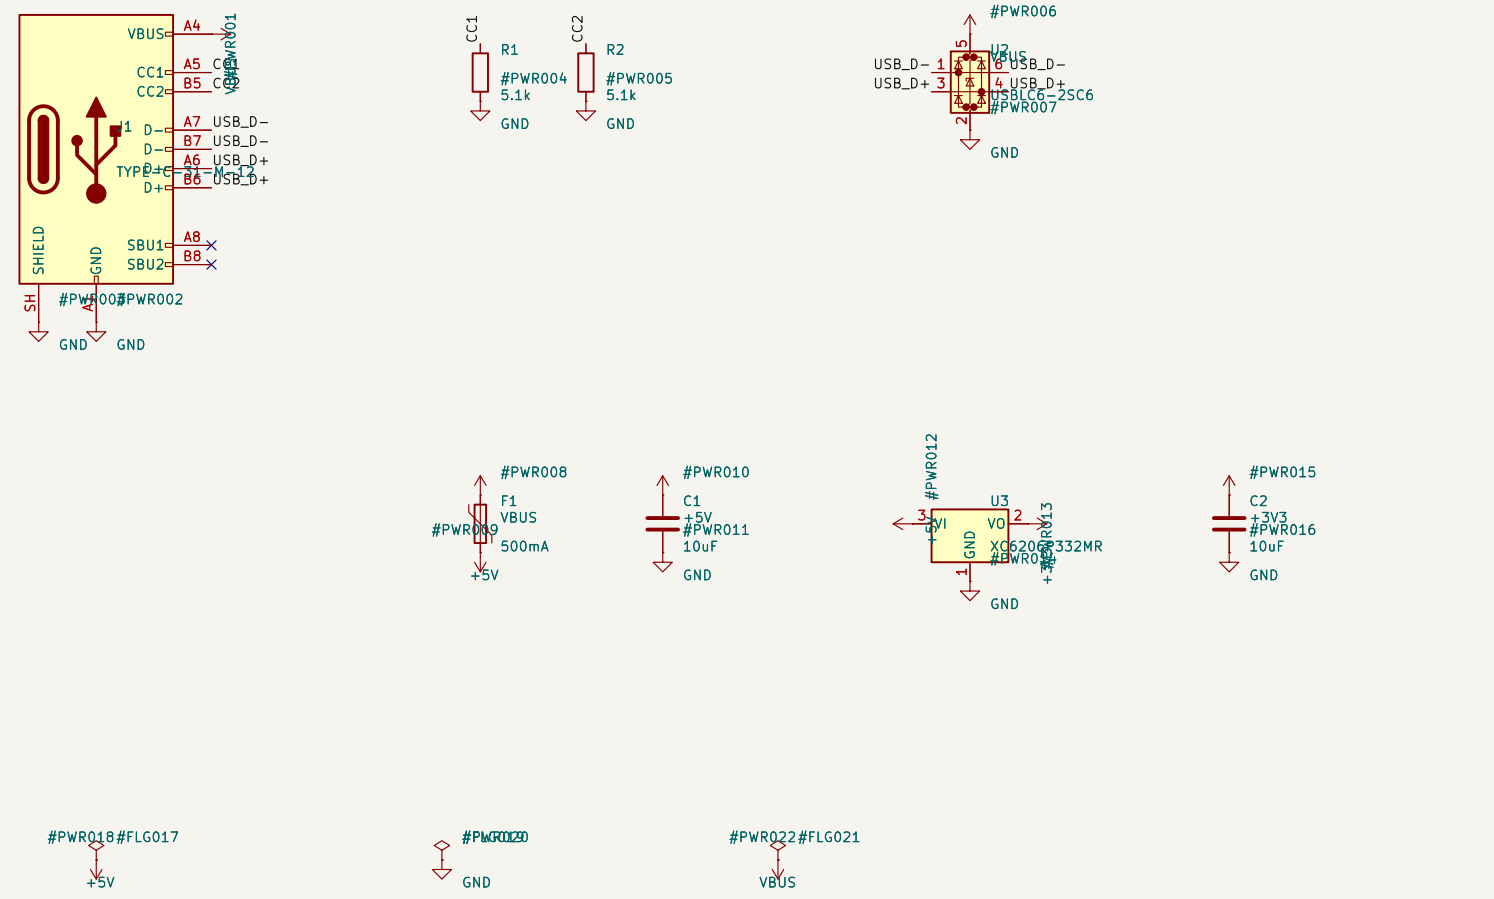


CC1/CC2 5.1 k Ω = USB-C sink (works with C-to-C cables). PTC limits faults to 0.5 A.

RP2040 · 2 MB QSPI flash · 12 MHz crystal · boot/reset · SWD

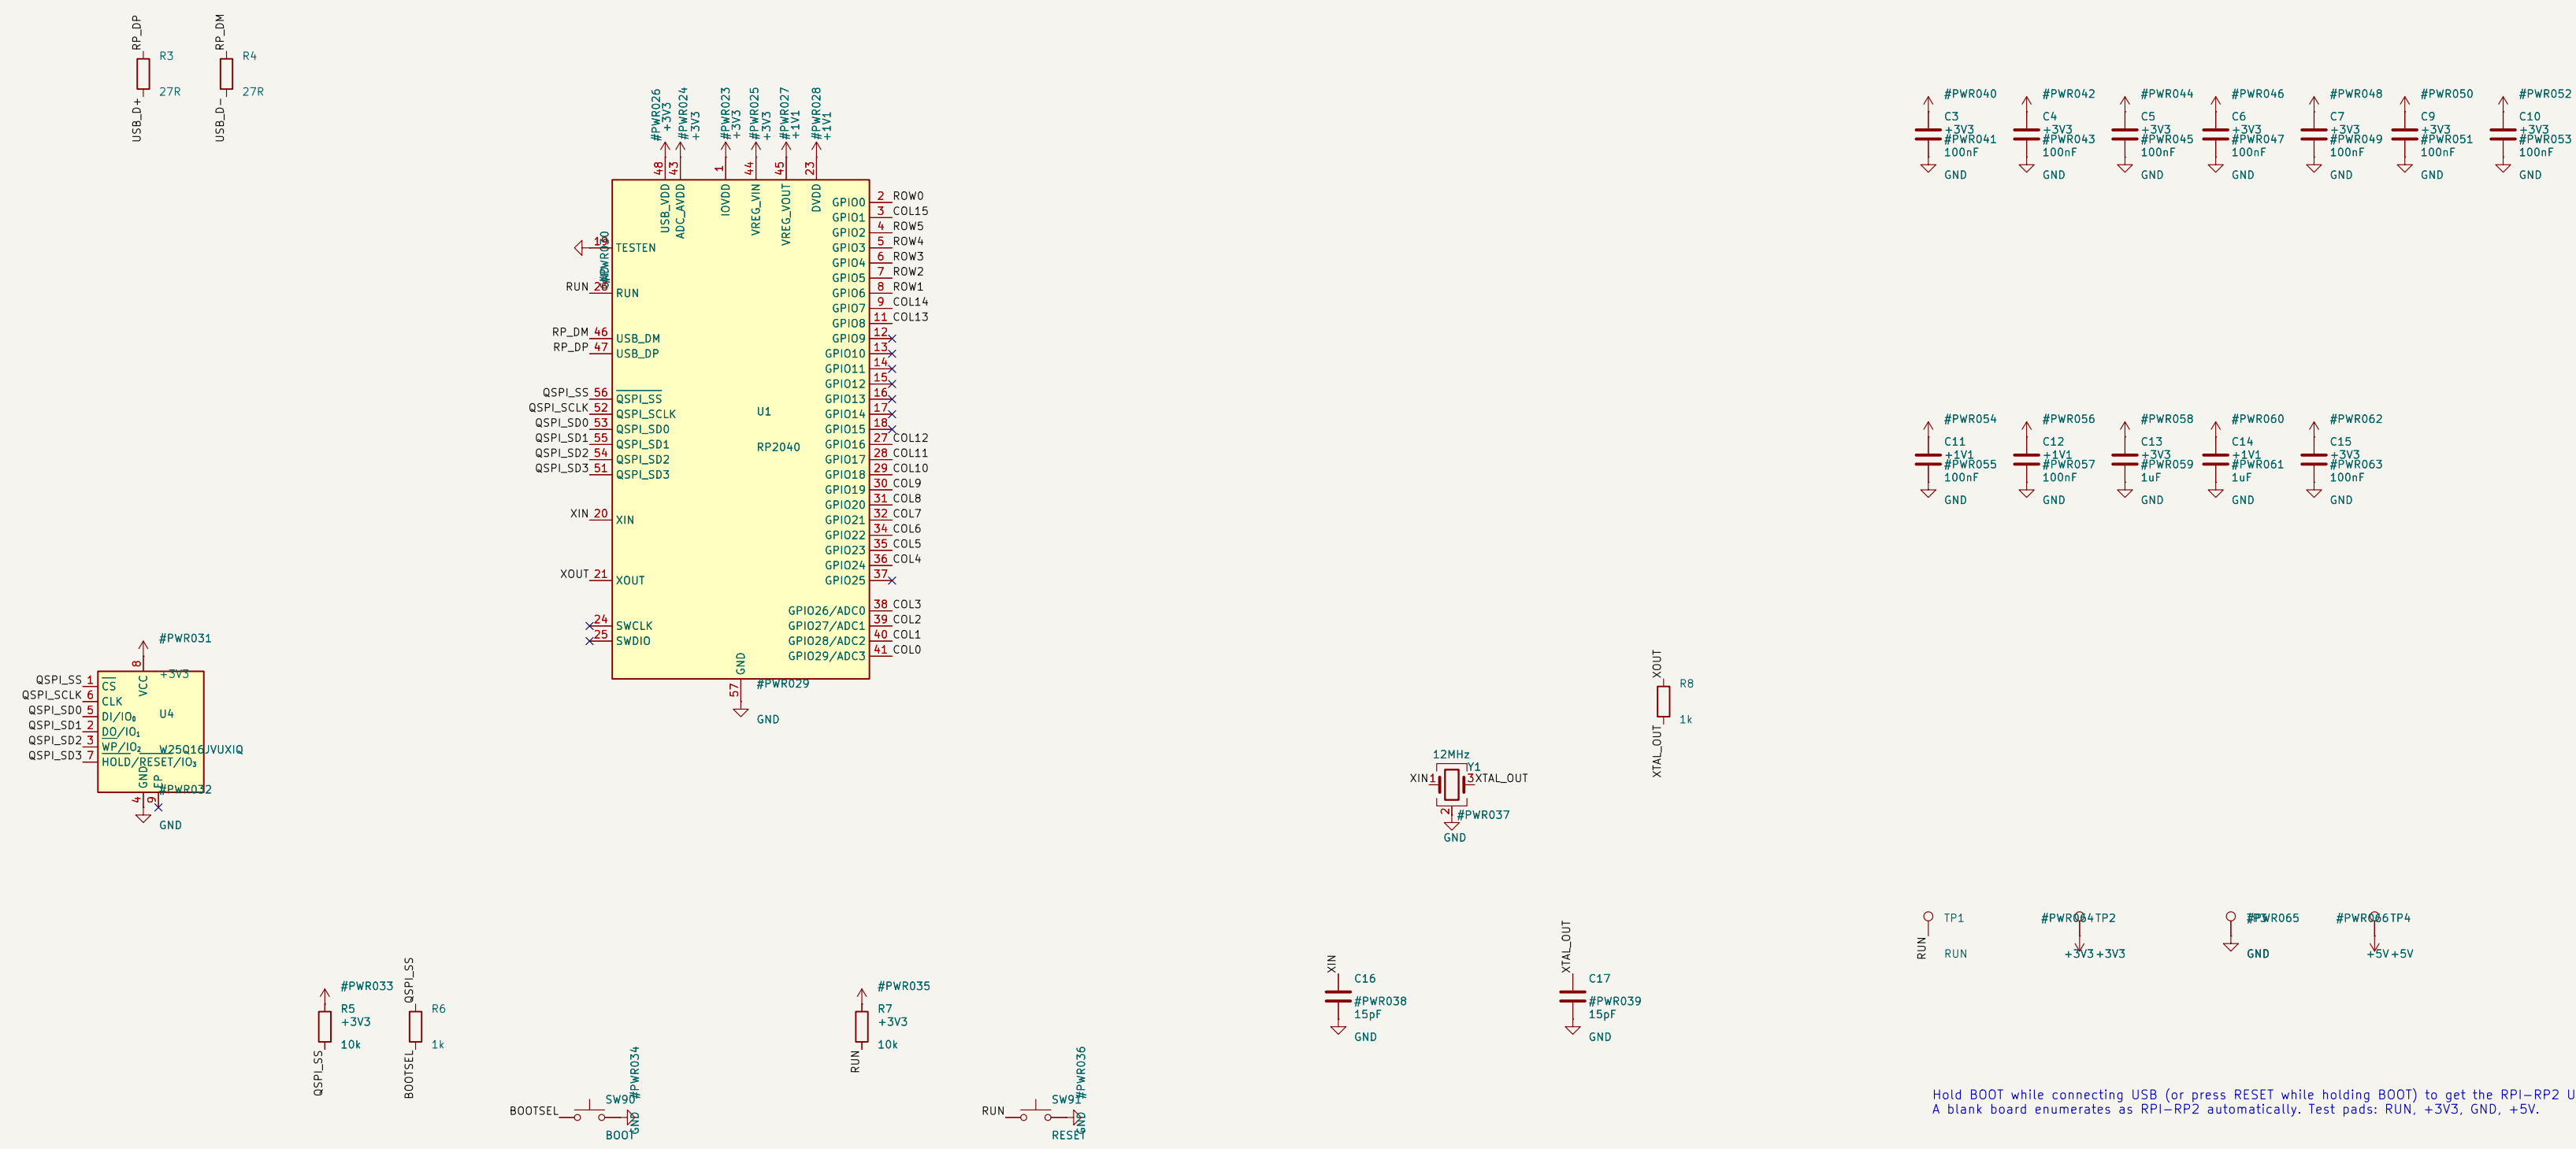

Hold BOOT while connecting USB (or press RESET while holding BOOT) to get the RPI-RP2 UF2 drive. A blank board enumerates as RPI-RP2 automatically. Test pads: RUN, +3V3, GND, +5V.

Key matrix · 82 × Kailh CPG151101S11 hot-swap sockets · 1N4148W · 6 rows × 16 columns · COL2ROW

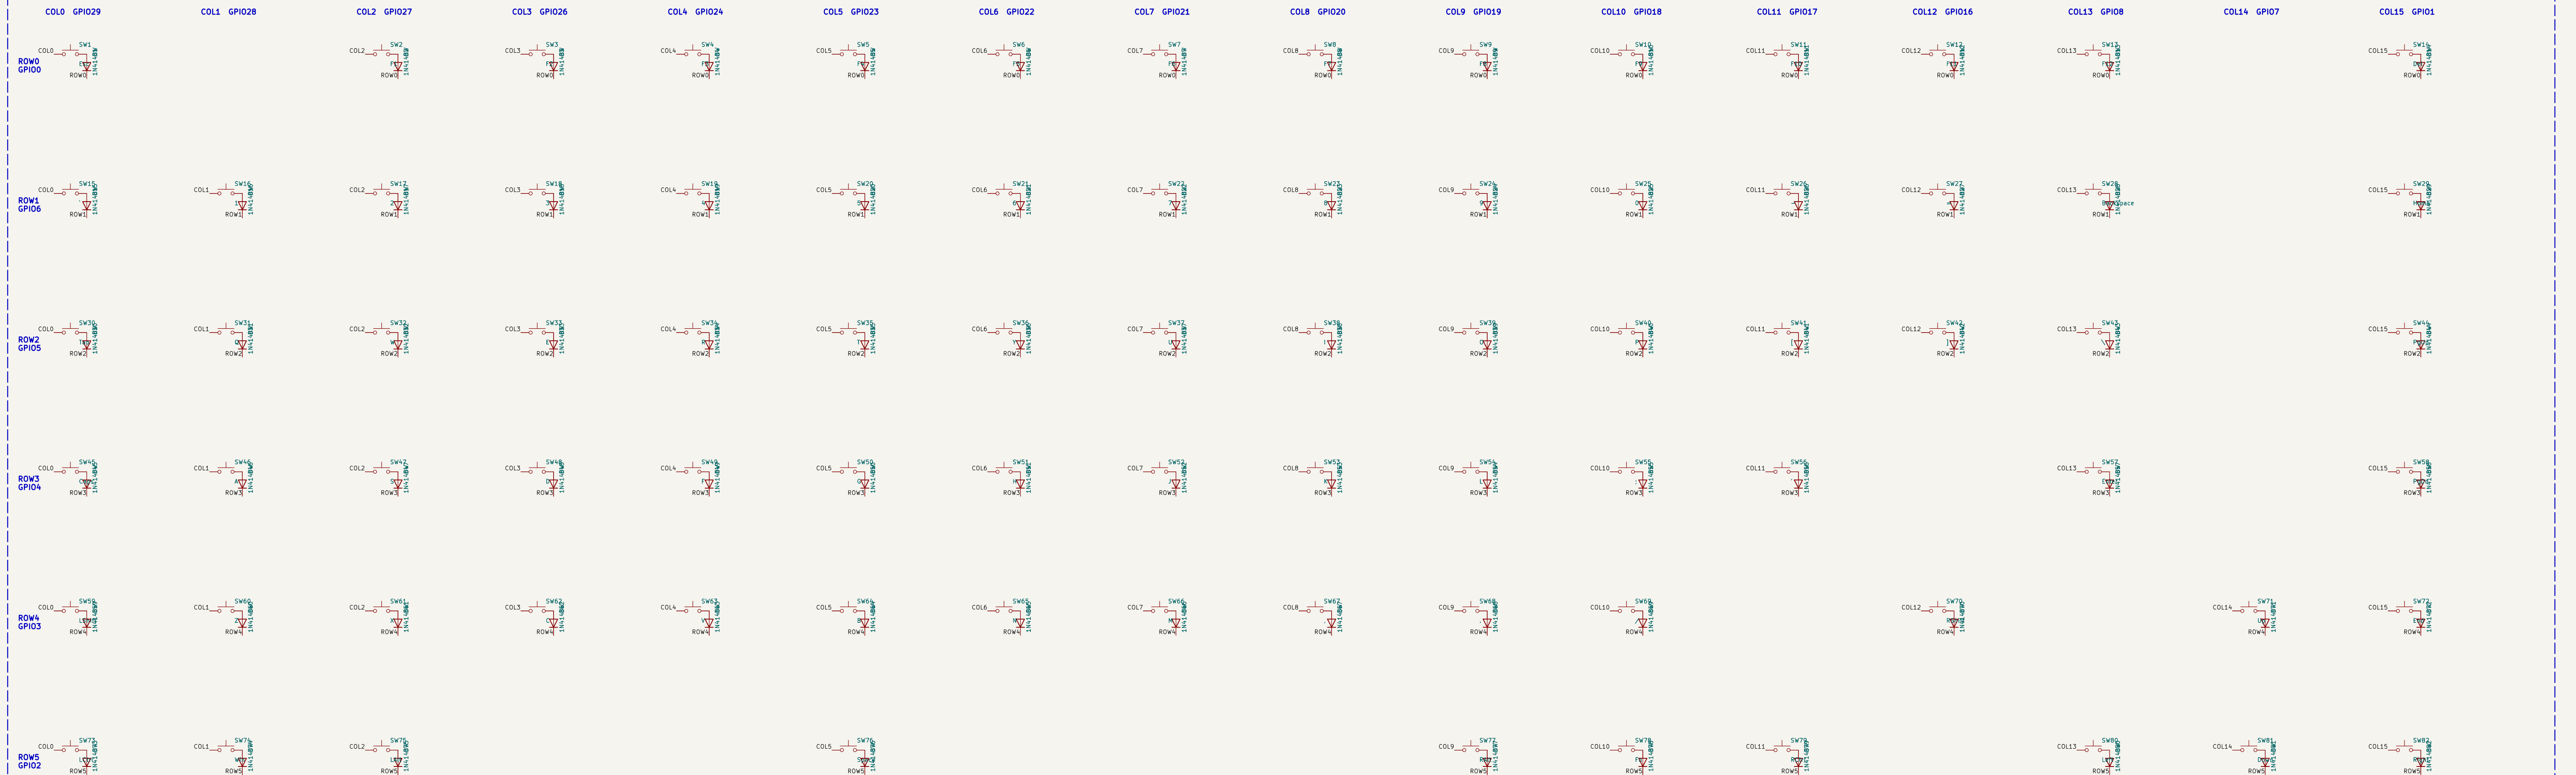

All SMD parts on the bottom side (single-sided JLCPCB assembly)
RP2040 + USB-C, B2 Kailin CPG151101S11 hot-swap sockets, 6x16 COL2ROW matrix
Vamora ~ Kevin Le, Sammy DeGraaff, Mohammed~Mehdi Hamdani
Sheet: 1
File: Vamora75.kicad_sch

Title: Vamora75 ~ 75% hot-swap keyboard, Windows ANSI

Size: A1	Date: 2026-10-03	Rev: 1.2
KiCad E.D.A. 10.0.6		Id: 1/1

15 16