

## USB-C · protection · 3.3 V supply

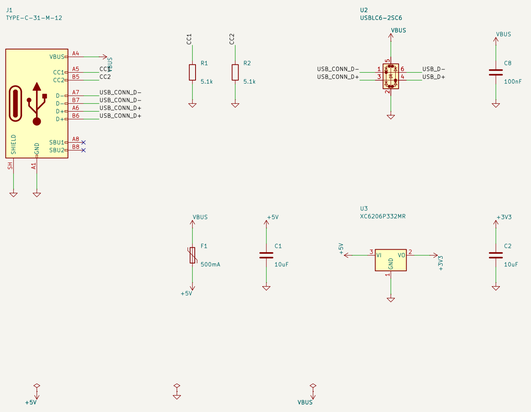



CC1/CC2: 5.1 kΩ sink pull-downs. F1: 0.5 A hold-current PTC.

## RP2040 · QSPI flash · crystal · boot/reset · decoupling

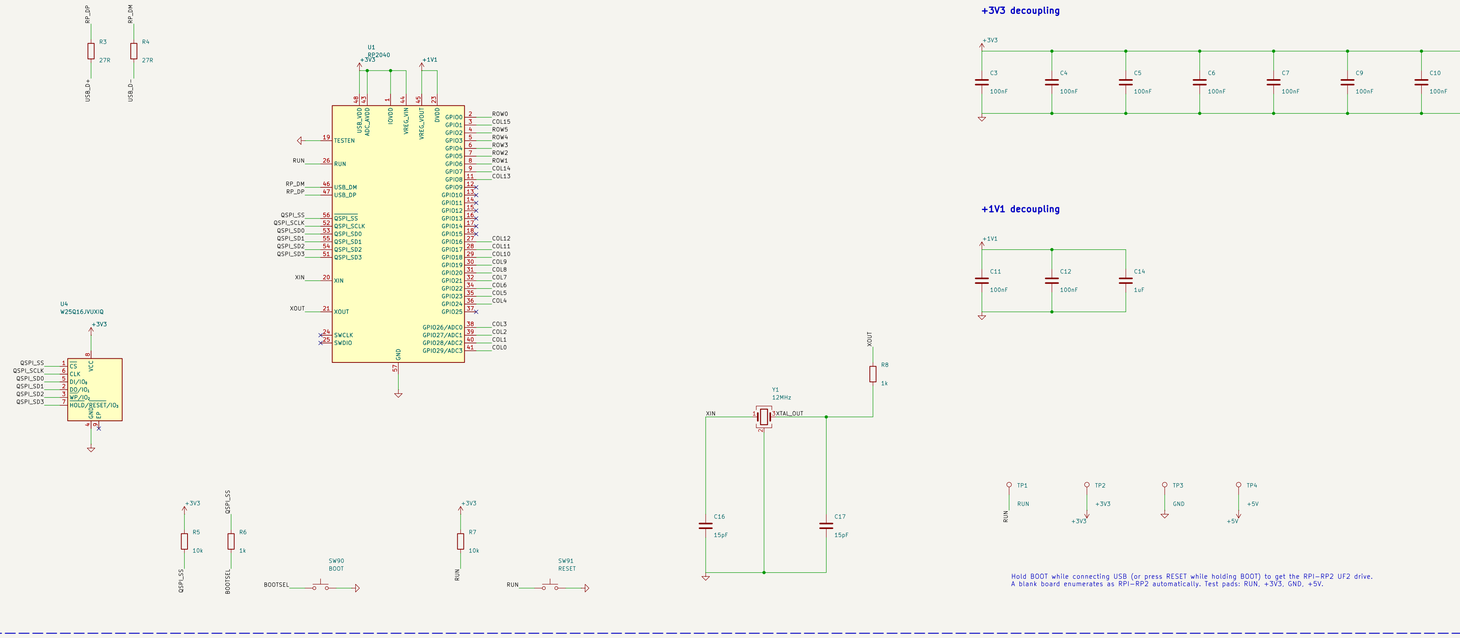


### +3V3 decoupling




### +1V1 decoupling








Hold BOOT while connecting USB (or press RESET while holding BOOT) to get the RPI-RP2 UF2 drive.
A blank board enumerates as RPI-RP2 automatically. Test pads: RUN, +3V3, GND, +5V.

## Key matrix · 82 × Kailh CPG151101S11 hot-swap sockets · 1N4148W · 6 rows × 16 columns · COL2ROW

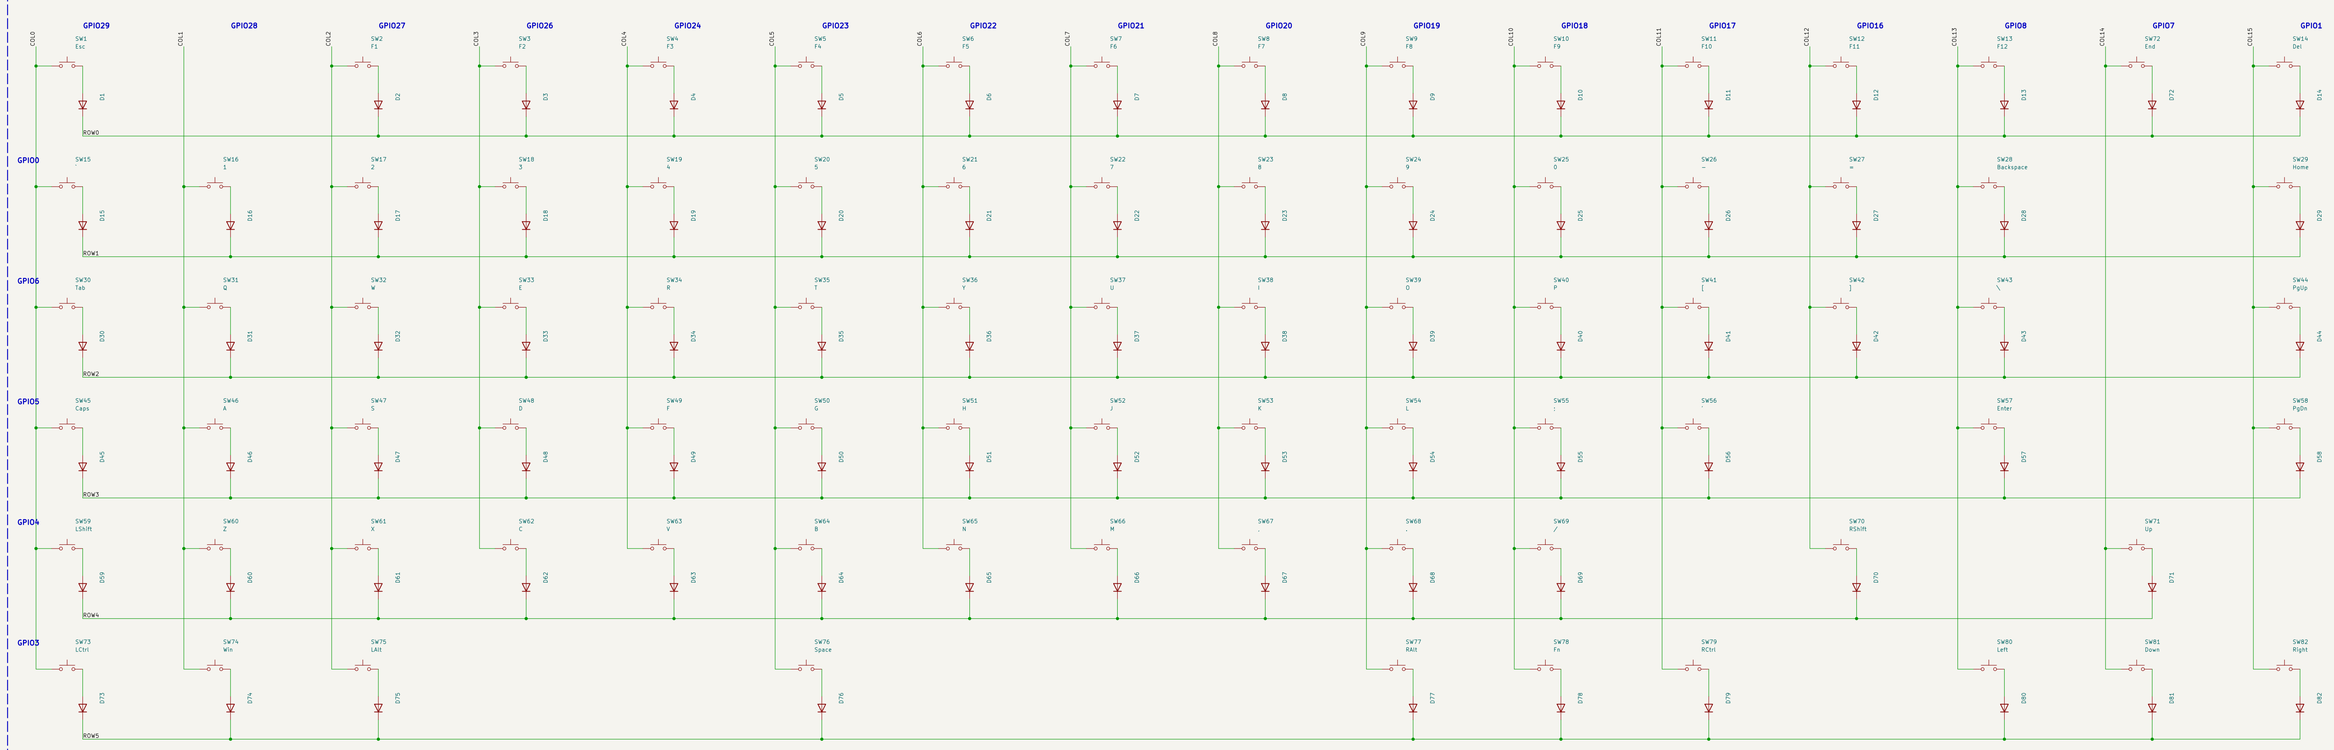


All SMD parts on the bottom side (single-sided JLCPCB assembly)
RP2040 + USB-C, 82 Kailh CPG151101S11 hot-swap sockets, 6x16 COL2ROW matrix
**Vamora — Kevin Le, Sammy DeGraaff, Mohammed-Mehdi Hamdaoui**

Sheet: /
File: Vamora75.kicad_sch

***Title: Vamora75 — 75% hot-swap keyboard, Windows ANSI***

| Size: A1 | Date: 2026-11-12 | **Rev: 1.7** |
|---|---|---|
| KiCad E.D.A. 10.0.6 | | Id: 1/1 |