

8

7

6

5

4

3

2



1

D

C

B

A

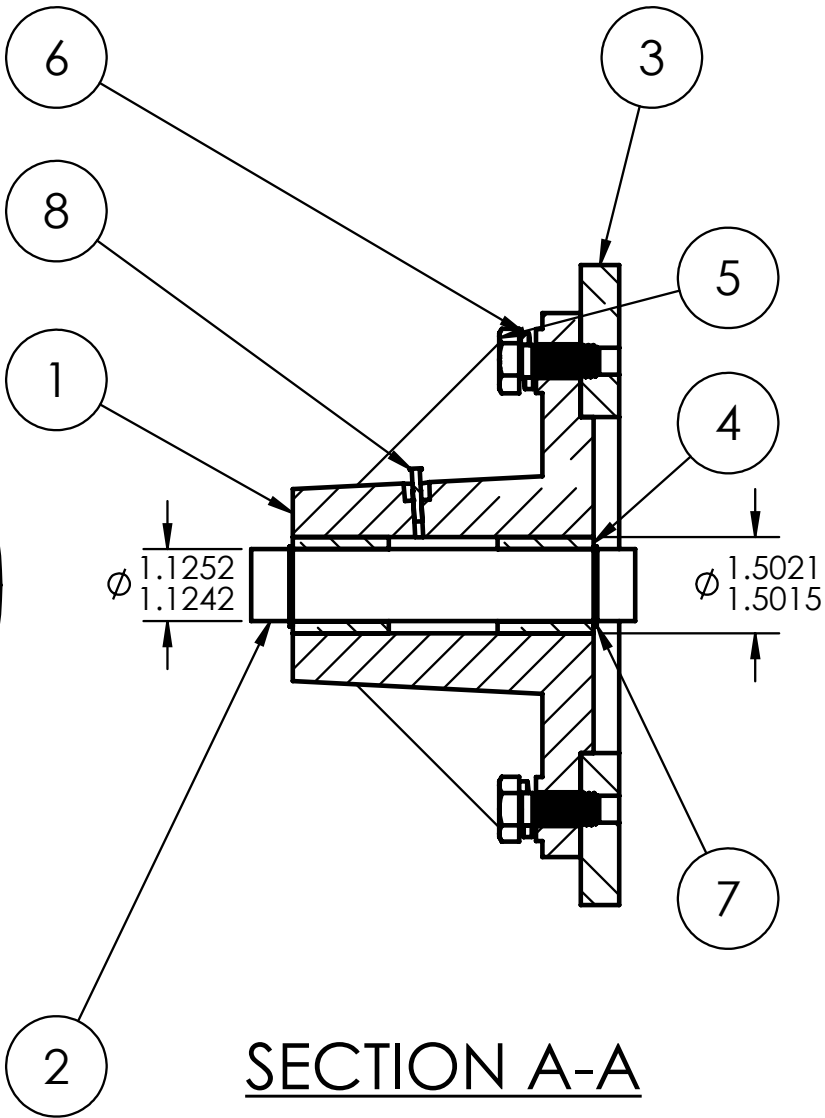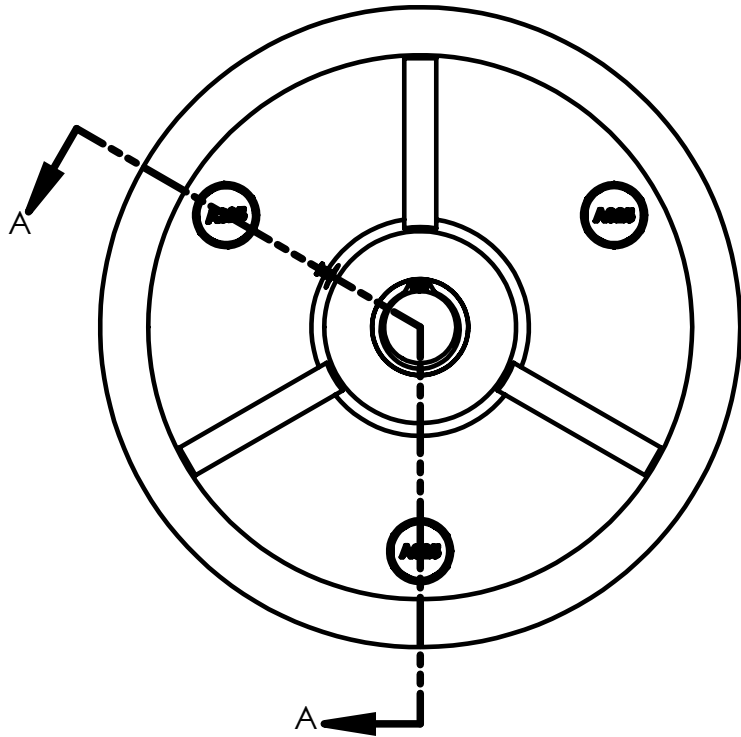

- NOTES: 1) LUBRICATE (4) AND (8) BEFORE INSTALLING.  
2) APPLY THREAD SEALANT (8) TO BEFORE INSTALLING.  
3) BEARING AND HOUSING FIT IS LN 3.  
4) SHAFT TO BEARING FIT IS RC 4.

THIRD-ANGLE PROJECTION

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DUNWOODY COLLEGE OF TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DUNWOODY COLLEGE OF TECHNOLOGY IS PROHIBITED.

NEXT ASSY

USED ON

APPLICATION

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL  $\pm 1/64$   
ANGULAR:  $\pm 0.5^\circ$   
TWO PLACE DECIMAL  $\pm 0.01$   
THREE PLACE DECIMAL  $\pm 0.005$

INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5-2009

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN

CHECKED

ENG APPR.

MFG APPR.

Q.A.

COMMENTS:

NAME

DATE

EK

1-21-2015

**Dunwoody** COLLEGE OF TECHNOLOGY  
818 Dunwoody Boulevard, Minneapolis, MN 55403

TITLE:

PLAIN BEARING ASSEMBLY

SIZE

DWG. NO.

REV

**B**

**2210-BRG-1**

**B**

SCALE: 1:4

WEIGHT:

SHEET 1 OF 1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/21/2015	EK
B	BEARING & SHAFT SIZE CHANGE	1/21/2015	EK

D

C

B

A