



MAX-M10S

Standard precision GNSS module

Professional grade

Data sheet



Abstract

This data sheet describes the MAX-M10S module, an ultra-low-power GNSS receiver for high-performance asset-tracking applications.

www.u-blox.com

UBX-20035208 - R06
C1-Public



Document information

| | | |
|-------------------------------|--------------------------------|-------------|
| Title | MAX-M10S | |
| Subtitle | Standard precision GNSS module | |
| Document type | Data sheet | |
| Document number | UBX-20035208 | |
| Revision and date | R06 | 08-Apr-2024 |
| Disclosure restriction | C1-Public | |

| Product status | Corresponding content status | |
|--------------------------------------|-------------------------------------|--|
| Functional sample | Draft | For functional testing. Revised and supplementary data will be published later. |
| In development / prototype | Objective specification | Target values. Revised and supplementary data will be published later. |
| Engineering sample | Advance information | Data based on early testing. Revised and supplementary data will be published later. |
| Initial production | Early production information | Data from product verification. Revised and supplementary data may be published later. |
| Mass production / End of life | Production information | Document contains the final product specification. |

This document applies to the following products:

| Product name | Type number | FW version | IN/PCN reference | Product status |
|---------------------|--------------------|-------------------|-------------------------|-----------------------|
| MAX-M10S | MAX-M10S-00B-01 | ROM SPG 5.10 | UBXDOC-963802114-12186 | Mass production |

u-blox or third parties may hold intellectual property rights in the products, names, logos and designs included in this document. Copying, reproduction, or modification of this document or any part thereof is only permitted with the express written permission of u-blox. Disclosure to third parties is permitted for clearly public documents only.

The information contained herein is provided "as is" and u-blox assumes no liability for its use. No warranty, either express or implied, is given, including but not limited to, with respect to the accuracy, correctness, reliability and fitness for a particular purpose of the information. This document may be revised by u-blox at any time without notice. For the most recent documents, visit www.u-blox.com.

Copyright © 2024, u-blox AG.

Contents

| | |
|---|-----------|
| 1 Functional description..... | 4 |
| 1.1 Overview..... | 4 |
| 1.2 Performance..... | 4 |
| 1.3 Supported GNSS constellations..... | 5 |
| 1.4 Supported protocols..... | 6 |
| 1.5 Firmware features..... | 6 |
| 2 System description..... | 8 |
| 2.1 Block diagram..... | 8 |
| 3 Pin definition..... | 9 |
| 3.1 Pin assignment..... | 9 |
| 3.2 Pin state..... | 10 |
| 4 Electrical specifications..... | 11 |
| 4.1 Absolute maximum ratings..... | 11 |
| 4.2 Operating conditions..... | 11 |
| 4.3 Indicative power requirements..... | 12 |
| 5 Communication interfaces..... | 14 |
| 5.1 UART..... | 14 |
| 5.2 I2C..... | 14 |
| 5.3 Default interface settings..... | 15 |
| 6 Mechanical specifications..... | 16 |
| 7 Qualifications and approvals..... | 18 |
| 8 Product handling..... | 19 |
| 8.1 Soldering..... | 19 |
| 9 Labeling and ordering information..... | 20 |
| 9.1 Product labeling..... | 20 |
| 9.2 Explanation of product codes..... | 20 |
| 9.3 Ordering codes..... | 20 |
| Related documents..... | 22 |
| Revision history..... | 23 |

1 Functional description

1.1 Overview

MAX-M10S module features the u-blox M10 standard precision GNSS platform and provides exceptional sensitivity and acquisition time for all L1 GNSS signals.

The M10 platform supports concurrent reception of four GNSS (GPS, GLONASS, Galileo, and BeiDou). The high number of visible satellites enables the receiver to select the best signals. This maximizes the position availability, in particular under challenging conditions such as in deep urban canyons.

u-blox Super-S (Super-Signal) technology offers great RF sensitivity and can improve the dynamic position accuracy with small antennas or in non-line-of-sight scenarios.

The extremely low power consumption of 25 mW in continuous tracking mode allows great power autonomy for all battery-operated devices, such as asset trackers, without compromising on GNSS performance.

For maximum sensitivity in passive antenna designs, MAX-M10S integrates an LNA followed by a SAW filter in the RF path.

MAX-M10S offers backwards pin-to-pin compatibility with products from the previous u-blox generations, which saves the designer's effort and reduces costs when upgrading designs to the advanced low-power u-blox M10 GNSS technology.

1.2 Performance

| Parameter | Specification | Value |
|---------------------------------------|---------------|---|
| Receiver type | | u-blox M10 receiver |
| Accuracy of time pulse signal | RMS | 30 ns |
| | 99% | 60 ns |
| Frequency of time pulse signal | | Default 1PPS (0.25 Hz to 10 MHz configurable) |
| Operational limits ¹ | Dynamics | ≤ 4 g |
| | Altitude | 80,000 m |
| | Velocity | 500 m/s |
| Velocity accuracy ² | | 0.05 m/s |
| Dynamic heading accuracy ² | | 0.3 deg |

Table 1: MAX-M10S specifications

| Parameter | | GPS+GAL | GPS+GAL +GLO | GPS+GAL +BDS B1I (default) | GPS+GAL +BDS B1C | GPS+GAL +BDS B1C +GLO |
|--|-------------------------------|---------|-----------------|----------------------------------|---------------------|-----------------------------|
| Max navigation update rate ³ | Default | 10 Hz | 6 Hz | 3 Hz | 8 Hz | 4 Hz |
| | High performance ⁴ | 20 Hz | 16 Hz | 12 Hz | 16 Hz | 10 Hz |

¹ Assuming Airborne 4 g platform.

² 50% at 30 m/s for dynamic operation.

³ Minimum 98% fix rate under typical conditions.

⁴ Configuration required.

| Parameter | | GPS+GAL | GPS+GAL +GLO | GPS+GAL +BDS B1I (default) | GPS+GAL +BDS B1C | GPS+GAL +BDS B1C +GLO |
|--|------------------------------------|----------|-----------------|----------------------------------|---------------------|-----------------------------|
| Position accuracy (CEP) ^{5, 6} | | 1.5 m | 1.5 m | 1.5 m | 1.5 m | 1.5 m |
| Time To First Fix (TTFF) ^{5, 7, 8} | Cold start | 28 s | 23 s | 27 s | 28 s | 23 s |
| | Hot start | 1 s | 1 s | 1 s | 1 s | 1 s |
| | AssistNow Online ⁹ | 1 s | 1 s | 1 s | 1 s | 1 s |
| | AssistNow Offline ¹⁰ | 2 s | 2 s | 3 s | 2 s | 2 s |
| | AssistNow Autonomous ¹¹ | 3 s | 4 s | 4 s | 4 s | 4 s |
| Sensitivity ¹² | Tracking and navigation | -167 dBm | -167 dBm | -167 dBm | -167 dBm | -167 dBm |
| | Reacquisition | -160 dBm | -160 dBm | -160 dBm | -160 dBm | -160 dBm |
| | Cold Start | -148 dBm | -148 dBm | -148 dBm | -148 dBm | -148 dBm |
| | Hot start ⁷ | -159 dBm | -159 dBm | -159 dBm | -159 dBm | -159 dBm |

Table 2: MAX-M10S typical performance in multi-constellation GNSS modes.

| Parameter | | GPS | GLONASS | BDS B1I | GALILEO | BDS B1C |
|--|-------------------------------|----------|----------|----------|----------|----------|
| Max navigation update rate ³ | Default | 18 Hz | 18 Hz | 18 Hz | 18 Hz | 18 Hz |
| | High performance ⁴ | 25 Hz | 25 Hz | 25 Hz | 25 Hz | 25 Hz |
| Position accuracy (CEP) ^{5, 6} | | 1.5 m | 4 m | 2 m | 3 m | 2 m |
| Time To First Fix (TTFF) ^{5, 7, 8} | Cold start | 29 s | 27 s | 30 s | 41 s | 56 s |
| | Hot start | 1 s | 1 s | 1 s | 1 s | 1 s |
| | AssistNow Online ⁹ | 1 s | 1 s | 1 s | 5 s | N/A |
| Sensitivity ¹² | Tracking and navigation | -167 dBm | -166 dBm | -160 dBm | -161 dBm | -163 dBm |
| | Reacquisition | -160 dBm | -158 dBm | -158 dBm | -154 dBm | -156 dBm |
| | Cold Start | -148 dBm | -147 dBm | -146 dBm | -141 dBm | -136 dBm |
| | Hot start ⁷ | -159 dBm | -159 dBm | -159 dBm | -155 dBm | -157 dBm |

Table 3: MAX-M10S typical performance in single-GNSS modes

1.3 Supported GNSS constellations

MAX-M10S is a concurrent GNSS receiver that can receive and track multiple GNSS systems. The single RF front-end architecture enables concurrent reception of multiple GNSS constellations. The receiver can be configured for a subset of GNSS constellations to achieve lower power consumption.

The default configuration on MAX-M10S is concurrent reception of GPS, Galileo, and BeiDou B1I with QZSS and SBAS enabled.

The following GNSS and their signals are supported:

⁵ GPS is always in combination with SBAS and QZSS.

⁶ CEP, 50%, 24 hours static, -130 dBm, > 6 SVs for each GNSS system.

⁷ Commanded starts.

⁸ All satellites at -130 dBm. Measured at room temperature.

⁹ Dependent on the speed and latency of the aiding data connection, commanded starts.

¹⁰ Using seven days old AssistNow Offline data. External memory may be required.

¹¹ Using two days old orbital predicted data. External memory may be required.

¹² Demonstrated with a good external LNA. Measured at room temperature.

| System | Signals |
|----------------------|---|
| GPS / QZSS | L1C/A (1575.42 MHz) |
| Galileo | E1-B/C (1575.42 MHz) |
| GLONASS | L1OF (1602 MHz + $k \cdot 562.5$ kHz, $k = -7, \dots, 5, 6$) |
| BeiDou ¹³ | B1I (1561.098 MHz), B1C (1575.42 MHz) |

Table 4: Supported GNSS and signals on MAX-M10S

The following GNSS assistance services are supported:

| Service | Support |
|-----------------------|---|
| AssistNow™ Online | GPS L1C/A, Galileo E1, QZSS L1C/A, GLONASS L1OF, BeiDou B1I |
| AssistNow™ Offline | GPS L1C/A, Galileo E1, GLONASS L1OF |
| AssistNow™ Autonomous | GPS L1C/A, Galileo E1, GLONASS L1OF, QZSS L1C/A, BeiDou B1I |

Table 5: Supported Assisted GNSS (A-GNSS) services

The following augmentation systems are supported:

| System | Support |
|--------|-------------------------------------|
| SBAS | EGNOS, GAGAN, MSAS, WAAS and BDSBAS |
| QZSS | L1S (SLAS) |

Table 6: Supported augmentation systems

The augmentation systems SBAS and QZSS can be enabled only if GPS operation is also enabled.

1.4 Supported protocols

MAX-M10S supports the following interface protocols:

| Protocol | Type |
|--|--|
| UBX | Input/output, binary, u-blox proprietary |
| NMEA versions 2.1, 2.3, 4.0, 4.10 and 4.11 (default) | Input/output, ASCII |

Table 7: Supported protocols

1.5 Firmware features

| Feature | Description |
|----------------------------------|--|
| Antenna supervisor ¹⁴ | Antenna supervisor for active antenna control and short detection |
| CloudLocate GNSS | Extends the life of energy-constrained IoT applications. Small payload messages supported. |
| Assisted GNSS | AssistNow Online, AssistNow Offline and AssistNow Autonomous |
| Backup modes | Hardware backup mode and software standby mode |
| Power save modes ¹⁵ | On/off, cyclic tracking |
| Super-S | Improved dynamic position accuracy with small antennas |

¹³ BeiDou B1I cannot be enabled simultaneously with BeiDou B1C or GLONASS L1OF.

¹⁴ External components required, some pins need to be reconfigured.

¹⁵ The power save modes are not available if BeiDou B1C is enabled.

| Feature | Description |
|------------------------------|---|
| Protection level | Real-time position accuracy estimate with 95% confidence level ¹⁶ |
| Galileo return link messages | Galileo search and rescue (SAR) return link messages (RLM) via Galileo satellite signal |
| Data batching | Autonomous tracking up to 10 minutes at 1 Hz |
| Odometer | Measure traveled distance with support for different user profiles |

Table 8: Firmware features

| Feature | Description |
|------------------------|---|
| Anti-jamming | RF interference and jamming detection and reporting |
| Anti-spoofing | Spoofing detection and reporting |
| Configuration lockdown | Receiver configuration can be locked by command |
| Message integrity | All messages can be cryptographically signed |
| Secure boot | Only signed firmware images are executed |

Table 9: Security features

¹⁶ Verified for automotive environment only.

2 System description

2.1 Block diagram

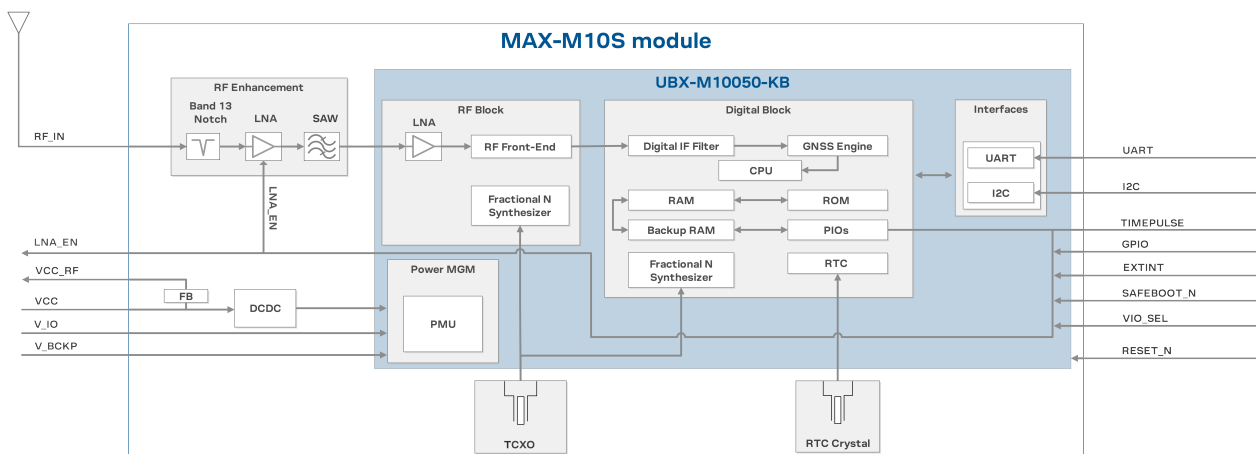


Figure 1: MAX-M10S block diagram

3 Pin definition

3.1 Pin assignment

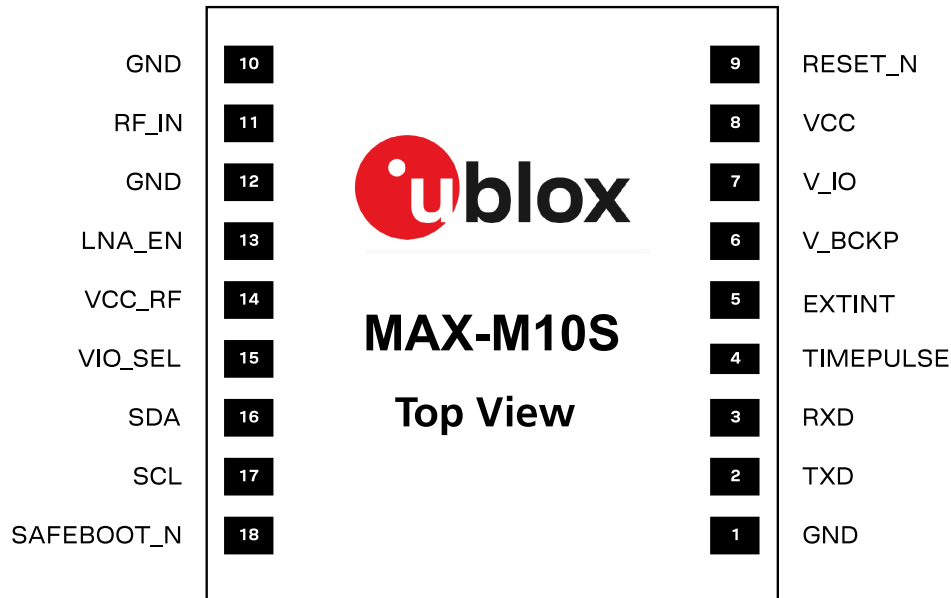


Figure 2: MAX-M10S pin assignment

| Pin no. | Name | PIO no. | I/O | Description |
|---------|------------|---------|-----|--|
| 1 | GND | - | - | Connect to GND |
| 2 | TXD | 1 | O | UART TX. Leave open if not used. |
| 3 | RXD | 0 | I | UART RX. Leave open if not used. |
| 4 | TIMEPULSE | 4 | O | Time pulse signal (shared with SAFEBOOT_N pin) ¹⁷ |
| 5 | EXTINT | 5 | I | External interrupt. Leave open if not used. |
| 6 | V_BCKP | - | I | Backup voltage supply |
| 7 | V_IO | - | I | IO voltage supply |
| 8 | VCC | - | I | Main voltage supply |
| 9 | RESET_N | - | I | System reset (active low). Has to be low for at least 1 ms to trigger a reset. |
| 10 | GND | - | - | Connect to GND |
| 11 | RF_IN | - | I | GNSS signal input |
| 12 | GND | - | - | Connect to GND |
| 13 | LNA_EN | - | O | On/Off external LNA or active antenna |
| 14 | VCC_RF | - | O | Output voltage RF section |
| 15 | VIO_SEL | - | I | Voltage selector for V_IO supply. Connect to GND for 1.8 V supply, or leave open for 3.3 V supply. |
| 16 | SDA | 2 | I/O | I2C data. Leave open if not used. |
| 17 | SCL | 3 | I | I2C clock. Leave open if not used. |
| 18 | SAFEBOOT_N | - | I | Safeboot mode (active low). Leave open if not used. ¹⁷ |

Table 10: MAX-M10S pin assignment

¹⁷ The receiver enters safeboot mode if this pin is low at start up. The SAFEBOOT_N pin is internally connected to TIMEPULSE pin through a 1 kΩ series resistor.

3.2 Pin state

Table 11 defines the state of the PIOs and RESET_N pins in different modes. The functions of the PIOs are as defined in the default configuration.

| PIO no. | Pin no. | Default function | Continuous mode | Software standby mode | Safe boot mode |
|-----------------|---------|------------------|-----------------|-----------------------|----------------|
| 0 | 3 | RXD | Input pull-up | Input pull-up | Input pull-up |
| 1 | 2 | TXD | Output | Input pull-up | Output |
| 2 | 16 | SDA | Input pull-up | Input pull-up | Input pull-up |
| 3 | 17 | SCL | Input pull-up | Input pull-up | Input pull-up |
| 4 ¹⁷ | 18 | SAFEBOOT_N | Output | Input pull-up | Output (low) |
| | 4 | TIMEPULSE | Output | Input pull-up | Output (low) |
| 5 | 5 | EXTINT | Input pull-up | Input pull-up | Input pull-up |
| 7 | 13 | LNA_EN | Output (high) | Input pull-down | Input pull-up |
| - | 9 | RESET_N | Input pull-up | Input pull-up | Input pull-up |

Table 11: Pins state





In reset mode (RESET_N = low), all PIOs are configured as input pull-up.



In hardware backup mode (VCC = 0 V and V_IO = 0 V), PIOs must not be driven.

4 Electrical specifications

4.1 Absolute maximum ratings


-  CAUTION. Risk of device damage. Exceeding the absolute maximum ratings may affect the lifetime and reliability of the device or permanently damage it. Do not exceed the absolute maximum ratings.
-  This product is not protected against overvoltage or reversed voltages. Use appropriate protection to avoid device damage from voltage spikes exceeding the specified boundaries.


| Symbol | Parameter | Min | Max | Unit |
|-------------------|--|------|-------------------------------------|------|
| VCC | Main supply voltage | -0.3 | 3.6 | V |
| V _{IO} | IO supply voltage, VIO_SEL = GND. | -0.3 | VCC + 0.3 (max 1.98) | V |
| | IO supply voltage, VIO_SEL = open. | -0.3 | VCC + 0.3 (max 3.6) | V |
| | Voltage ramp on V _{IO} ¹⁸ | 25 | 35000 | µs/V |
| V _{BCKP} | Backup supply voltage | -0.3 | 3.6 | V |
| V _{PIO} | Input voltage on RESET_N and digital pins VIO_SEL = GND | -0.3 | V _{IO} + 0.3 (max 1.98) | V |
| | Input voltage on RESET_N and digital pins VIO_SEL = open. | -0.3 | V _{IO} + 0.3 (max 3.6) | V |
| I _{PIO} | Max source / sink current, digital pins ¹⁹ | -10 | 10 | mA |
| ICC _{RF} | Max source current, VCC _{RF} | | 250 | mA |
| P _{rfin} | RF input power at RF_IN ²⁰ | | 0 | dBm |
| T _{amb} | Ambient temperature | -40 | +85 | °C |
| T _s | Storage temperature | -40 | +85 | °C |

Table 12: Absolute maximum ratings

4.2 Operating conditions

Table 13 shows the general operating conditions. Table 14 shows the electrical parameters for digital I/O.

 The V_{IO} voltage range is selected with the VIO_SEL pin.

-  For designs with 1.8 V supply at V_{IO} and V_{BCKP} supplied, switch off V_{IO} supply 100 ms before VCC when transitioning to hardware backup mode. Alternatively, put the receiver to software standby mode by sending UBX-RXM-PMREQ message before switching off V_{IO} and VCC. For designs with 3 V supplies, both supplies can be switched off simultaneously or ensure that V_{IO} is switched off before VCC.

| Symbol | Parameter | Min | Typical | Max | Unit |
|-----------------|----------------------------------|------|----------|----------------|------|
| VCC | Main supply voltage | 1.76 | 1.8, 3.3 | 3.6 | V |
| V _{IO} | IO supply voltage, VIO_SEL = GND | 1.76 | 1.8 | VCC (max 1.98) | V |

¹⁸ Exceeding the voltage ramp speed may permanently damage the device.

¹⁹ The SAFEBOOT_N pin has an internal 1 kΩ series resistor.

²⁰ Test conditions: source impedance = 50 Ω, continuous wave.

| Symbol | Parameter | Min | Typical | Max | Unit |
|-------------------------------|---|------|-----------|---------------|------|
| | IO supply voltage, VIO_SEL = open | 2.7 | 3.3 | VCC (max 3.6) | V |
| V_BCKP | Supply voltage, backup domain | 1.65 | | 3.6 | V |
| V_IOSWITCH | V_IO voltage threshold to switch an internal supply for the backup domain from V_IO to V_BCKP | | 1.45 | | V |
| VCC_RF | VCC_RF output voltage | | VCC - 0.1 | | V |
| ICC_RF | VCC_RF output current | | | 50 | mA |
| Z _{in} ²¹ | Input impedance at RF_IN | | 50 | | Ω |
| NF _{tot} | Receiver chain noise figure | | 1.5 | | dB |
| Ext_gain ²² | External gain at RF_IN, low gain mode (default) | | | 30 | dB |
| | External gain at RF_IN, bypass mode | 10 | 25 | 40 | dB |
| T _{opr} | Operating temperature | -40 | | +85 | °C |

Table 13: General operating conditions

| Symbol | Parameter | Min | Typical | Max | Unit |
|-----------------------------|--|-------------|---------|------|------|
| I _{leak} | Leakage current input pins ²³ | | 25 | | nA |
| V _{in} | Input pin voltage range | 0 | | V_IO | V |
| V _{il} | Low-level input voltage | | | 0.63 | V |
| V _{ih} | High-level input voltage | 0.68 x V_IO | | | V |
| V _{ol} | Low-level output voltage, I _{out} = -2 mA ²⁴ | | | 0.4 | V |
| V _{oh} | High-level output voltage, I _{out} = 2 mA ²⁴ | V_IO - 0.4 | | | V |
| R _{pu, IO} | Pull-up resistance, Digital IO ²⁵ . VIO_SEL = GND | 6 | 17 | 72 | kΩ |
| R _{pu, IO} | Pull-up resistance, Digital IO ²⁵ . VIO_SEL = open | 8 | 18 | 40 | kΩ |
| R _{pd, IO} | Pull-down resistance, Digital IO | 21 | 80 | 180 | kΩ |
| R _{pu, SAFEBOOT_N} | Pull-up resistance, SAFEBOOT_N ²⁶ | 6 | 17 | 72 | kΩ |
| R _{pu, RESET_N} | Pull-up resistance, RESET_N | 7 | 10 | 13 | kΩ |

Table 14: Digital IO

4.3 Indicative power requirements

This section provides examples of typical current requirements. They are characterized on samples using a cold start command. The actual power requirements may vary depending on the firmware version used, the external circuitry, the number of satellites tracked, the signal strength, the type and time of start, duration, internal LNA gain mode, and the test conditions.

All values in [Table 15](#), [Table 16](#), and [Table 17](#) have been measured at 25 °C ambient temperature with the default configuration unless otherwise stated. SBAS and QZSS are active in all measurements.

[Table 15](#) shows indicative current consumption for VCC and V_IO with a 3.0 V supply.

²¹ The RF_IN input integrates a built-in DC block.

²² The internal LNA gain is configurable.

²³ V_{in} = V_IO, at room temperature.

²⁴ TIMEPULSE (PIO4) has 4 mA current drive/sink capability.

²⁵ TXD, RXD, TIMEPULSE, EXTINT, SCL, SDA, and LNA_EN.

²⁶ The SAFEBOOT_N pin has an additional 1 kΩ series resistor.

| Symbol (Parameter) | Conditions | GPS | GPS+GAL | GPS+GAL +GLO | GPS+GAL +BDS B1I (default) | GPS+GAL +BDS B1C | GPS+GAL +BDS B1C +GLO | Unit |
|---|---|-----|---------|-----------------|----------------------------------|---------------------|-----------------------------|------|
| I_{VCC} ^{27, 28} (Current at VCC) | Acquisition ²⁹ | 8 | 10 | 12 | 11.5 | 11 | 13 | mA |
| | Tracking (Continuous mode) | 7.5 | 8 | 9 | 9.5 | 8.5 | 10 | mA |
| | Tracking (Power save mode) ³⁰ | 4.5 | 5 | 5 | 5 | - | - | mA |
| $I_{V_{IO}}$ ²⁷ (Current at V _{IO}) | Acquisition and Tracking (Continuous mode) | 2.1 | 2.2 | 2.3 | 2.3 | 2.2 | 2.3 | mA |
| | Tracking | 2 | 2 | 2 | 2 | - | - | mA |
| | Tracking (Power save mode) ³⁰ | 2 | 2 | 2 | 2 | - | - | mA |

Table 15: Typical currents for 3.0 V supply at VCC and V_{IO}

Table 16 shows indicative current consumption for VCC and V_{IO} with a 1.8 V supply.

| Symbol (Parameter) | Conditions | GPS | GPS+GAL | GPS+GAL +GLO | GPS+GAL +BDS B1I (default) | GPS+GAL +BDS B1C | GPS+GAL +BDS B1C +GLO | Unit |
|---|---|------|---------|-----------------|----------------------------------|---------------------|-----------------------------|------|
| I_{VCC} ^{27, 28} (Current at VCC) | Acquisition ²⁹ | 10.5 | 15.5 | 17.5 | 16.5 | 16 | 18.5 | mA |
| | Tracking (Continuous mode) | 9.5 | 11 | 12.5 | 13 | 11.5 | 14 | mA |
| | Tracking (Power save mode) ³⁰ | 5.5 | 6.0 | 6.5 | 6.5 | - | - | mA |
| $I_{V_{IO}}$ ²⁷ (Current at V _{IO}) | Acquisition and Tracking (Continuous mode) | 2.1 | 2.1 | 2.2 | 2.2 | 2.1 | 2.2 | mA |
| | Tracking | 2 | 2 | 2 | 2 | - | - | mA |
| | Tracking (Power save mode) ³⁰ | 2 | 2 | 2 | 2 | - | - | mA |

Table 16: Typical currents for 1.8 V supply at VCC and V_{IO}


The inrush current can go up to 100 mA at startup. Ensure that the external power supply is able to deliver up to 100 mA.

Table 17 shows current consumption for the backup modes.

| Symbol | Parameter | Conditions | Typ. | Unit |
|------------------------------|--|--|------|------|
| $I_{V_{BCKP}}$ ³¹ | Total current in hardware backup mode | V _{BCKP} = 3.3 V, V _{IO} = VCC = 0 V | 28 | μA |
| $I_{V_{IO}}$ | V _{IO} current in software standby mode | V _{IO} = 1.8 V | 37 | μA |
| | | V _{IO} = 3.3 V | 46 | μA |
| I_{VCC} | VCC current in software standby mode | VCC = 3.3 V | 120 | nA |

Table 17: Backup currents


Extreme operating temperatures can significantly impact the specified values. If an application operates near the min or max temperature limits, ensure the specified values are not exceeded.

²⁷ 1 Hz navigation update rate.

²⁸ Internal LNA set to low gain. Simulated signal using power levels of -130 dBm.

²⁹ Average current from start-up until the first fix.

³⁰ Cyclic tracking operation. BeiDou B1C is not supported in this mode.

³¹ $I_{V_{BCKP}}$ current in normal operation (V_{BCKP} = 3.3 V, V_{IO} = VCC = 3.3V) is ~3 μA.

5 Communication interfaces

The receiver supports communication over the UART and I2C interfaces.

All the inputs have an internal pull-up resistor in normal operation and can be left open if not used. The voltage level at the PIO pins is related to the V_{IO} supply voltage.

5.1 UART

The UART interface supports configurable baud rates. Hardware flow control is not supported. UART specifications are described in [Table 18](#).

| Symbol | Parameter | Min | Max | Unit |
|-----------------|------------------------|-------|--------|-------|
| R _u | Baud rate | 9600 | 921600 | bit/s |
| Δ _{Tx} | Tx baud rate accuracy | -1% | +1% | - |
| Δ _{Rx} | Rx baud rate tolerance | -2.5% | +2.5% | - |

Table 18: UART specifications

5.2 I2C

An I2C interface is available for communication with an external host CPU in the I2C Fast-mode. Backwards compatibility with the Standard-mode I2C bus operation is not supported. The interface can be operated only in the peripheral mode with a maximum clock frequency of 320 kHz³².

The interface can make use of clock stretching by holding the SCL line LOW to pause a transaction. In this case, the bit transfer rate is reduced. The maximum clock stretching time is 20 ms.

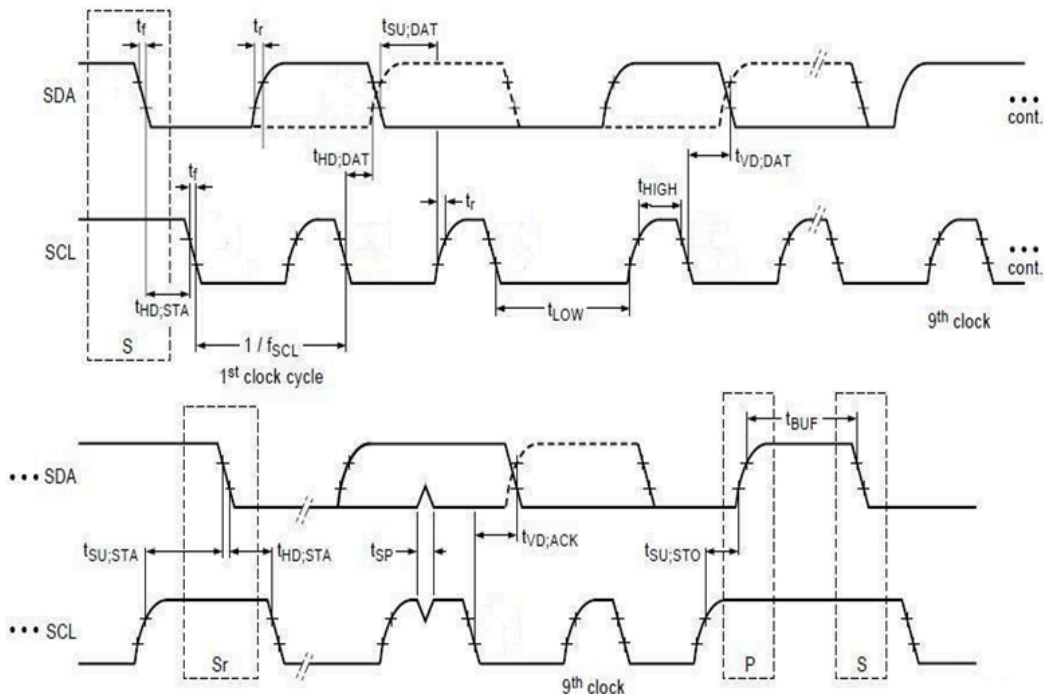


Figure 3: I2C peripheral specification

³² External pull-up resistors may be needed to achieve 320 kbit/s communication speed, as the internal pull-up resistance can be very large.

| Symbol | Parameter | I2C Fast-mode | | Unit |
|--------------|--|---------------------|---------------------|---------|
| | | Min | Max | |
| f_{SCL} | SCL clock frequency | 0 | 320 | kHz |
| $t_{HD;STA}$ | Hold time (repeated) START condition | 0.6 | - | μs |
| t_{LOW} | Low period of the SCL clock | 1.3 | - | μs |
| t_{HIGH} | High period of the SCL clock | 0.6 | - | μs |
| $t_{SU;STA}$ | Setup time for a repeated START condition | 0.6 | - | μs |
| $t_{HD;DAT}$ | Data hold time | 0 ³³ | - ³⁴ | μs |
| $t_{SU;DAT}$ | Data setup time | 100 | | ns |
| t_r | Rise time of both SDA and SCL signals | - | 300 (for C = 400pF) | ns |
| t_f | Fall time of both SDA and SCL signals | - | 300 (for C = 400pF) | ns |
| $t_{SU;STO}$ | Setup time for STOP condition | 0.6 | - | μs |
| t_{BUF} | Bus-free time between a STOP and START condition | 1.3 | - | μs |
| $t_{VD;DAT}$ | Data valid time | - | 0.9 ³⁴ | μs |
| $t_{VD;ACK}$ | Data valid acknowledge time | - | 0.9 ³⁴ | μs |
| V_{nL} | Noise margin at the low level | 0.1 V _{IO} | - | V |
| V_{nH} | Noise margin at the high level | 0.2 V _{IO} | - | V |

Table 19: MAX-M10S I2C peripheral timing and specifications

5.3 Default interface settings

| Interface | Settings |
|-----------|--|
| UART | <ul style="list-style-type: none"> 9600 baud, 8 bits, no parity bit, 1 stop bit. Input messages: NMEA and UBX. Output messages: NMEA GGA, GLL, GSA, GSV³⁵, RMC, VTG and TXT. |
| I2C | <ul style="list-style-type: none"> 7-bit I2C address (0x42). Input messages: NMEA and UBX. Output messages: NMEA GGA, GLL, GSA, GSV³⁵, RMC, VTG and TXT. |

Table 20: Default interface settings

³³ External device must provide a hold time of at least one transition time (max 300 ns) for the SDA signal (with respect to the min V_{ih} of the SCL signal) to bridge the undefined region of the falling edge of SCL.

³⁴ The maximum $t_{HD;DAT}$ must be less than the maximum $t_{VD;DAT}$ or $t_{VD;ACK}$ with a maximum of 0.9 μs by a transition time. This maximum must only be met if the device does not stretch the LOW period (t_{LOW}) of the SCL signal. If the clock stretches the SCL, the data must be valid by the set-up time before it releases the clock.

³⁵ In the default configuration, the NMEA-GSV messages are sent at 5-second intervals to avoid overflow in the TX buffer.

6 Mechanical specifications

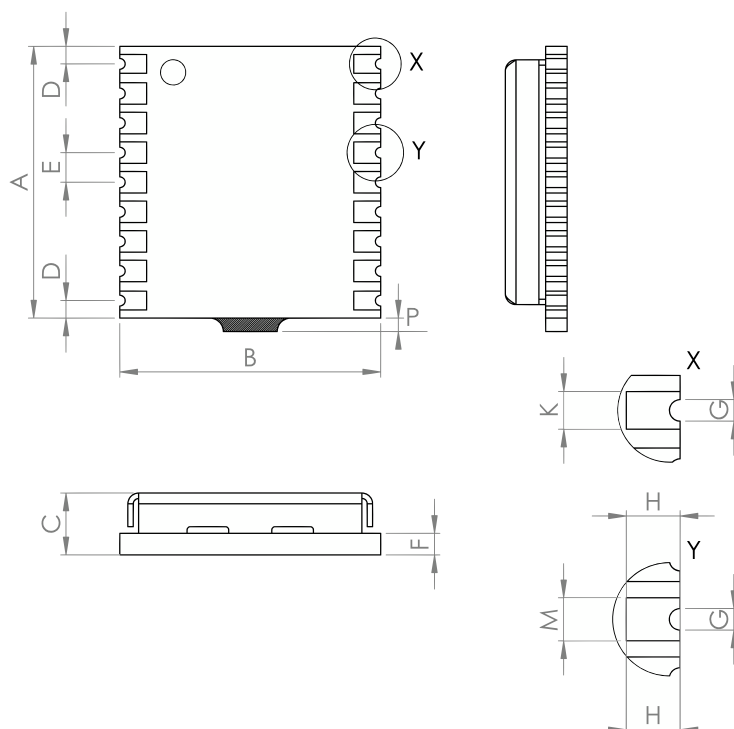


Figure 4: MAX-M10S mechanical drawing

| Symbol | Min (mm) | Typical (mm) | Max (mm) |
|--------|----------|--------------|----------|
| A | 10.0 | 10.1 | 10.7 |
| B | 9.6 | 9.7 | 9.8 |
| C | 2.2 | 2.5 | 2.7 |
| D | 0.55 | 0.65 | 0.95 |
| E | 1.0 | 1.1 | 1.2 |
| F | - | 0.76 | - |
| G | 0.3 | 0.4 | 0.5 |
| H | 0.9 | 1.0 | 1.1 |
| K | 0.6 | 0.7 | 0.8 |
| M | 0.7 | 0.8 | 0.9 |
| P | 0.0 | 0.3 | 0.6 |
| Weight | | 0.5 g | |

Table 21: MAX-M10S mechanical dimensions



The mechanical picture of the de-paneling residual tab (P) is an approximate representation, shape and position may vary.



Take the size of the de-paneling residual tabs into account when designing the component keepout area.



The pad width (K) applies to all four corner pads.

7 Qualifications and approvals

| | |
|--|--|
| Quality and reliability | |
| Product qualification | Qualified according to u-blox qualification policy, based on a subset of AEC-Q104 |
| Manufacturing | Manufactured at ISO/TS 16949 certified sites |
| Environmental | |
| RoHS compliance | Yes |
| Moisture sensitivity level (MSL) ^{36, 37} | 4 |
| Type approvals | |
| European RED certification (CE) | Declaration of Conformity (DoC) is available on the u-blox website . |
| UK conformity assessment (UKCA) | Yes |

Table 22: Qualifications and approvals

³⁶ For MSL standard see IPC/JEDEC J-STD-020 and J-STD-033 [5].

³⁷ For more information regarding moisture sensitivity levels, labeling, storage, and drying, see the Product packaging reference guide [4].

8 Product handling

8.1 Soldering

Reflow soldering procedures are described in the IPC/JEDEC J-STD-020 standard [\[5\]](#).

9 Labeling and ordering information

This section provides information about product labeling and ordering.

9.1 Product labeling

The labeling of MAX-M10S package provides product information and revision information. For more information, contact u-blox sales.

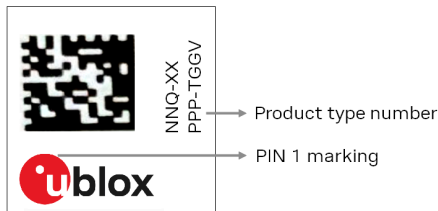


Figure 5: MAX-M10S label

The parts of the product code are explained in [Table 23](#)

| Code | Meaning | Example |
|------|----------------|--|
| PPP | Product family | MAX |
| TGG | Platform | M10 = u-blox M10 |
| V | Variant | S = Standard precision, ROM, TCXO, LNA, and SAW filter |
| NN | Option | 00, 01, 02, ... |
| Q | Quality grade | A = Automotive, B = Professional |
| XX | Product detail | Describes hardware and firmware versions |

Table 23: Part identification code

9.2 Explanation of product codes

Three product code formats are used in the product label. The product name is used in documentation such as this data sheet and identifies all u-blox products, independent of packaging and quality grade. The ordering code includes options and quality, while the type number includes the hardware and firmware versions.

[Table 24](#) describes the three different product code formats used in the MAX-M10S module.

| Format | Structure | Product code |
|---------------|-----------------|-----------------|
| Product name | PPP-TGGV | MAX-M10S |
| Ordering code | PPP-TGGV-NNQ | MAX-M10S-00B |
| Type number | PPP-TGGV-NNQ-XX | MAX-M10S-00B-01 |

Table 24: Product code formats

9.3 Ordering codes

| Ordering code | Product | Remark |
|---------------|---|--------|
| MAX-M10S-00B | u-blox M10 GNSS receiver module, professional grade | |

Table 25: Product ordering codes



Product changes affecting form, fit or function are documented by u-blox. For a list of Product Change Notifications (PCNs) see our website at: <https://www.u-blox.com/en/product-resources>.

Related documents

- [1] MAX-M10S Integration manual, [UBX-20053088](#)
- [2] u-blox M10 SPG 5.10 Interface description, [UBX-21035062](#)
- [3] u-blox M10 SPG 5.10 Release notes, [UBX-22001426](#)
- [4] Product packaging reference guide, [UBX-14001652](#)
- [5] Joint IPC/JEDEC standard, www.jedec.org



For regular updates to u-blox documentation and to receive product change notifications please register on our homepage <https://www.u-blox.com>.

Revision history

| Revision | Date | Status / comments |
|----------|-------------|--|
| R01 | 21-Dec-2020 | Objective specification |
| R02 | 20-Apr-2021 | Advance information. Updated Firmware features, Pin assignment, Absolute maximum ratings, Operating conditions, Indicative power requirements, and Product labeling. Minor revision. |
| R03 | 28-Jun-2022 | New product type number for MAX-M10S-00B-01 with ROM SPG 5.10 firmware. Updated Document information, Pin definition, Performance figures and Indicative power requirements with new GNSS configurations. Updated Electrical specifications, Operating conditions, and Absolute maximum ratings. Added configuration lock and power save modes features, maximum I2C clock stretching time, MSL specification and Reliability tests and approvals. |
| R04 | 16-May-2023 | Updated maximum navigation update rate in section Performance, ICC_RF in section Absolute maximum ratings, VCC and V_IO supply timing requirements in Operating conditions, and section Mechanical specifications. Added 1 Hz navigation update rate footnote in section Indicative power requirements. |
| R05 | 28-Mar-2024 | Mass production Updated sections <ul style="list-style-type: none"> Supported GNSS constellations: Supported Assisted GNSS (A-GNSS) services Pin assignment Pin state Absolute maximum ratings: V_IO for VIO_SEL = GND Communication interfaces Mechanical specifications: module weight Qualifications and approvals Change in document structure <ul style="list-style-type: none"> Moisture sensitivity level (MSL) included in chapter Qualifications and approvals |
| R06 | 08-Apr-2024 | Added section <ul style="list-style-type: none"> Product handling: Soldering Updated sections <ul style="list-style-type: none"> Qualifications and approvals |

Contact

u-blox AG

Address: Zürcherstrasse 68
 8800 Thalwil
 Switzerland

For further support and contact information, visit us at www.u-blox.com/support.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[u-blox:](#)

[MAX-M10S-00B](#)