

CN Type Solder Male SCSI Connector + Snap-Fit Type Plastic Cover

SCSI 焊线公头装配式卡扣CN型 (14, 36, 50)

Insulator	PBT UL 94-V0
Plastic Cover	ABS
Shell	Spec
Pin Contact	Phosphor bronze
Current Rating	1Amp AC/DC
Insulator Resistance	200MΩ MIN. (at 500V DC)
Contact Resistance	35mΩ Max
Temperature	-25° C to +85° C










FUYSC116-46(50p)



FUYSC116-46(36p)



FUYSC116-46(14p)

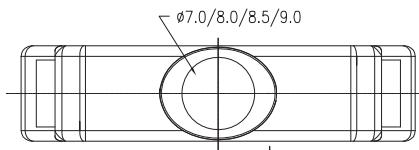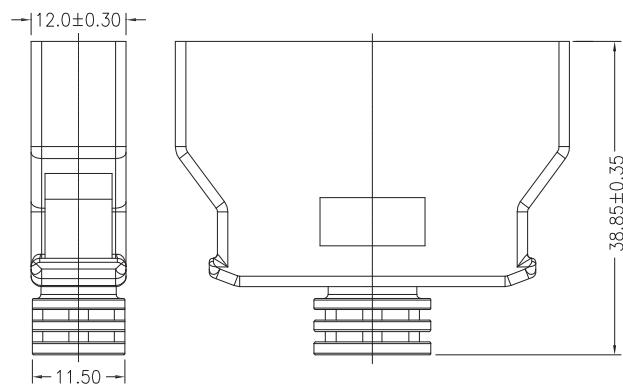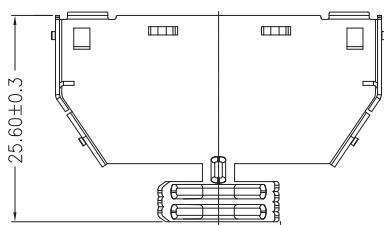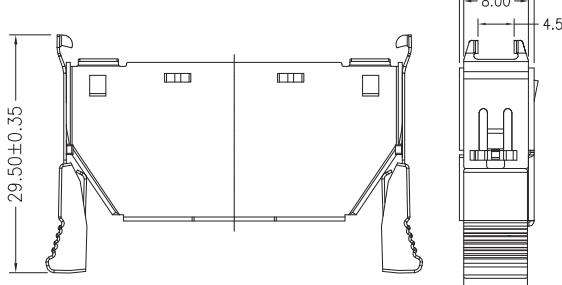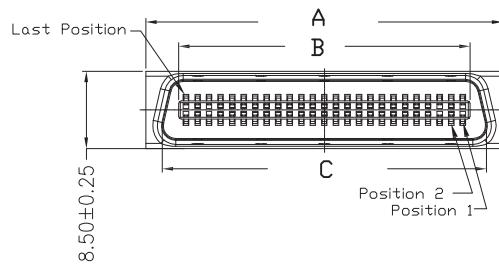

Positions	A	B	C	D
14	16.45	12.85	9.25	13.95
36	30.42	26.82	23.22	27.92
50	48.9	59.7	67.7	8.5



CN Type Solder Male SCSI Connector + Snap-Fit Type Plastic Cover

SCSI 焊线公头装配式卡扣CN型 (20,26)

Insulator	PBT UL 94-V0
Plastic Cover	ABS
Shell	Spcc
Pin Contact	Phosphor bronze
Current Rating	1Amp
Insulator Resistance	500MΩ MIN
Contact Resistance	35mΩ Max
Temperature	-55° C to +105° C



FUYSC021-1(20p)

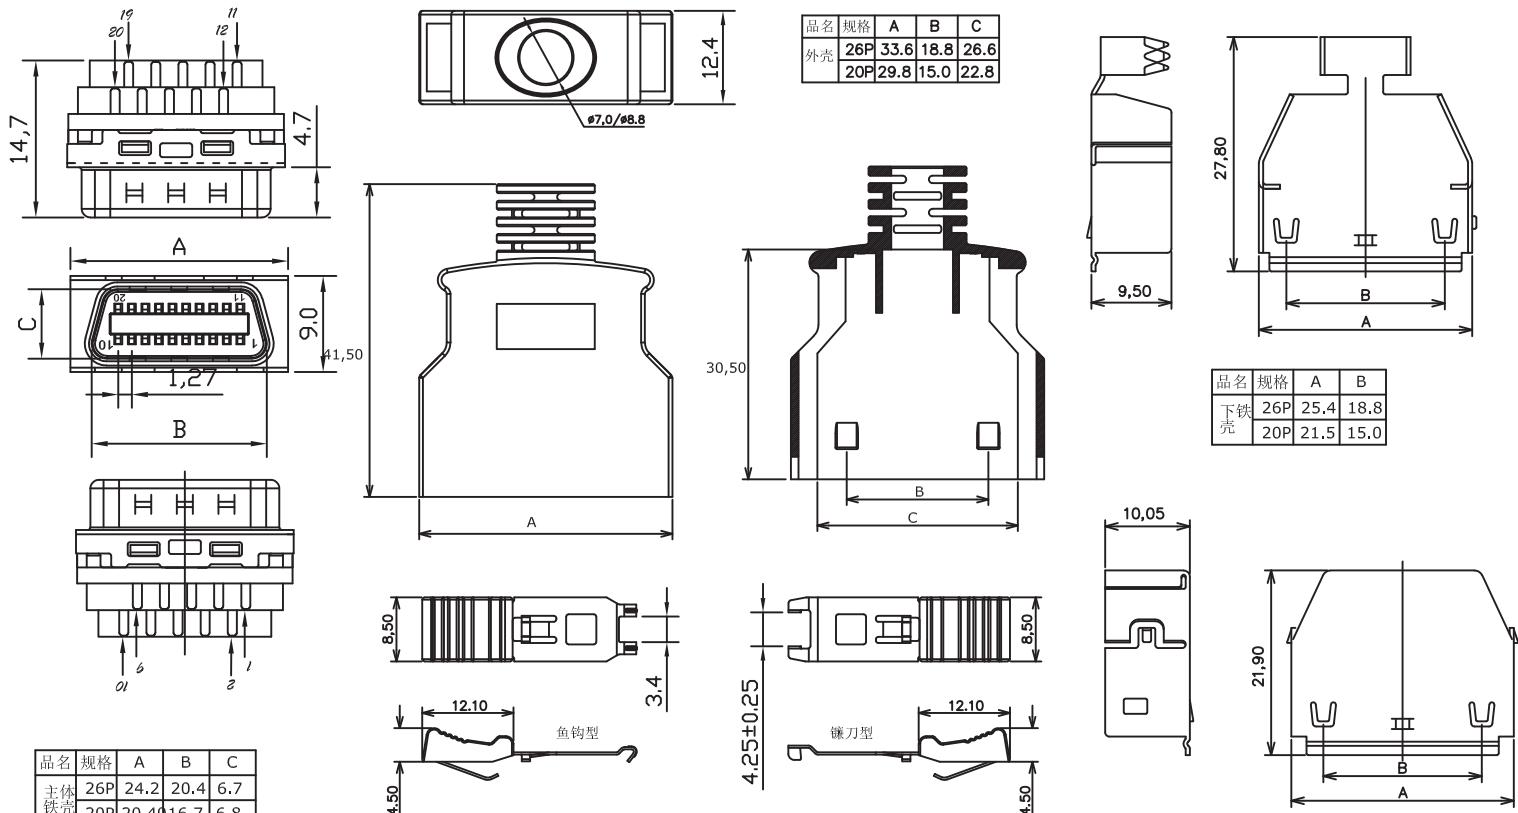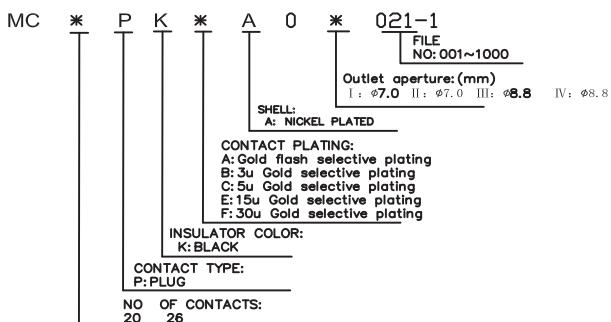

品名	規格	A	B	C
主体	26P	24.2	20.4	6.7
铁壳	20P	20.40	16.7	6.8

品名	規格	A	B
上铁壳	26P	26.5	18.8
	20P	22.6	15.0

CN Type Solder Male SCSI Connector + Screw Type Plastic Cover

SCSI焊线公头装配式螺丝型CN型 (14, 20, 26, 36, 50)

Insulator	PBT UL 94-V0
Plastic Cover	PBT UL 94-V0
Shell	Spcc
Pin Contact	Phosphor bronze
Current Rating	1Amp AC/DC
Insulator Resistance	200MΩ MIN. (at 500V DC)
Contact Resistance	35mΩ Max
Temperature	-25° C to +85° C



FUYSC114-46(50P)

FUYSC114-46(14P)





FUYSC114-46(26P)


FUYSC114-46(20P)








FUYSC114-46(36P)

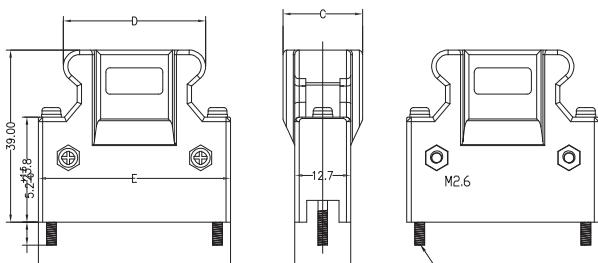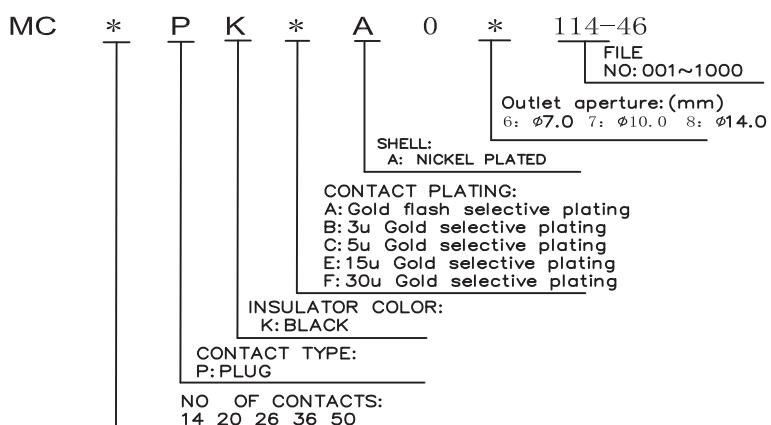

外壳PIN数	DIM A± 1.0	DIM B± 0.3	DIM C± 0.5	DIM D± 0.3	DIM E± 0.5
14P	7.00	23.60	12.70	18.20	29.50
20P	10.00	27.40	14.00	22.05	33.35
26P	10.00	31.30	14.00	25.86	37.16
36P	10.00	37.61	18.00	32.21	43.51
	14.00				
50P	14.00	46.50	18.00	41.10	52.40

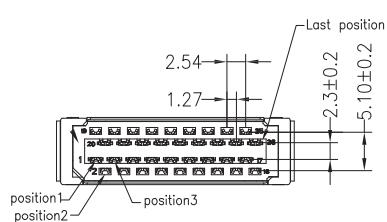

品PIN数	DIM A	DIM B
14P	7.62	13.80
20P	11.43	17.61
26P	15.24	21.42
36P	21.59	27.77
50P	30.48	36.66

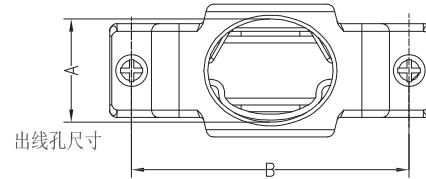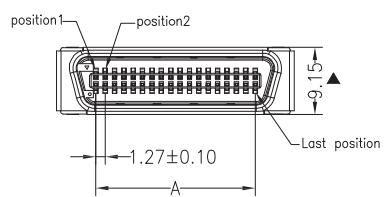

CN Type Solder Male 68pin SCSI Connector

SCSI焊线式公头主体CN型68P

Insulator	Thermoplastic UL 94-V0
Shell	Spcc
Pin Contact	Phosphor bronze
Current Rating	1Amp
Insulator Resistance	500MΩ MIN
Contact Resistance	35mΩ Max
Temperature	-55° C to +105° C



FUYSC050-21

MC * P K * A 0 0 114-46
 FILE NO: 001~1000








SHELL:
 A: NICKEL PLATED

CONTACT PLATING:
 A: Gold flash selective plating
 B: 3u Gold selective plating
 C: 5u Gold selective plating
 E: 15u Gold selective plating
 F: 30u Gold selective plating

INSULATOR COLOR:
 K: BLACK

CONTACT TYPE:
 P: PLUG

NO OF CONTACTS:
 68

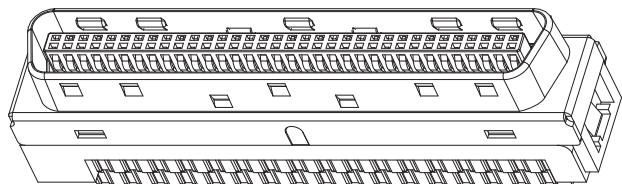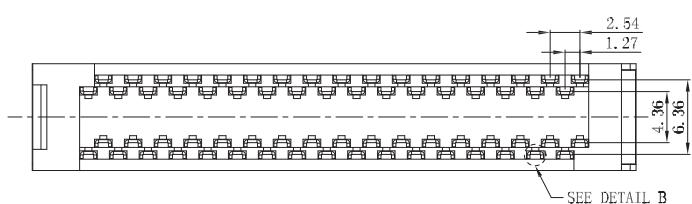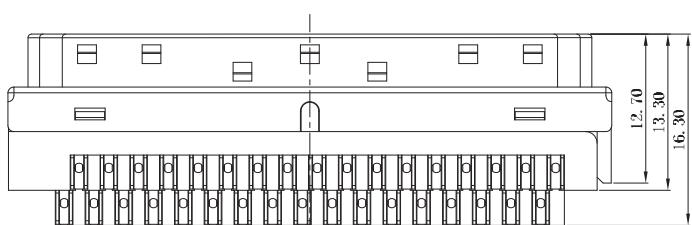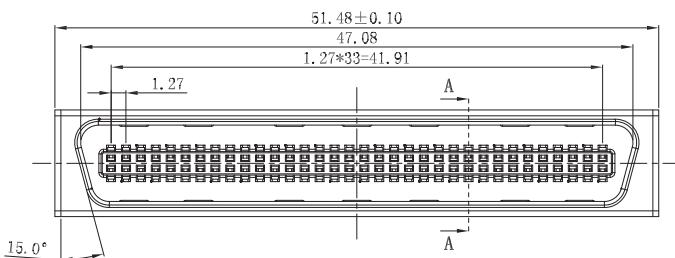







DB Type Solder Male 68pin SCSI Connector + Metal Cover

SCSI 68P焊线公头带外壳螺丝型DB型

Insulator	PBT UL 94-V0
Metal Cover	Zinc alloy
Shell	Spcc
Pin Contact	Phosphor bronze
Current Rating	1Amp
Insulator Resistance	500MΩ MIN. (at 500V DC)
Contact Resistance	30mΩ Max
Temperature	-55° C to +105° C



FUYSC113-21

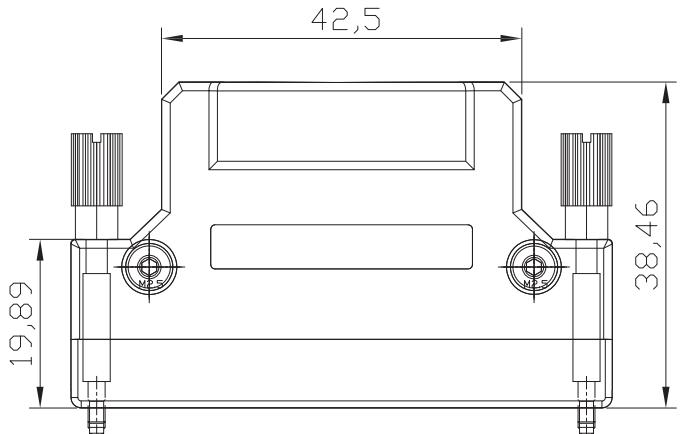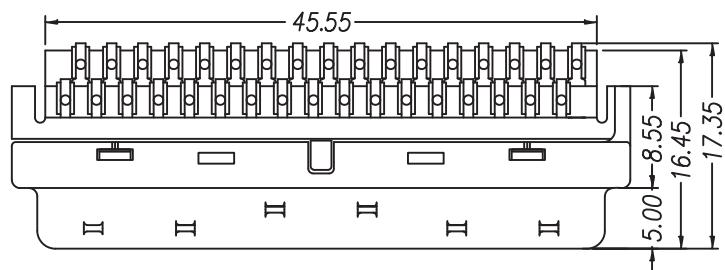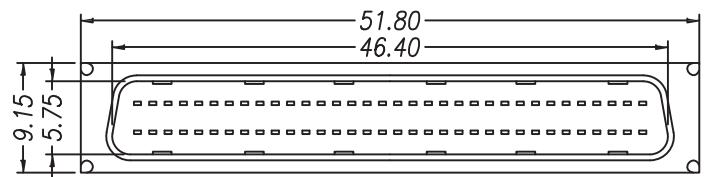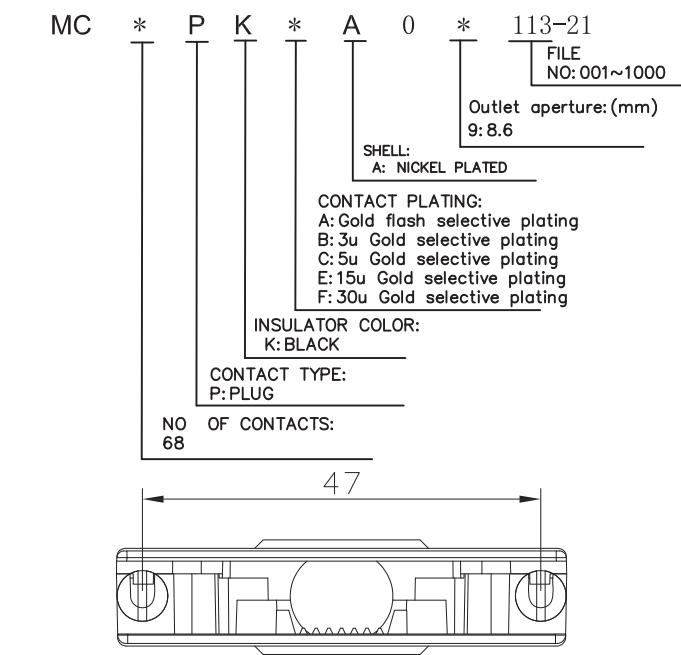





DB Type Solder Male 100pin SCSI Connector + Metal Cover

SCSI焊线式公头DB100P带外壳

Insulator	PBT UL 94-V0
Metal Cover	Zinc alloy
Shell	Spcc
Pin Contact	Phosphor bronze
Current Rating	1Amp
Insulator Resistance	500MΩ MIN. (at 500V DC)
Contact Resistance	30mΩ Max
Temperature	-55° C to +105° C




FUYSC123-46

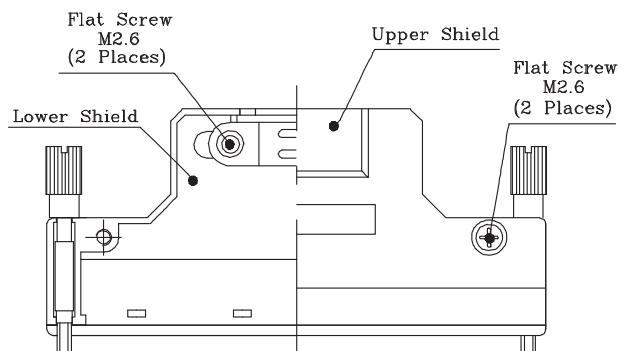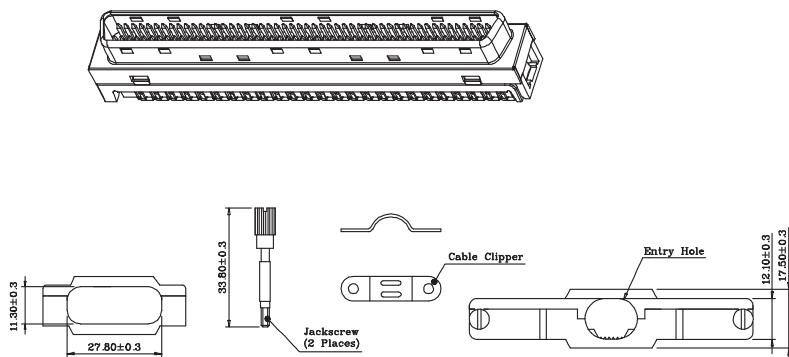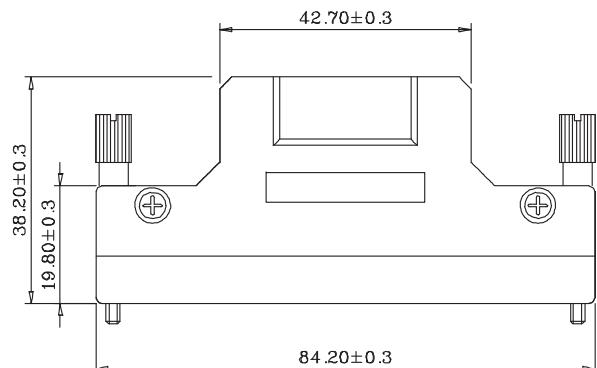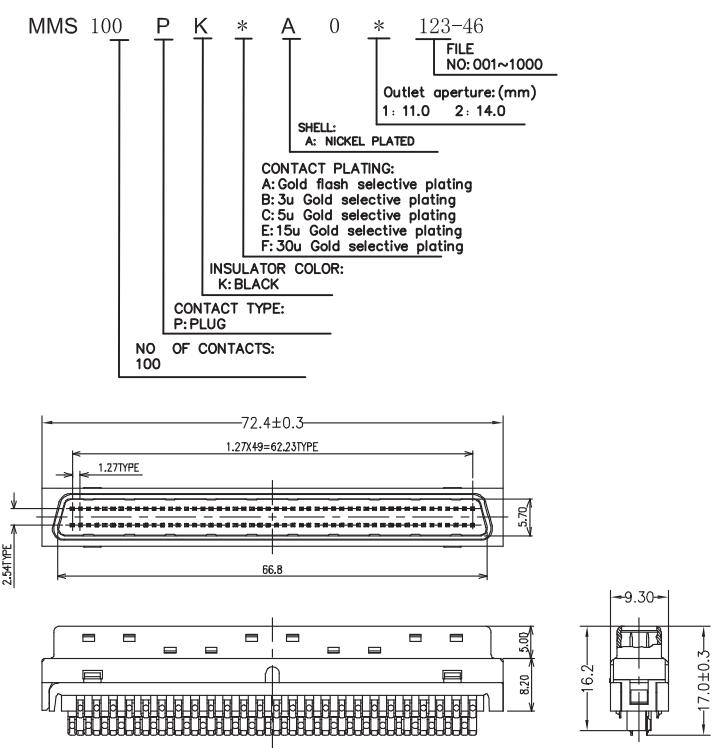

CN Type IDC Male SCSI Connector

SCSI连接器公头刺破CN型

Insulator	PBT UL 94-V0
Shell	Spcc
Pin Contact	Phosphor bronze
Current Rating	1Amp
Contact Resistance	35mΩ Max
Insulator Resistance	500 MΩ MIN
Dielectric withstanding voltage	500 AC
Temperature	-55° C to +105° C

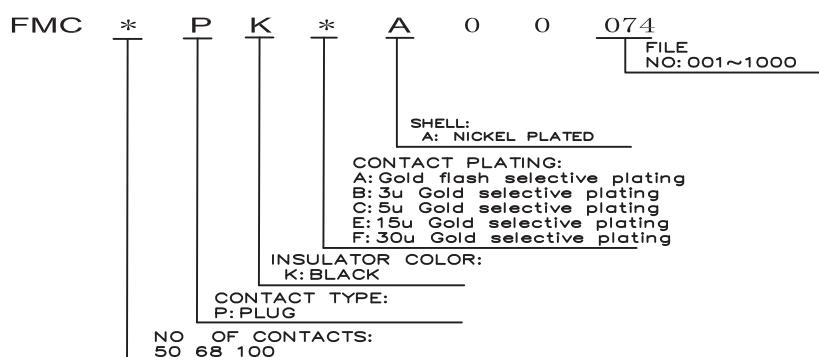







FUYSC070



FUYSC074



FUYSC073

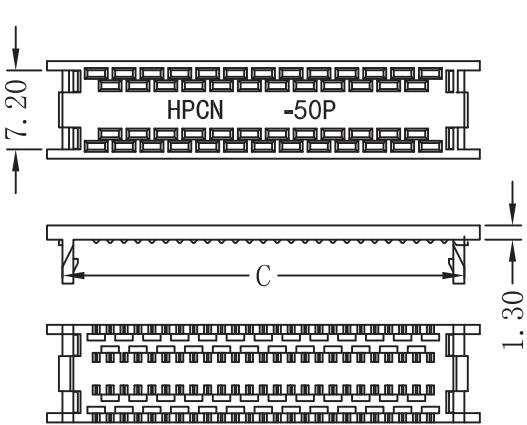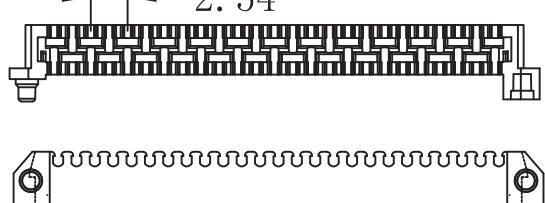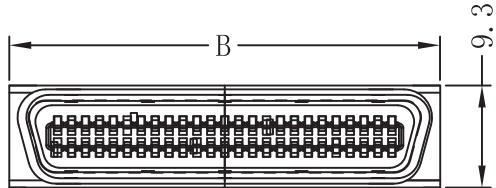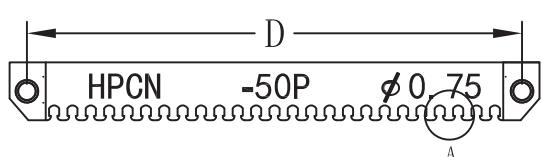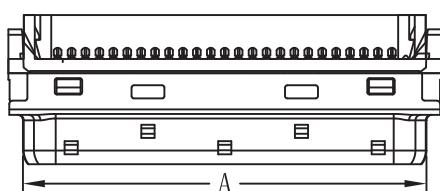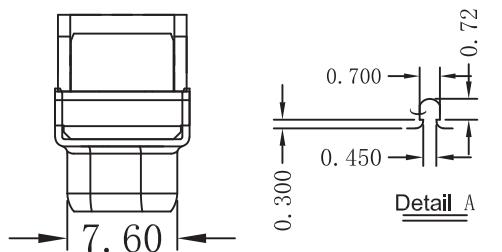

Positions	A	B	C	D
50	36.8	39.7	36.65	34.24
68	48.2	51.0	48.2	45.68
100	68.8	72.3	64.8	66.0



DB Type IDC Male SCSI Connector

SCSI连接器公头刺破DB型

Insulator	PBT UL 94-V0
Shell	Spcc
Pin Contact	Phosphor bronze
Current Rating	1Amp
Contact Resistance	30mΩ Max
Insulator Resistance	500 MΩ MIN
Dielectric withstanding voltage	250 AC
Temperature	-55° C to +105° C



FUYSC071-21

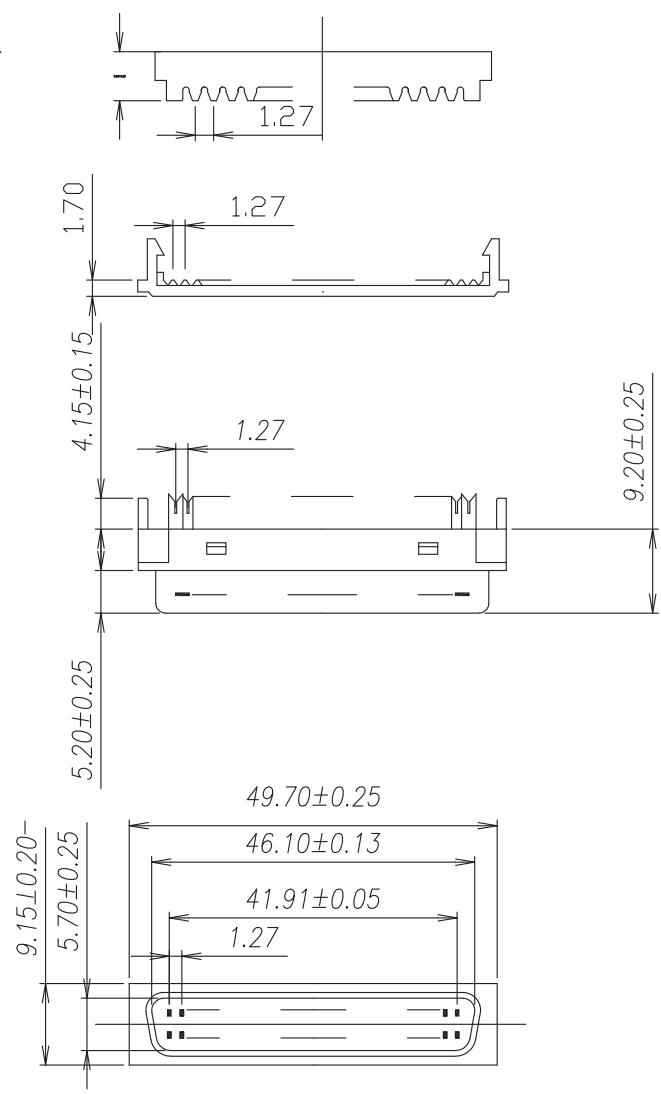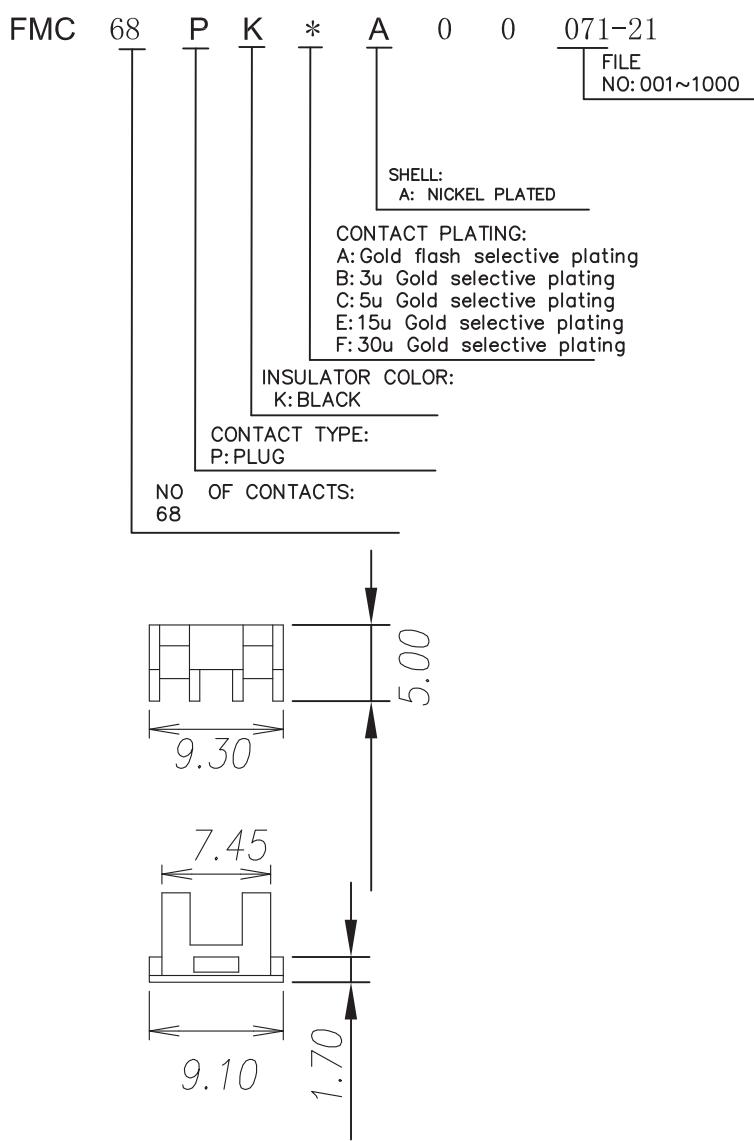


CN Type Right Angle PCB Female SCSI Connector (W/O Buckle)



SCSI 90度母座CN型无扣 (14,20,26,36,50,68,100)

Insulator	PBT UL 94-V0
Shell	Spcc
Pin Contact	Phosphor bronze
Current Rating	1Amp
Contact Resistance	35mΩ Max
Insulator Resistance	500 MΩ MIN
Dielectric withstanding voltage	500 AC
Temperature	-55° C to +105° C

MCR * S K * A D O 079-1
 FILE NO: 001~1000
 CONTACT LENGTH(MM): D: 3.0
 SHELL:
 A: NICKEL PLATED
 CONTACT PLATING:
 A: GOLD FLASH B: 3U " C: 5U"
 D: 10U" E: 15U" F: 30U"
 INSULATOR COLOR:
 B: BLUE K: BLACK
 CONTACT TYPE:
 P: PLUG
 S: SOCKET
 NO OF CONTACTS:
 14 20 26 36 50 68 100

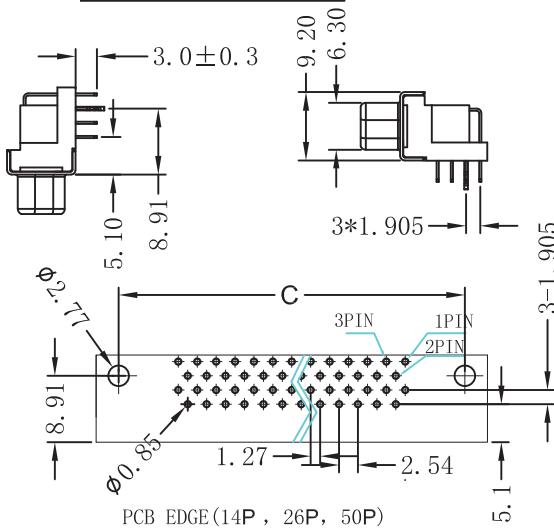



Positions	A	B	C	D
14	12.63	29.8	23.64	9.46
20	16.44	33.6	27.45	13.27
26	20.25	37.4	31.26	17.08
36	26.6	43.7	37.61	23.43
50	35.49	52.6	46.5	32.32
68	46.92	64.1	57.93	43.75
100	67.24	84.6	78.25	64.07

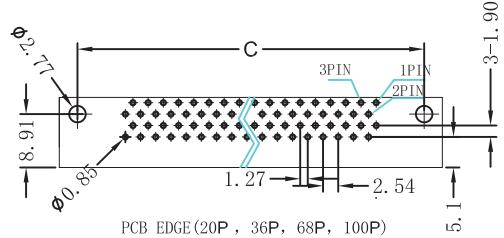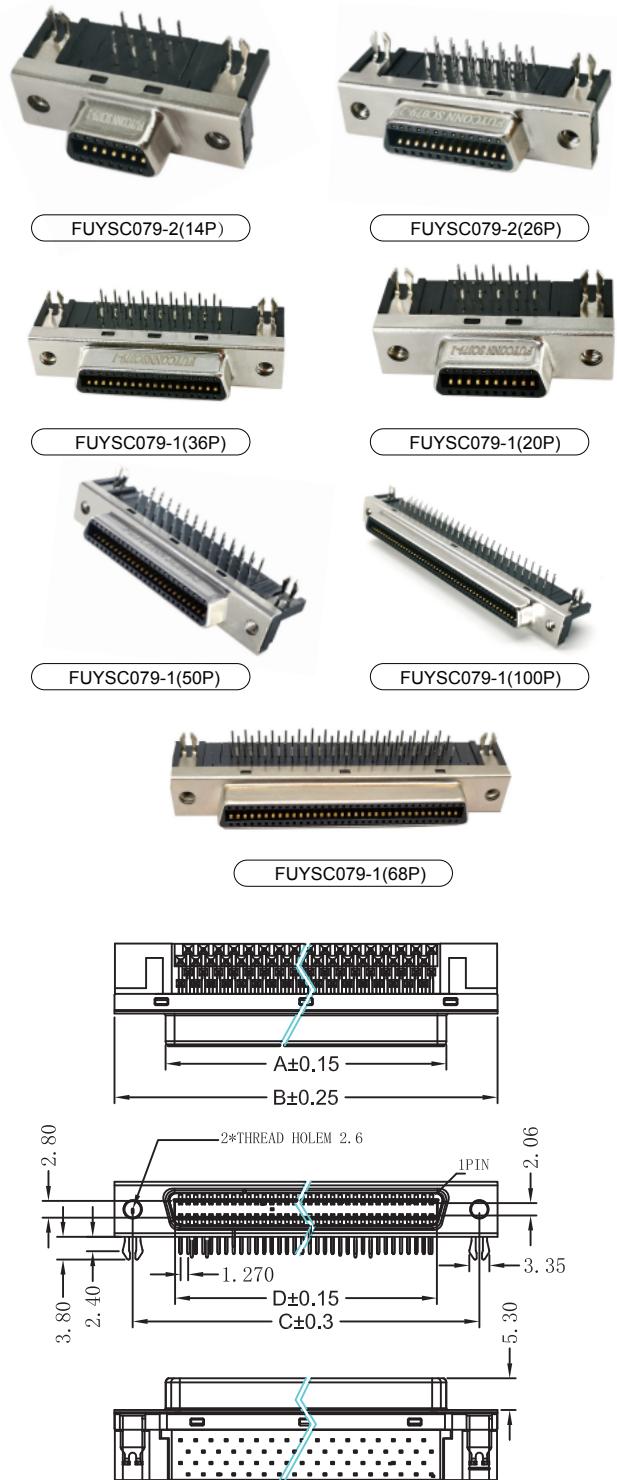



CN Type Right Angle PCB Female SCSI Connector (W/ Buckle)

SCSI 90度母座CN型带扣 (14,20,26,36,50,68,100)

Insulator	PBT UL 94-V0
Shell	Spcc
Pin Contact	Phosphor bronze
Current Rating	1Amp
Contact Resistance	35mΩ Max
Insulator Resistance	500 MΩ MIN
Dielectric withstanding voltage	500 AC
Temperature	-55° C to +105° C

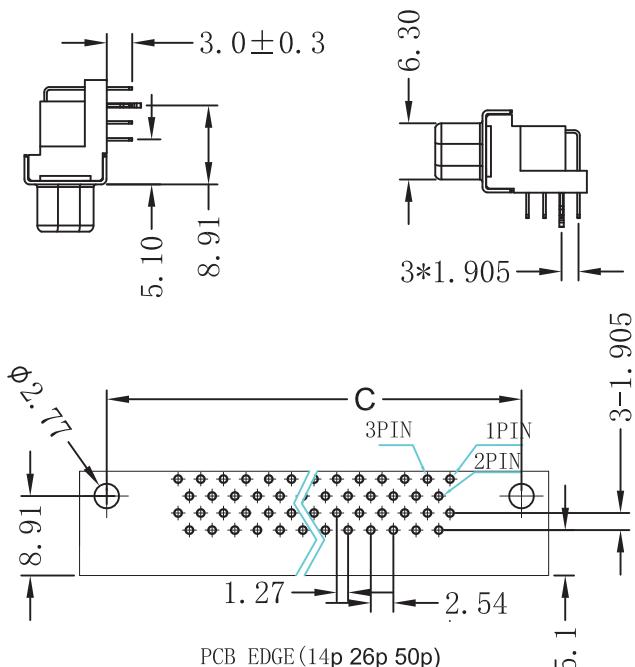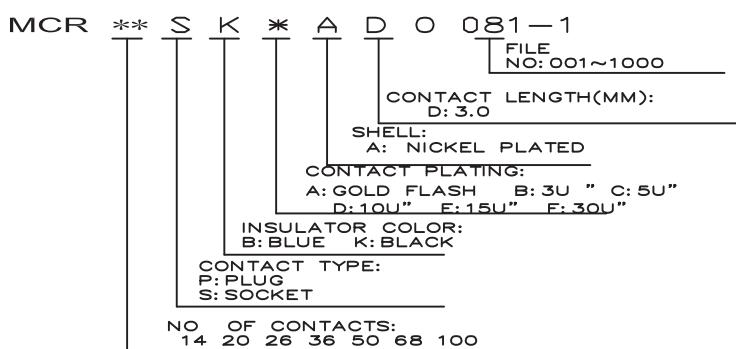

Positions	A	B	C	D
14	12.63	29.8	23.64	9.46
20	16.44	33.6	27.45	13.27
26	20.25	37.4	31.26	17.08
36	26.6	43.7	37.61	23.43
50	35.49	52.6	46.5	32.32
68	46.92	64.1	57.93	43.75
100	67.24	84.6	78.25	64.07

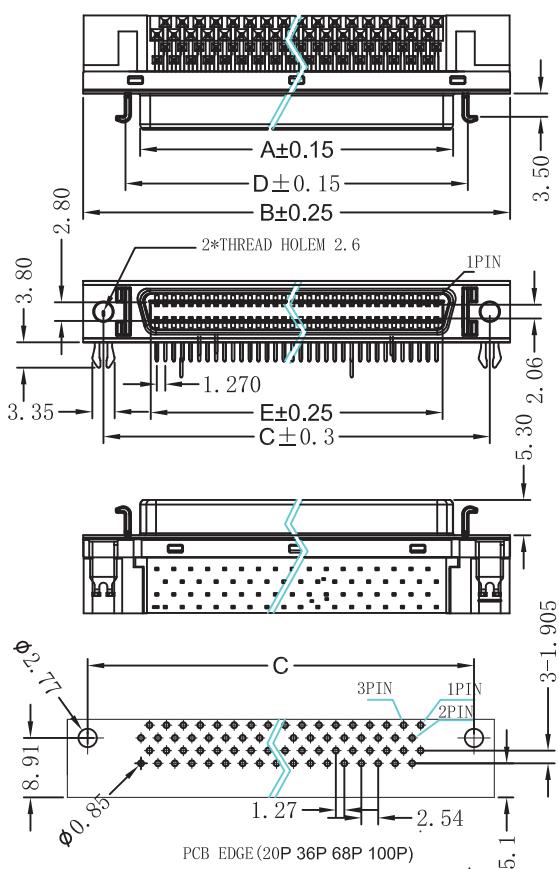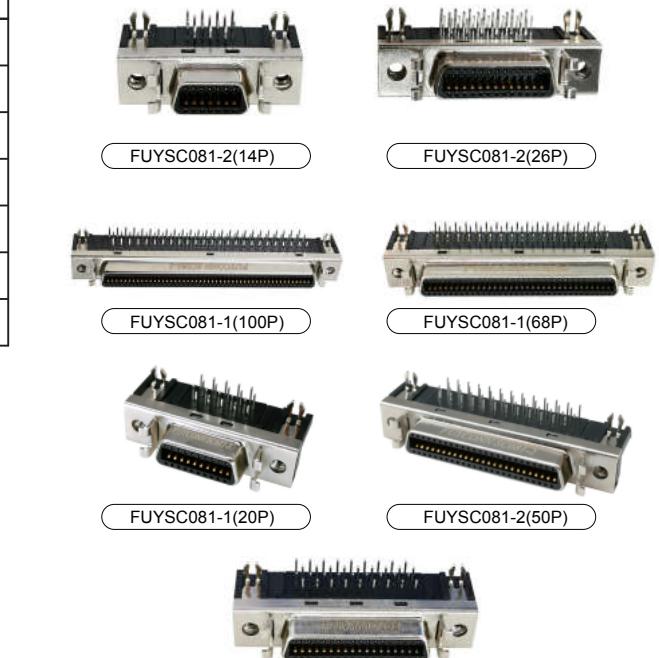


CN Type Right Angle PCB Female SCSI Connector (Zinc Alloy Shell)

SCSI 90度母座CN型锌合金卡扣式 (14,20,26,36,50,68,100)


Insulator	PBT UL 94-V0
Shell	Zinc Alloy
Contact	Copper Alloy
Current Rating	1Amp
Contact Resistance	30mΩ Max
Insulator Resistance	500 MΩ MIN
Dielectric withstanding voltage	500 AC
Temperature	-55° C to +105° C



MCR ** S K * A E O 124-46
 FILE NO: 001~1000
 CONTACT LENGTH(MM):
 E: 3.2
 SHELL:
 A: NICKEL PLATED
 CONTACT PLATING:
 A: GOLD FLASH B: 3U " C: 5U"
 D: 10U" E: 15U" F: 30U"
 INSULATOR COLOR:
 B: BLUE K: BLACK
 CONTACT TYPE:
 P: PLUG
 S: SOCKET
 NO OF CONTACTS:
 14 20 26 36 50

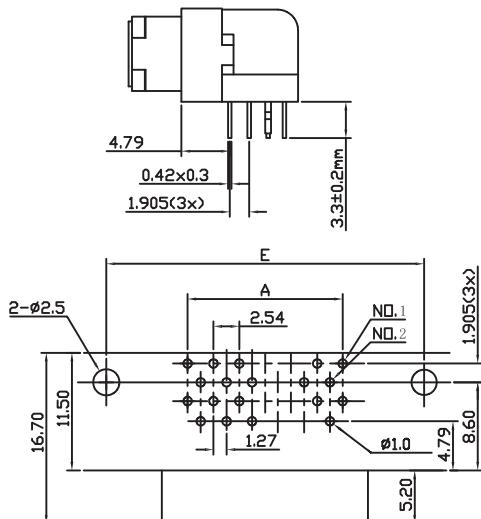

PCB LAYOUT



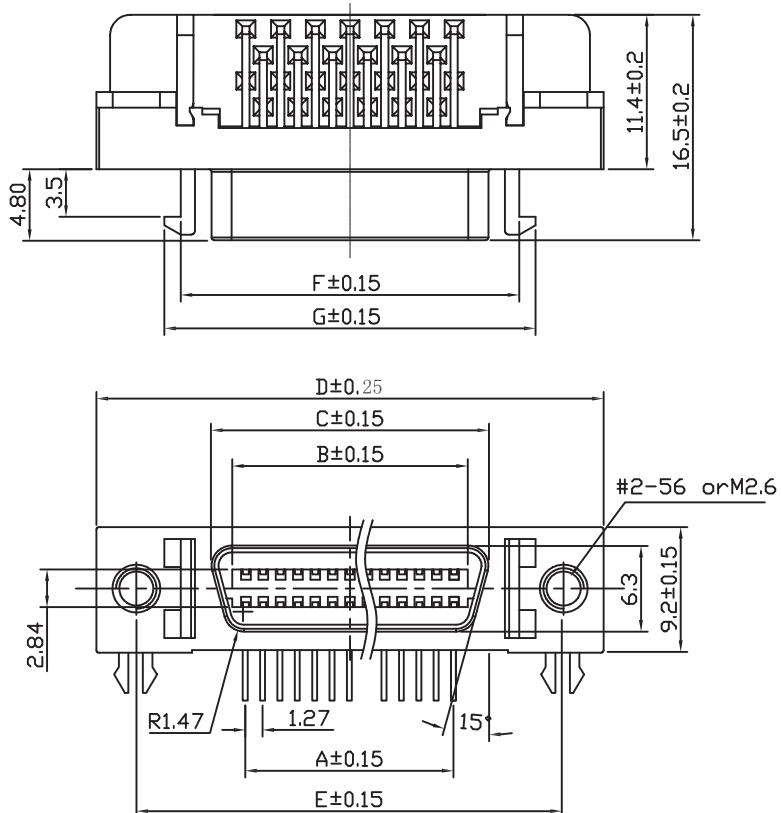


No. of Pin	DIMENSIONS						
	A	B	C	D	E	F	G
14	7.62	9.59	12.6	29.51	23.64	17.25	19.58
20	11.43	13.40	16.43	33.32	27.45	21.06	23.10
26	15.24	17.21	20.24	37.13	31.26	24.76	27.2
36	21.59	23.56	26.5	43.48	37.61	31.11	33.55
50	30.48	32.45	35.39	52.37	46.5	40.0	42.44


DB Type Right Angle PCB Female SCSI Connector (Zinc Alloy Shell)

SCSI 90度母座DB型锌合金卡扣式 (20, 26, 40, 50, 68, 100)

Insulator	PBT UL 94-V0
Shell	Zinc Alloy
Pin Contact	Copper Alloy
Current Rating	1Amp
Contact Resistance	35mΩ Max
Insulator Resistance	500 MΩ MIN
Dielectric withstanding voltage	500 AC
Temperature	-40° C to +105° C

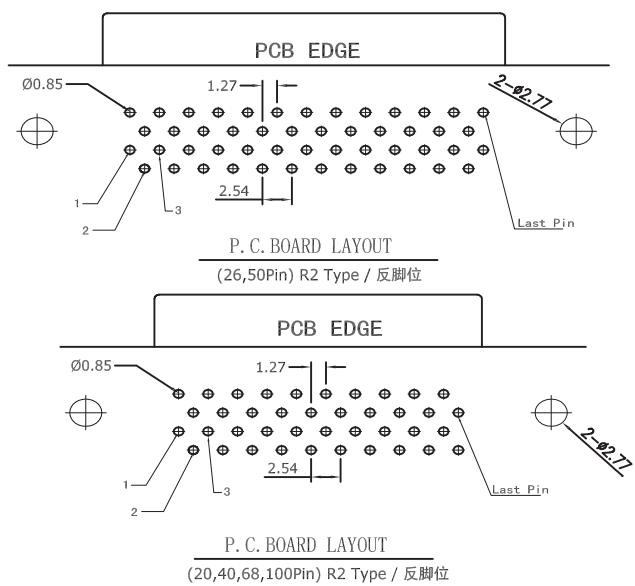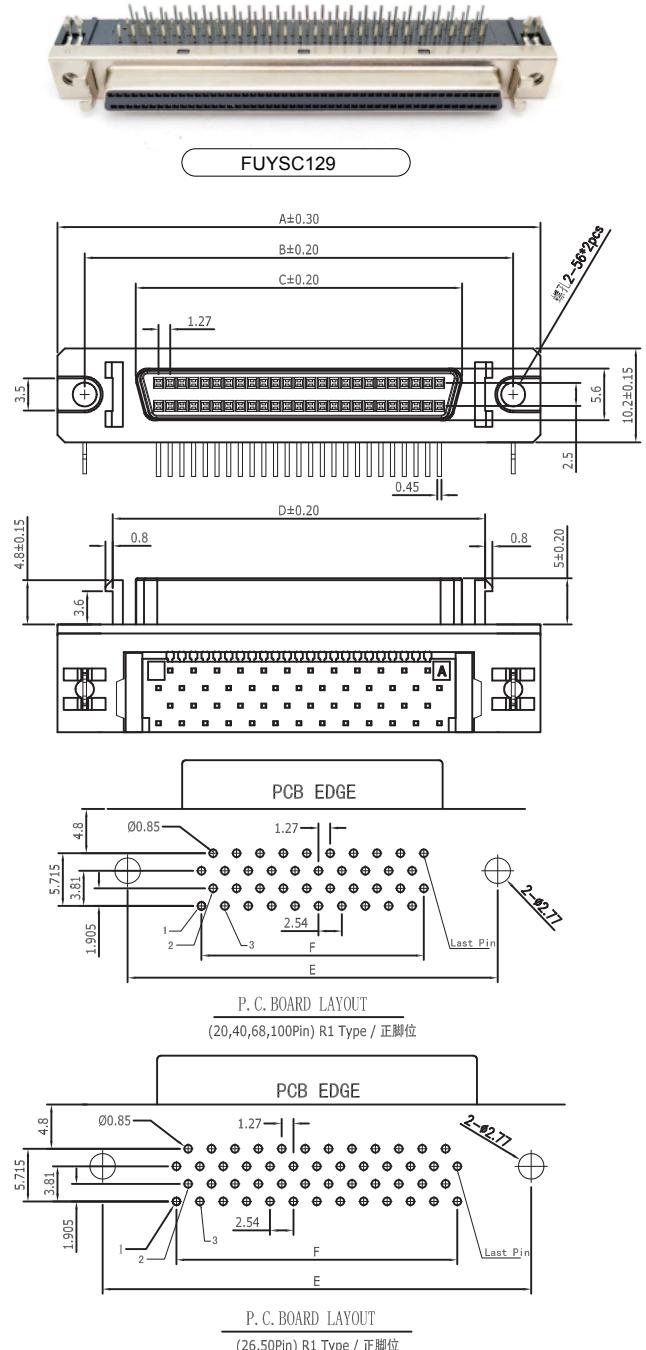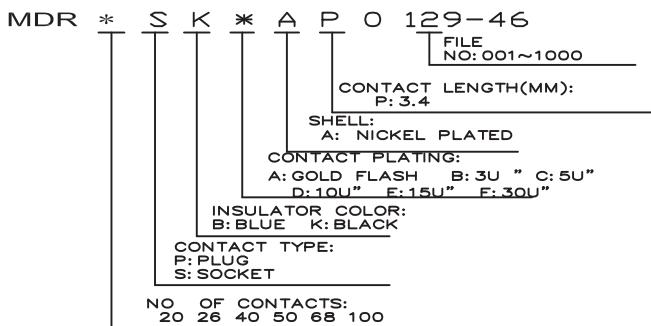




No. of Pin	DIMENSIONS					
	A	B	C	D	E	F
20	33.50	27.60	15.64	20.80	27.60	11.43
26	37.19	31.26	19.45	24.65	31.26	15.24
40	46.10	40.15	28.25	33.70	40.15	24.13
50	52.43	46.50	34.70	40.30	46.50	30.48
68	63.86	57.93	46.13	51.32	57.93	41.91
100	84.18	78.23	66.45	71.50	78.23	62.23

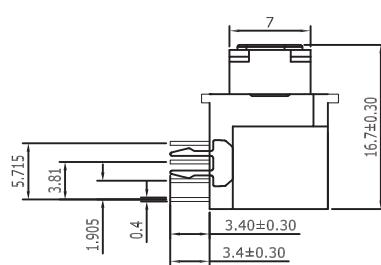



CN Type Straight PCB Female SCSI Connector (W/O Buckle)

SCSI 180度母座CN型无卡扣 (14,20,26,36,50,68,100)

Insulator	PBT UL 94-V0
Contact	Phosphor bronze
Current Rating	1Amp
Contact Resistance	35mΩ Max
Insulator Resistance	500 MΩ MIN
Dielectric withstanding voltage	500 AC
Temperature	-55° C to +105° C

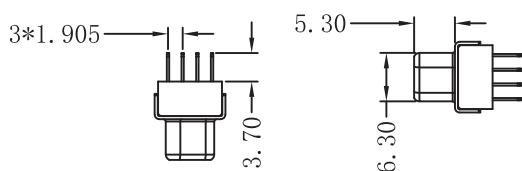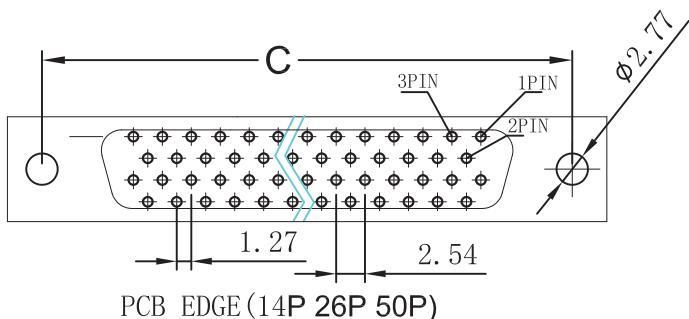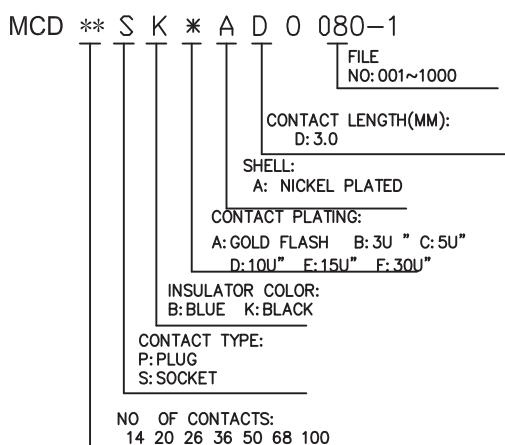


Positions	A	B	C	D	E
14	12.03	12.63	23.64	29.8	9.46
20	15.84	16.44	27.45	33.6	13.27
26	19.65	20.25	31.26	37.4	17.08
36	26.0	26.6	37.61	43.7	23.43
50	34.89	35.49	46.5	52.6	32.32
68	46.32	46.92	57.93	64.1	43.75
100	66.8	67.24	78.25	84.6	64.07

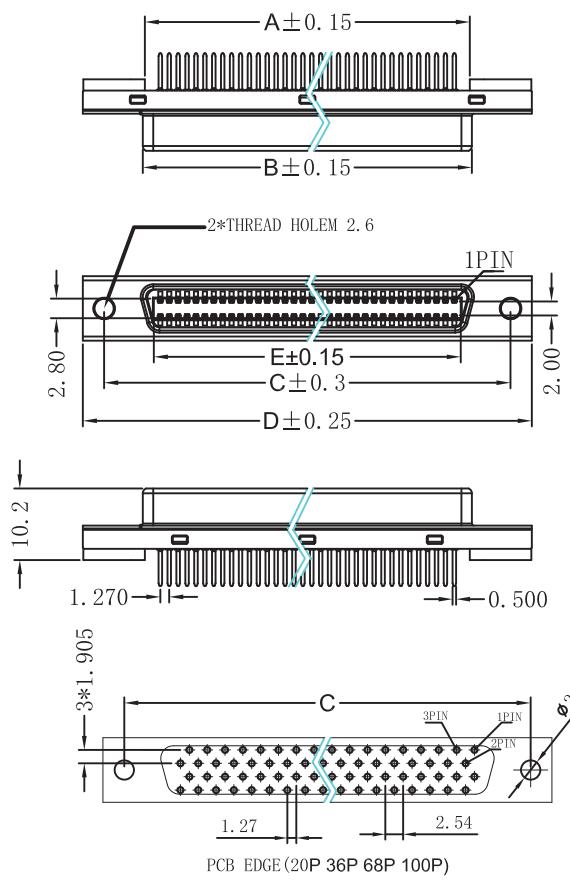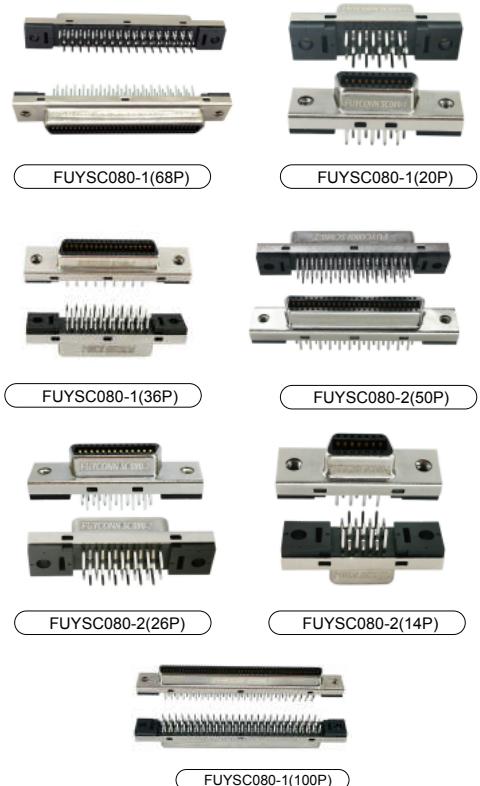

CN Type Straight PCB Female SCSI Connector (W/ Buckle)

SCSI 180度母座CN型带扣 (14,20,26,36,50,68,100)

Insulator	PBT UL 94-V0
Shell	Spcc
Contact	Phosphor bronze
Current Rating	1Amp
Contact Resistance	35mΩ Max
Insulator Resistance	500 MΩ MIN
Dielectric withstanding voltage	500 AC
Temperature	-55° C to +105° C

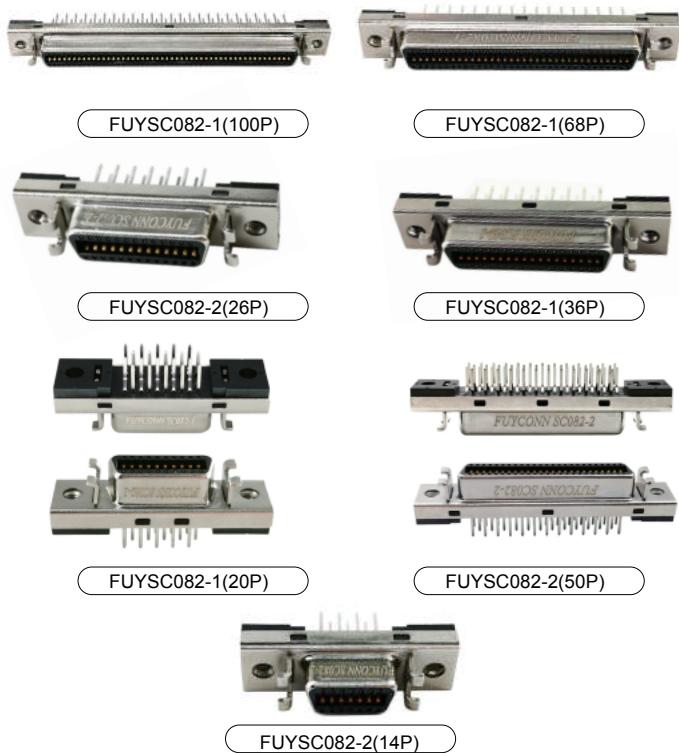

MCD * S K * A O O 082-1
FILE NO: 001~1000




SHELL:
A: NICKEL PLATED

CONTACT PLATING:
A: GOLD FLASH B: 3U " C: 5U "
D: 10U " E: 15U " F: 30U "

INSULATOR COLOR:
B: BLUE K: BLACK

CONTACT TYPE:
P: PLUG
S: SOCKET

NO OF CONTACTS:
14 20 26 36 50 68 100

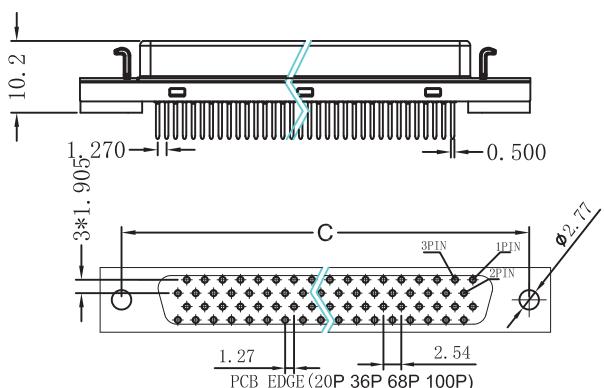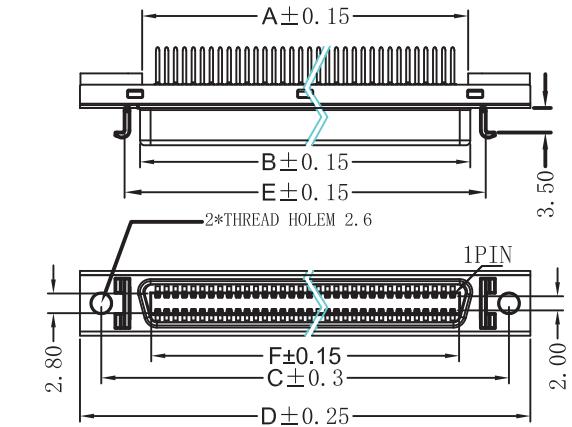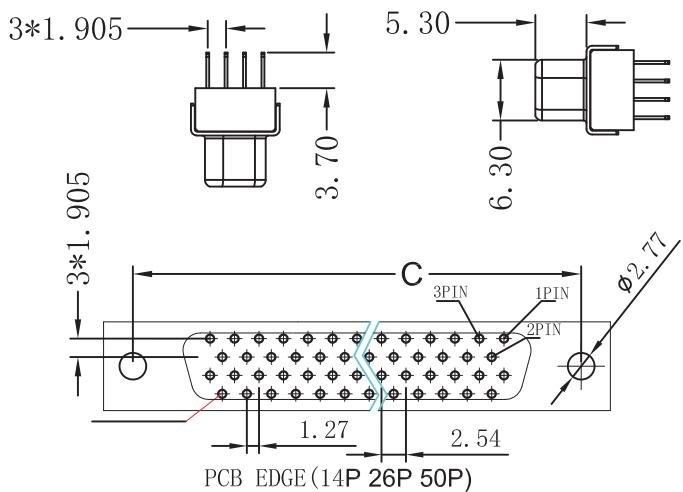


Positions	A	B	C	D	E	F
14	12.03	12.63	23.64	29.8	17.04	9.46
20	15.84	16.44	27.45	33.6	20.85	13.27
26	19.65	20.25	31.26	37.4	24.66	17.08
36	26.0	26.6	37.61	43.7	31.01	23.43
50	34.89	35.49	46.5	52.6	39.9	32.32
68	46.32	46.92	57.93	64.1	51.32	43.75
100	66.8	67.24	78.25	84.6	71.65	64.07



CN Type Straight PCB Female SCSI Connector (Zinc Alloy Shell)

SCSI 180度母座CN型带扣锌合金 (14,20,26,36,50,68,100)

Insulator	PBT UL 94-V0
Shell	Zinc Alloy
Pin Contact	Phosphor bronze
Current Rating	1Amp
Contact Resistance	30mΩ Max
Insulator Resistance	500 MΩ MIN
Dielectric withstanding voltage	500 AC
Temperature	-55° C to +105° C

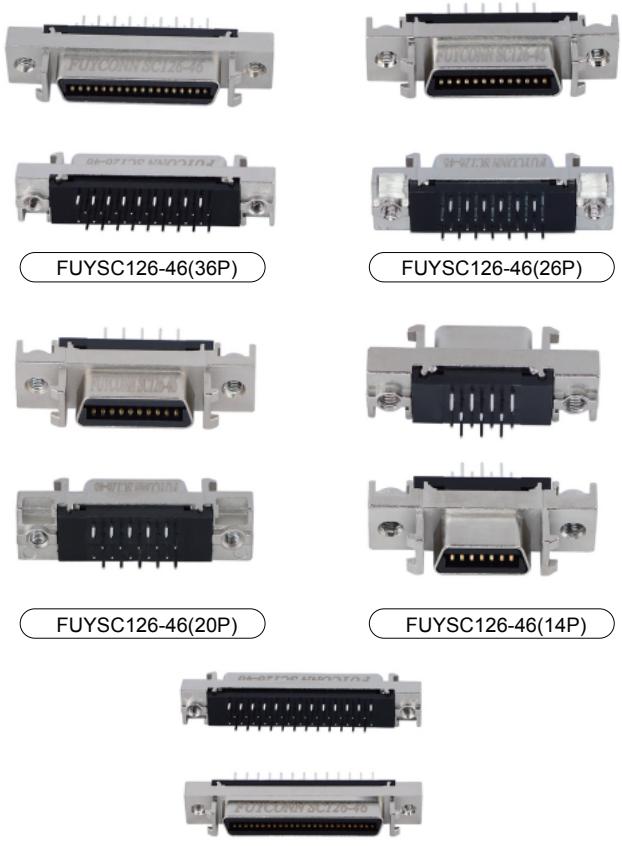


MCD * S K * A E O 126-46
FILE NO: 001~1000
CONTACT LENGTH(MM):
E: 3.2
SHELL:
A: NICKEL PLATED
CONTACT PLATING:
A: GOLD FLASH B: 3U " C: 5U"
D: 10U" E: 15U" F: 30U"
INSULATOR COLOR:
B: BLUE K: BLACK
CONTACT TYPE:
P: PLUG
S: SOCKET
NO OF CONTACTS:
14 20 26 36 40 50 68 100

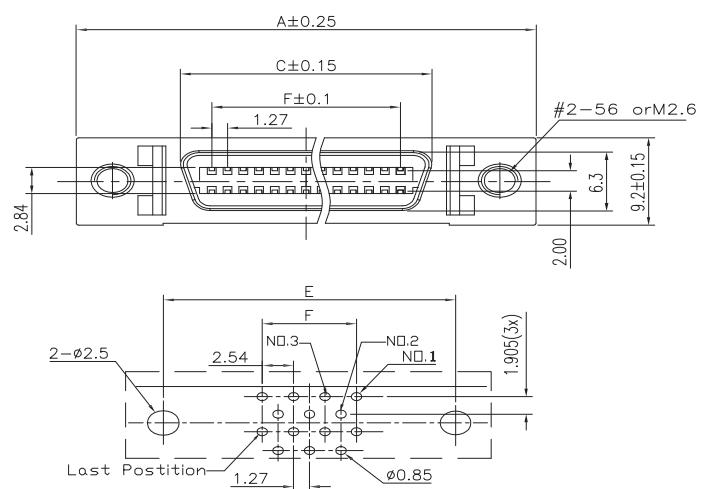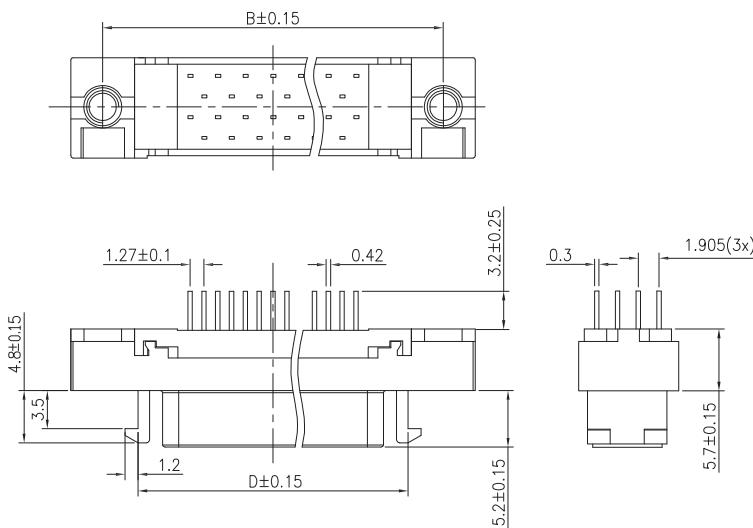

No. of Pin	DIMENSIONS					
	A	B	C	D	E	F
14	29.51	23.64	12.6	17.25	23.64	7.62
20	33.32	27.45	16.43	21.06	27.45	11.43
26	37.13	31.26	20.24	24.76	31.26	15.24
36	43.48	37.61	26.5	31.11	37.61	21.59
40	46.08	40.15	29.14	33.30	40.15	24.13
50	52.37	46.5	35.39	40.0	46.5	30.48
68	64.00	57.92	46.90	51.00	57.92	41.91
100	84.18	78.23	67.14	71.50	78.23	62.23

PCB Layout
(14,26,50 Pos)


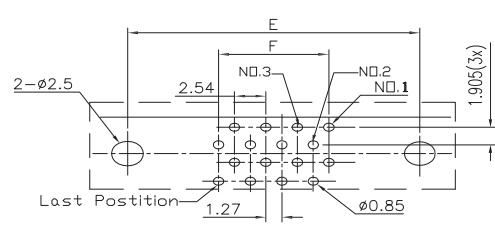


PCB Layout
(20,36,40,68,100 Pos).

DB Type Straight PCB Female SCSI Connector (Zinc Alloy Shell)

SCSI 180度母座DB型带扣锌合金 (50, 68, 100)

Insulator	PBT UL 94-V0
Shell	Zinc Alloy
Contact	Copper Alloy
Current Rating	1Amp
Contact Resistance	35mΩ Max
Insulator Resistance	500 MΩ MIN
Dielectric withstanding voltage	500 AC
Temperature	-40 ° C to +105 ° C

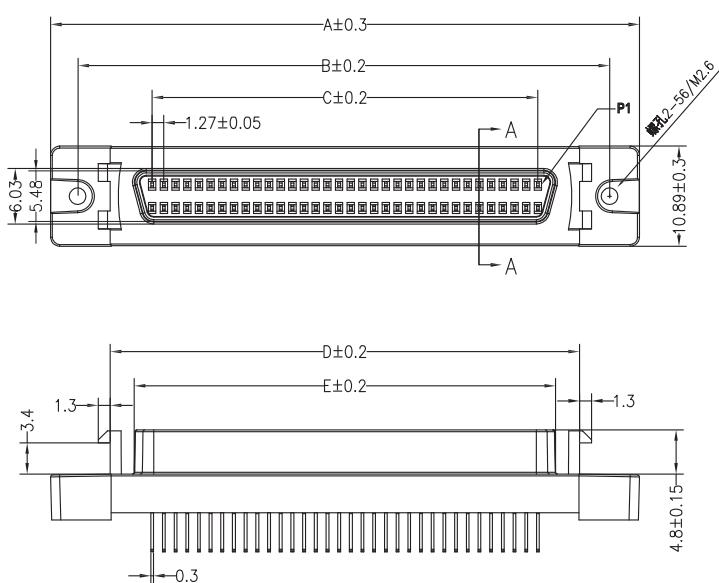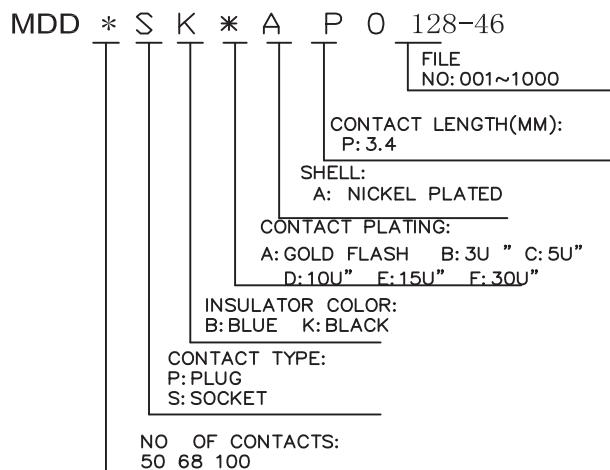

No. of Pin	DIMENSIONS				
	A	B	C	D	E
50	52.55	46.37	30.48	39.57	34.35
68	64.00	57.77	41.91	51.00	45.78
100	84.20	77.70	62.23	71.20	66.10



FUYSC128-46(68P)



FUYSC128-46(50P)

