
General tolerances ISO 2768-m unless stated. Not to scale: geometry per STEP, dimensions in mm. If anodized, dimensions apply before coating (fits allow 25 um).

Underside recess (fits over the bottom-case lip): ±0.1, corners R4.3

TOP CASE - ABS or Al 6061 (raw or anodized) - thickness 9.0 - outer corners R4, top edge fillet R1.5

Underside recess 2.4 deep (presses top gaskets) opening corners R1.0 (2 mm end mill)

F-row bridge 4.51 wide hides the 0.25U gap 8x magnet pocket D5.6 x 2.1 (underside)

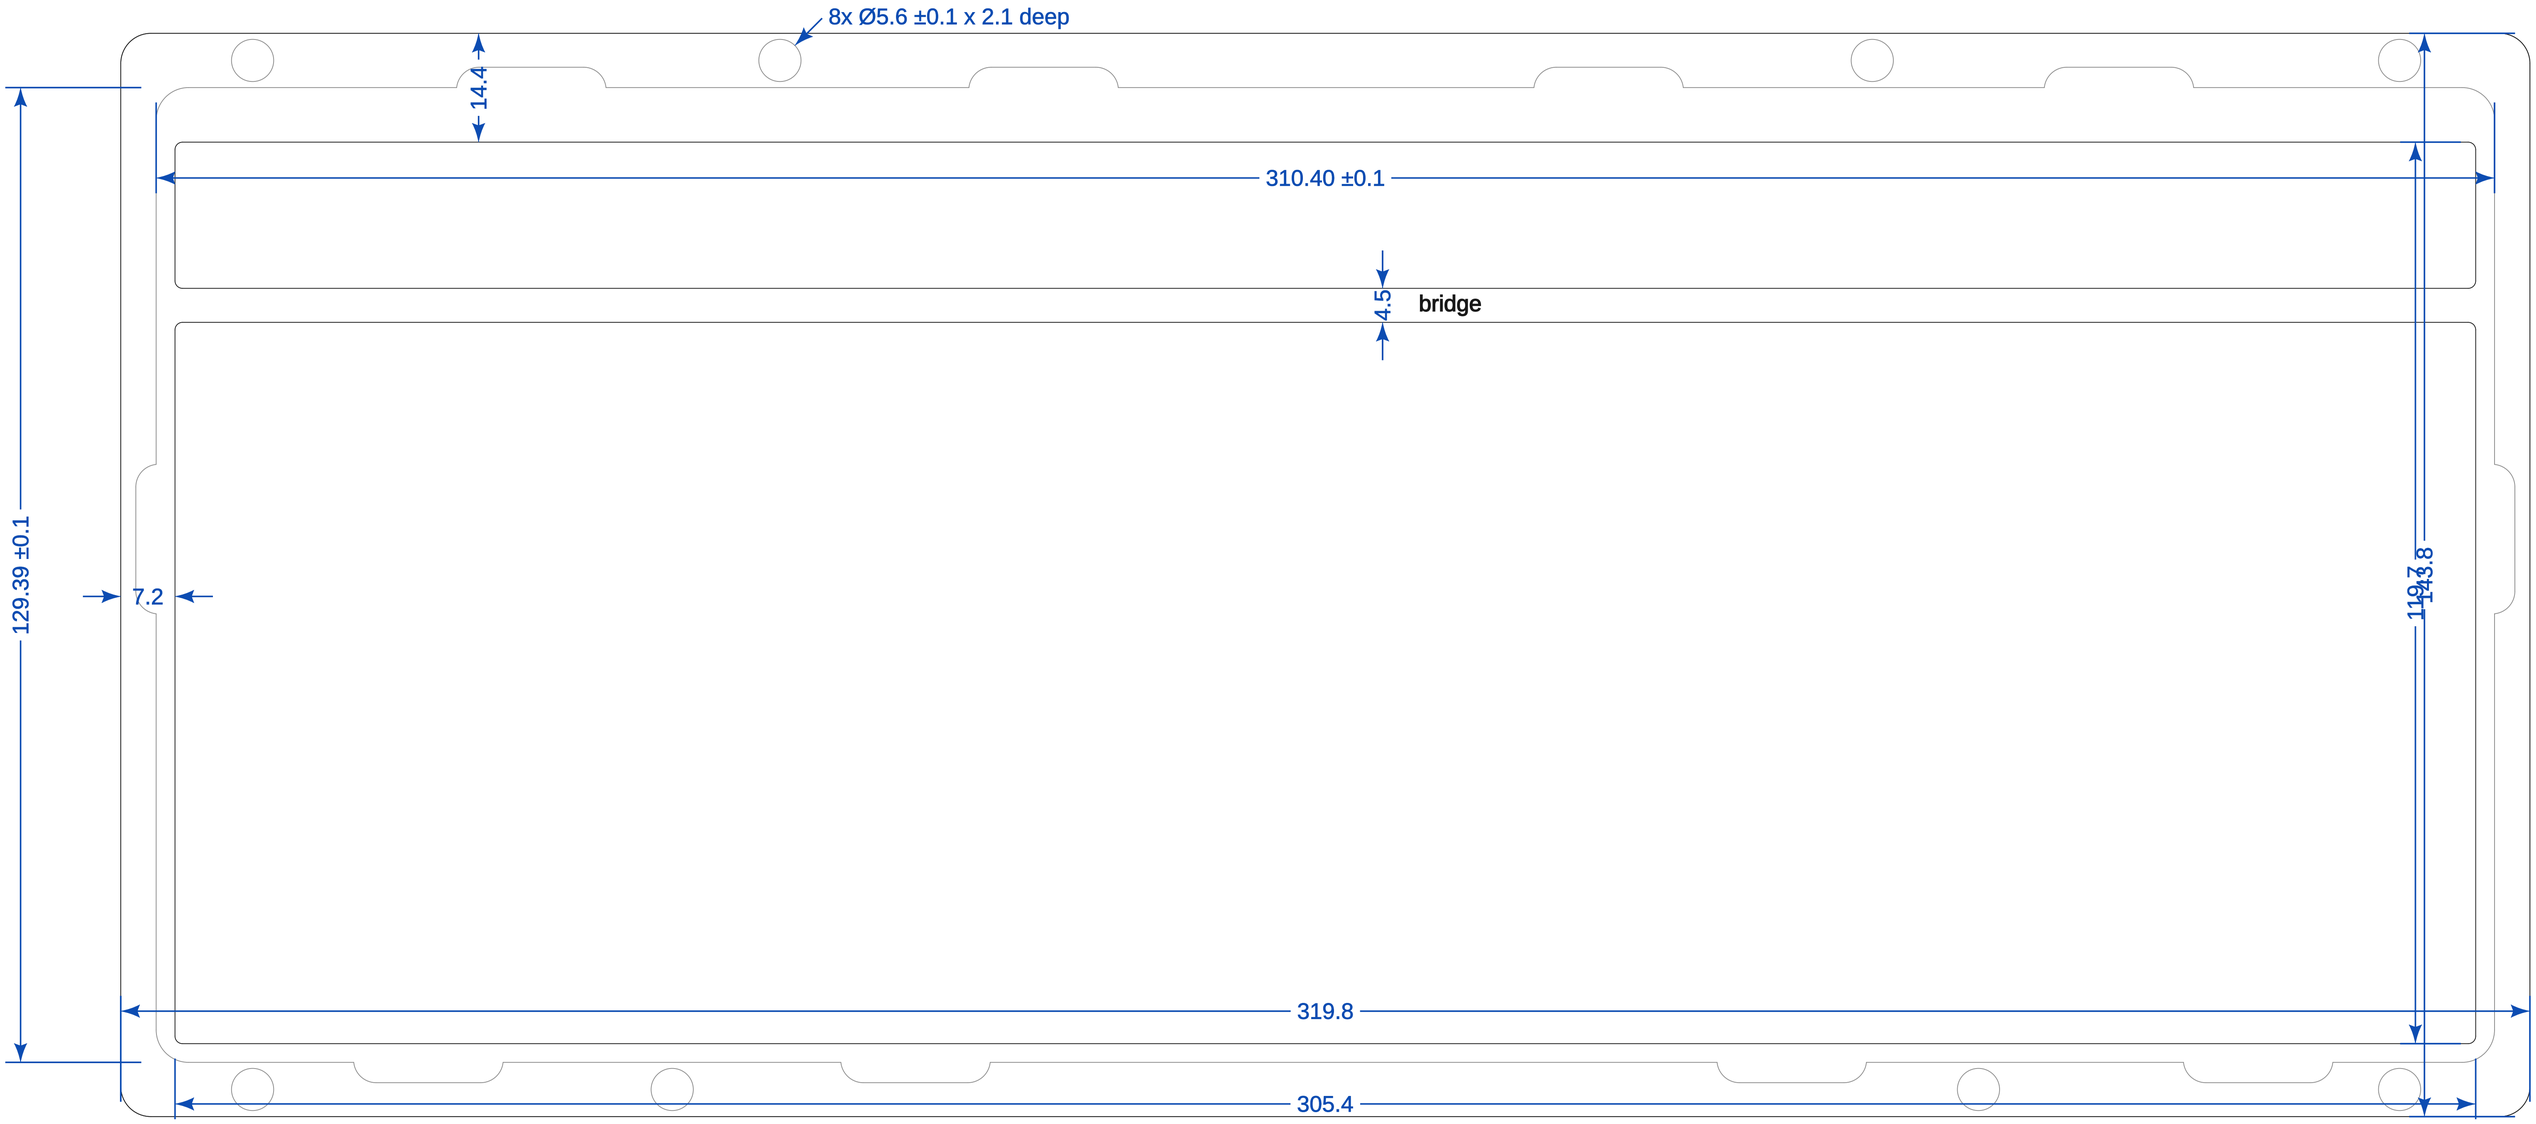

Sheet 2 - Top case (top view; grey = underside recess, tab & magnet pockets)