General tolerances ISO 2768-m unless stated. Not to scale: geometry per STEP, dimensions in mm. If anodized, dimensions apply before coating (fits allow 25 um).

Alignment lip outer contour (fits into the top-case recess): ±0.1, corners R4.05


USB-C slot: stadium 13.0 x 7.5 through back wall, centre 8.21 below parting face, x = 152.47 from key-area left edge

BOTTOM CASE - ABS or Al 6061 (raw or anodized) - setup 1: top (cavity, lip, pockets) - setup 2: underside at 8 deg - setup 3: back face (USB slot)

Cavity floor 11.51 below parting face; alignment lip 1.5 high x 1.05 wide

Tab ledges 3.9 below parting face 8x magnet pocket D5.6 x 2.1

Underside: 4x foot recess D10.4 x 1.0

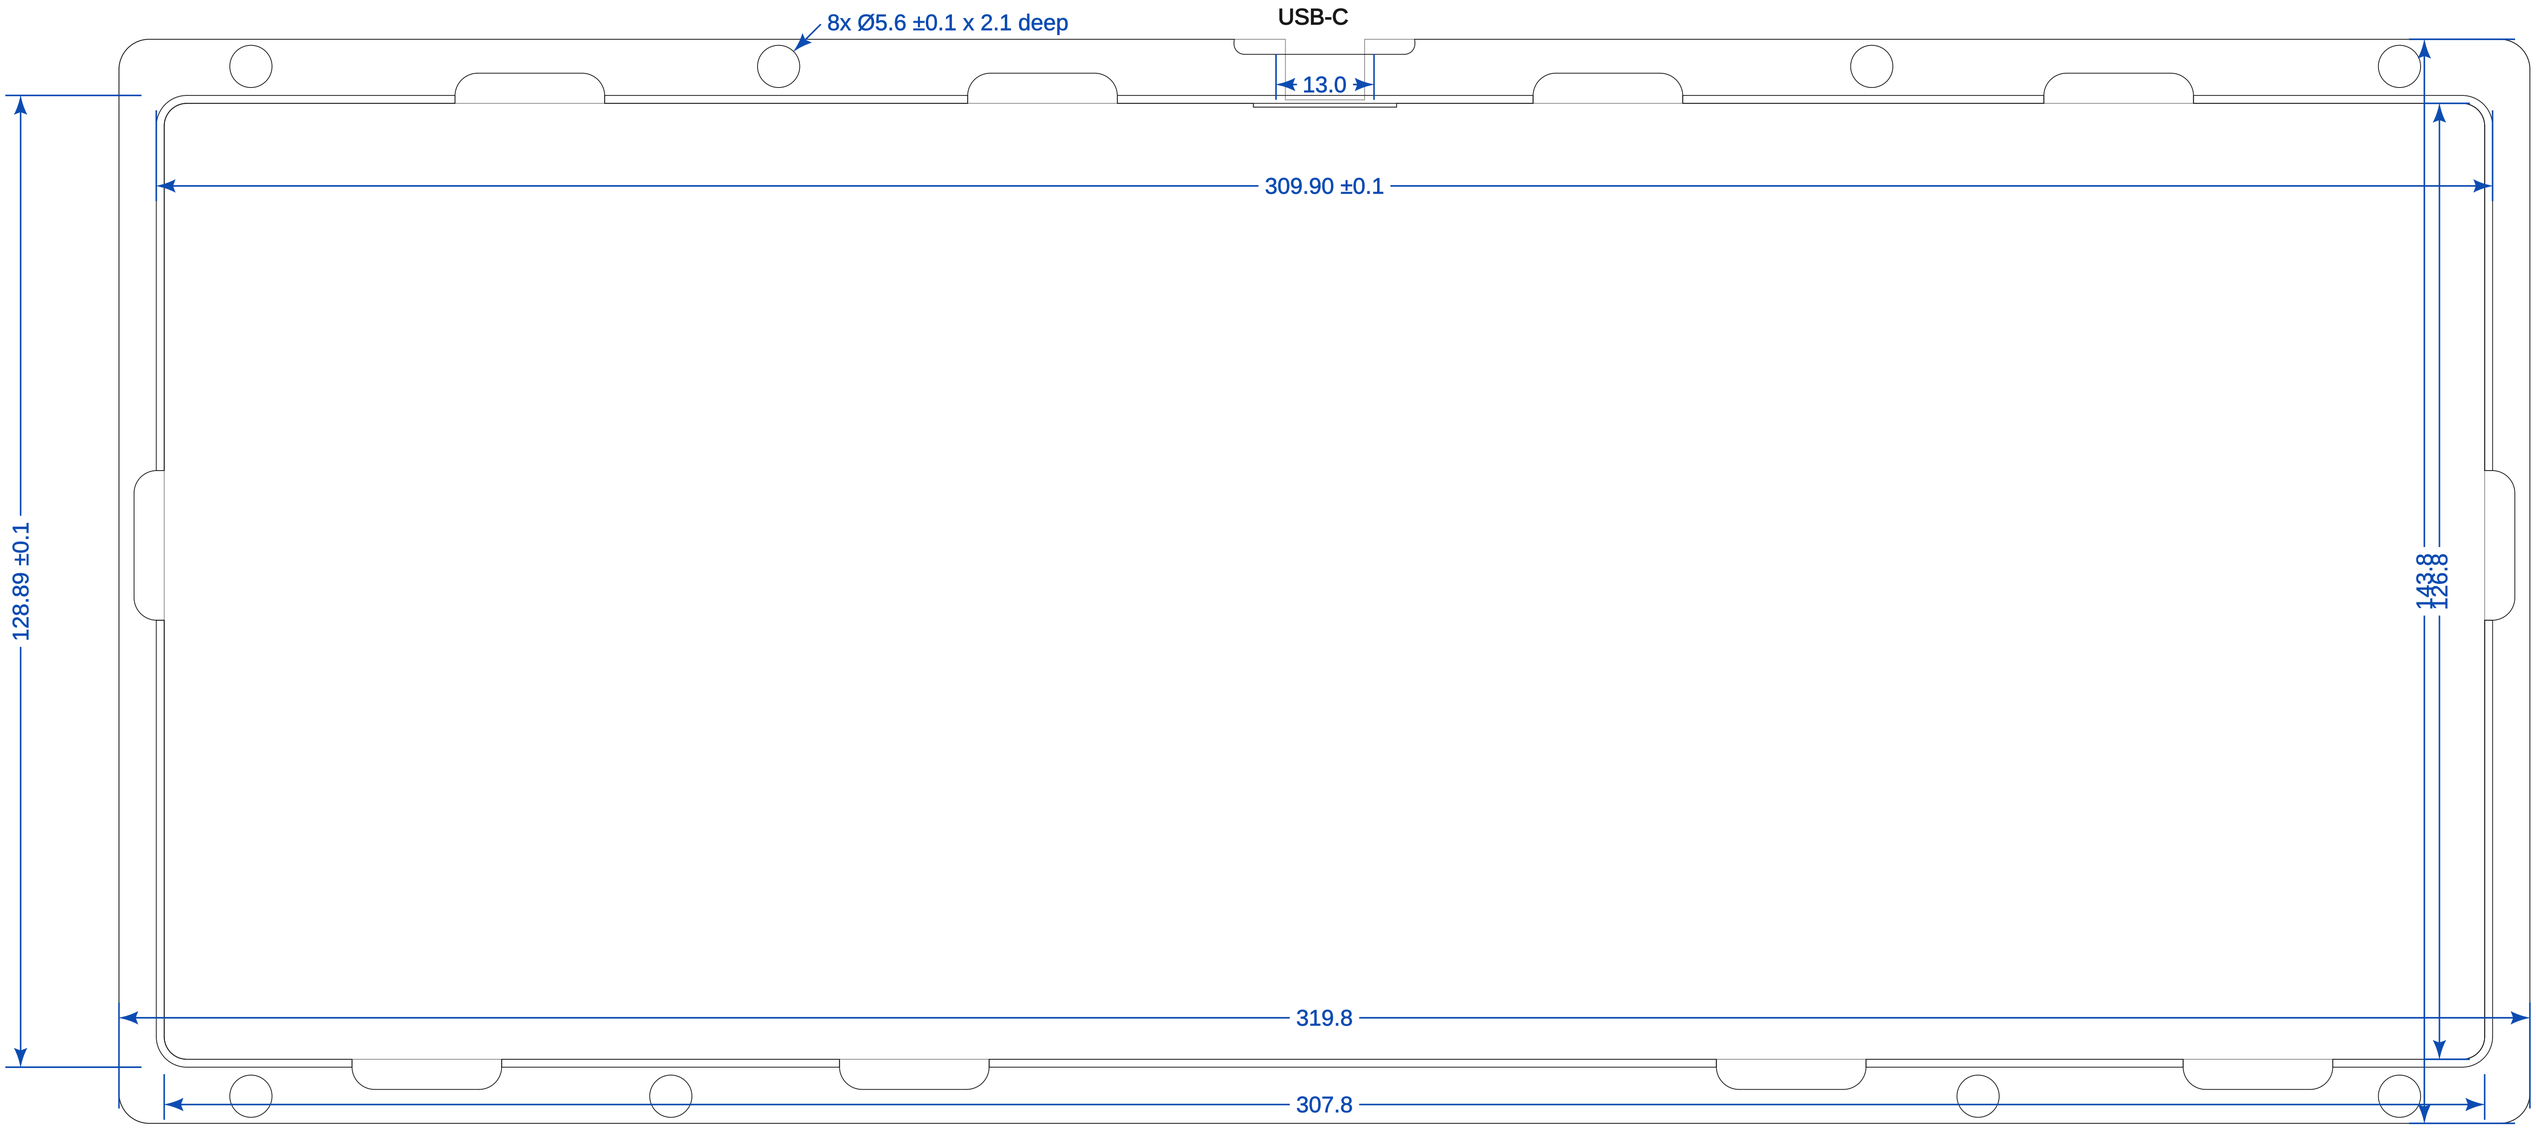

Sheet 3 - Bottom case (top view; grey = cavity floor and feet)