Battery LiFePO4
Deep Cycle - 25.6V100Ah

N/P: AS-34L0G8-1003-812

TELPERION® By A&S POWER

Charge Specifications

Recommended Charge Current	5A-20A
Maximum Charge Current	100A
Recommended Charge Voltage	29,2±0,2 v
High Voltage Disconnect	30V
High Voltage Reconnect	29,6V

Certifications

Conception	8S1P
Certifications	CE | ONU38.3 | IEC62619*
Shipping Classification	ONU 3480 | CLASS 9
Cell Type	LiFePO4 - 3.2V 100Ah Grade A

Discharge Specifications

Continuous Discharge Current	100A(0.5C Recommended)
Peak Discharge Current	150A (10s)
Disconnect Charge Current	300A (3s)
Low Voltage Disconnect	16V
Discharge Cut-off Voltage	20V
Short Circuit Protection	Yes

Temperature Specifications

Charge Temperature	-0° to 45°C
Discharge Temperature	-20° to 60°C
High Disconnect Temperature	Up to 60°C
High Reconnect Temperature	Up to 55°C
Storage Temperature	-10° to 50°C

Electrical Specifications

Voltage	25,6 Volt
Capacity	100Ah
Capacity @ 20A	300 min
Nominal capacity	2560Wh
Auto- Discharge	≤3% per month
Maximum Unit in Series	2
Maximum Unit in Parallel	2

Mechanical Specifications

Dimensions	(Long x Depth x Height)
(in./mm.)	522x240x220mm
Weight	19kg
Terminal Type	M8

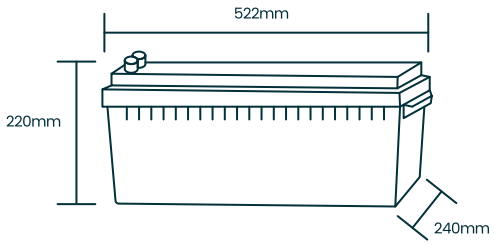

Number of Cycles According to Depth of Discharge % DoD

Discharge 30% DoD	7000 ≥ cycles
Discharge 80% DoD	4000 ≥ cycles
Discharge 100% DoD	2000 ≥ cycles

Performance conditions: 25°C and 0.2C

* Cell manufacturer test report and IEC CERT 62619

©2024 Telperion - All rights reserved

Performance Graphs

Differente Rate Discharge Curve

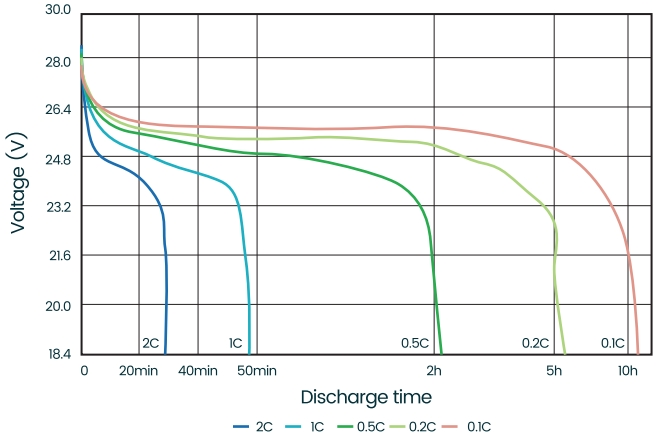

Differente Temperature Discharge Curve

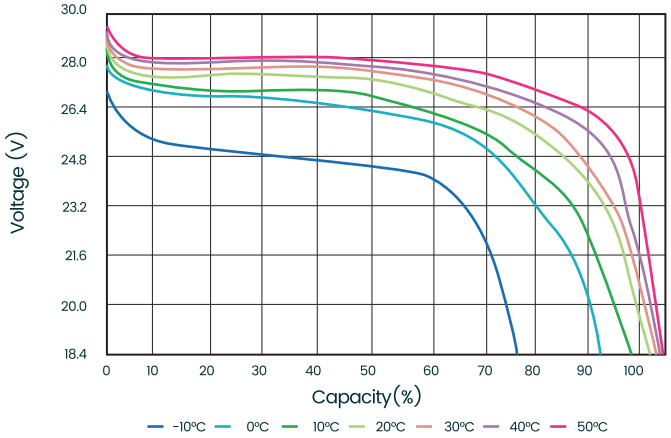

Characteristics Curve

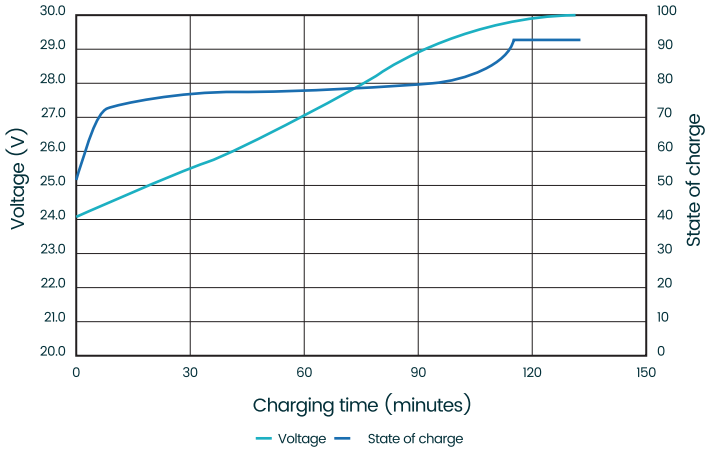

Characteristics Curve

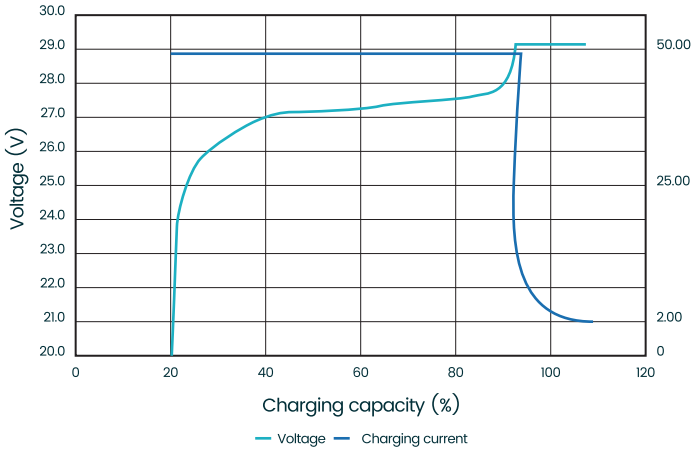

Cycle Life Curve 25°C @ 0.2C

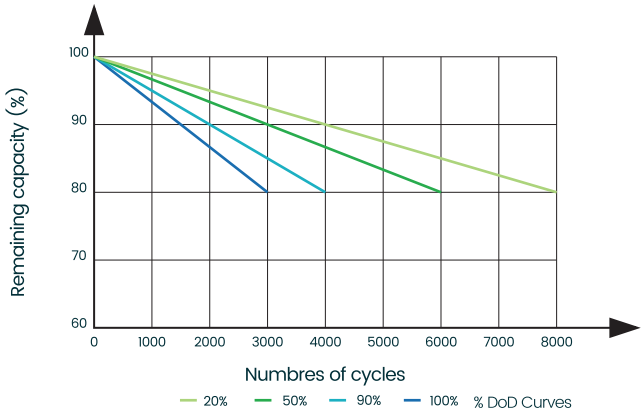

Self discharge Characteristics Curve

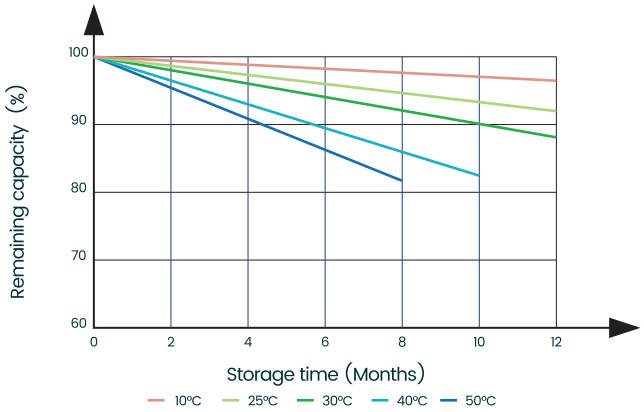

Recognized under CE/IEC and certified by ISO9001, 14001

©2024 Telperion - All rights reserved

Discharge Characteristics

Run Time (Constant Current and Power 25' C 77 ° F)

Voltage	3s	10s	10 min	30 min	45 min	1h	2h	3h	5h	8h	10h
20,0V	4980	3580	2980	2150	1494	1130	565	386	236	134	104
20,8V	4830	3460	2945	2145	1491	1126	561	383	234	133	103
21,6V	4680	3330	2886	2131	1478	1122	578	379	231	131	102
22,4V	4480	3260	2830	2128	1476	1120	575	377	219	129	101

Compared with Sealed Lead Acid batteries, LiFePO4 Deep Cycle Batteries are small and light with longer cycle life.

- LiFePO4 are a safe technology that will not catch fire or explode with overcharging, nor produce flammable gases under any circumstances.
- LiFePO4 have a higher discharge-rate capability.
- LiFePO4 batteries are the most environmentally friendly battery chemistry available today.
- LiFePO4 cells can deliver a very high discharge rate.
- LiFePO4 are 100% maintenance-free for the life of the battery.
- LiFePO4 weigh one third to one quarter of the weight of a lead-acid battery of equivalent power.
- LiFePO4 can deliver more than 3000 deep discharge cycles, compared to around 300 to 800 for ten-year design-life VRLA, or 1000 cycles to 50% depth of discharge.
- LiFePO4 have a flat voltage discharge curve, delivery little to no “voltage sag” (as with lead-acid batteries).
- LiFePO4 accept higher continuous charge rates, allowing for much shorter recharging times, compared to VRLA which have 0.1C to 0.25C recommended charge rates.
- LiFePO4 can have low self-discharge rates (unlike lead-acid which will go flat quite quickly if left sitting for long periods).
- LiFePO4 can be used in high ambient temperatures, up to 65 deg C without significant performance or service-life degradation.
- LiFePO4 are relatively maintenance-free for the life of the battery.



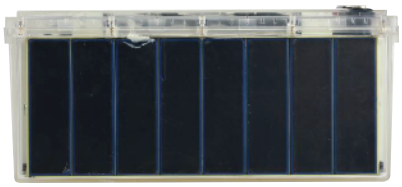

©2024 Telperion - All rights reserved