




tid 1 sinusoidal W=10mm | cut@high-kappa 0.9/0.9 mm | straight-leg ripple p95 0.0 mm | min wall clearance 4.1 mm

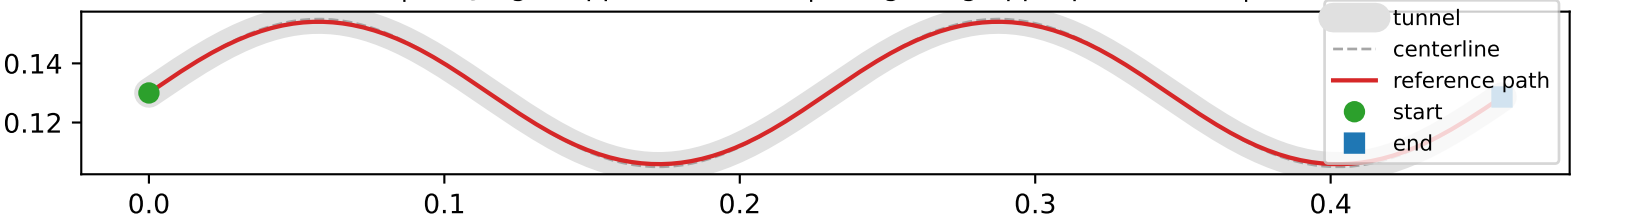


tid 2 sinusoidal W=20mm | cut@high-kappa 2.9/2.9 mm | straight-leg ripple p95 0.5 mm | min wall clearance 7.1 mm

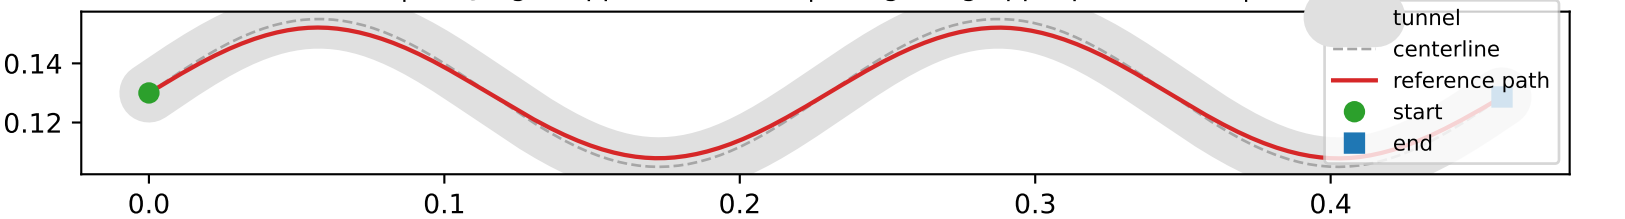


tid 3 sinusoidal W=30mm | cut@high-kappa 5.6/5.7 mm | straight-leg ripple p95 1.1 mm | min clearance 9.3 mm

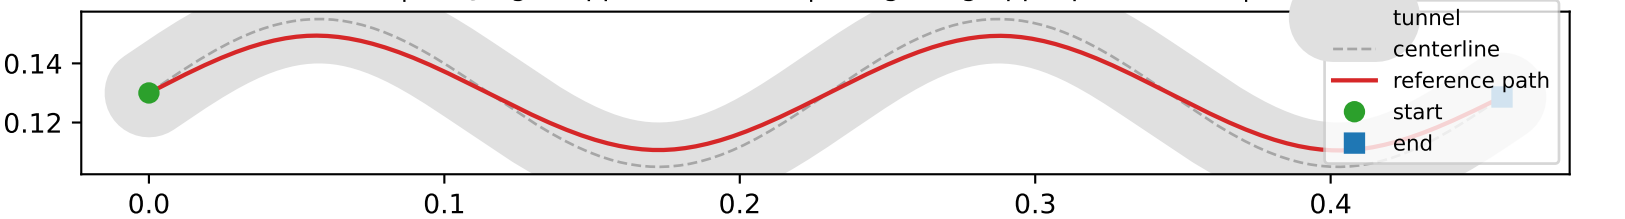


tid 4 sinusoidal W=40mm | cut@high-kappa 8.8/9.0 mm | straight-leg ripple p95 1.8 mm | mi range 11.0 mm

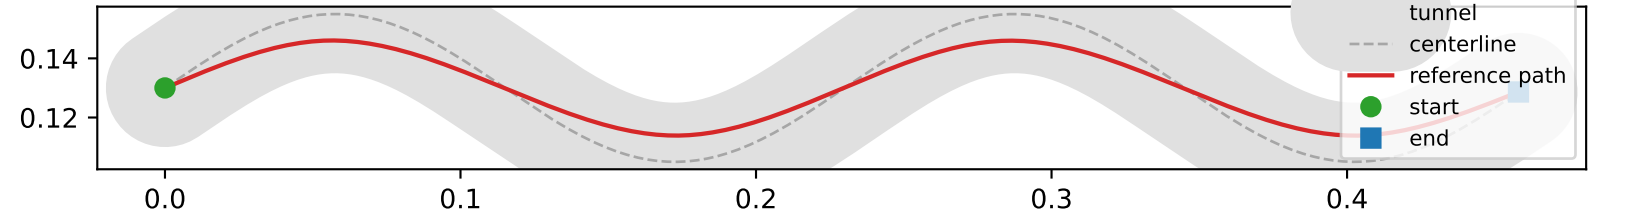


tid 5 sinusoidal W=50mm | cut@high-kappa 12.6/12.8 mm | straight-leg ripple p95 2.4 mm | range 12.1 mm

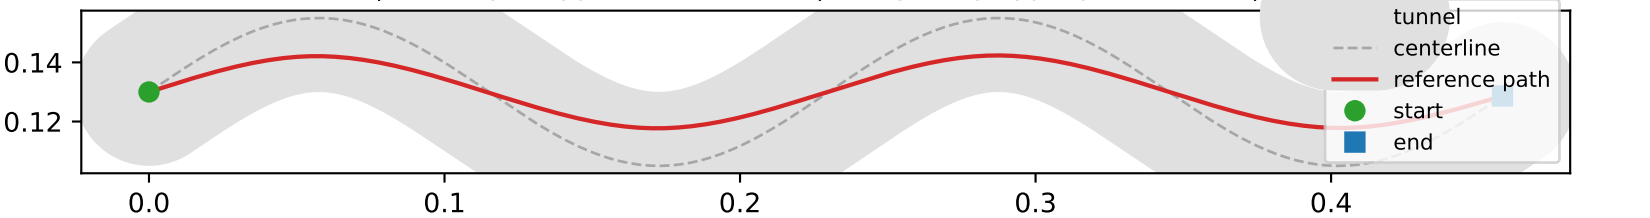


tid 6 corner W=10mm | cut@high-kappa 0.3/1.3 mm | straight-leg ripple p95 0.0 mm | min wall clearance 3.0 mm

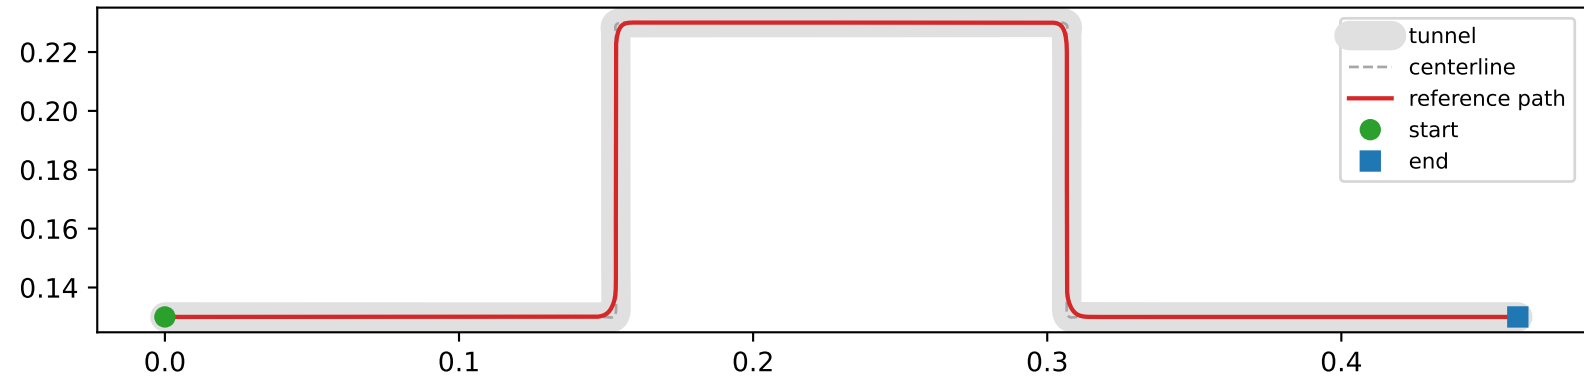


tid 7 corner W=20mm | cut@high-kappa 1.3/3.3 mm | straight-leg ripple p95 0.0 mm | min wall clearance 6.3 mm

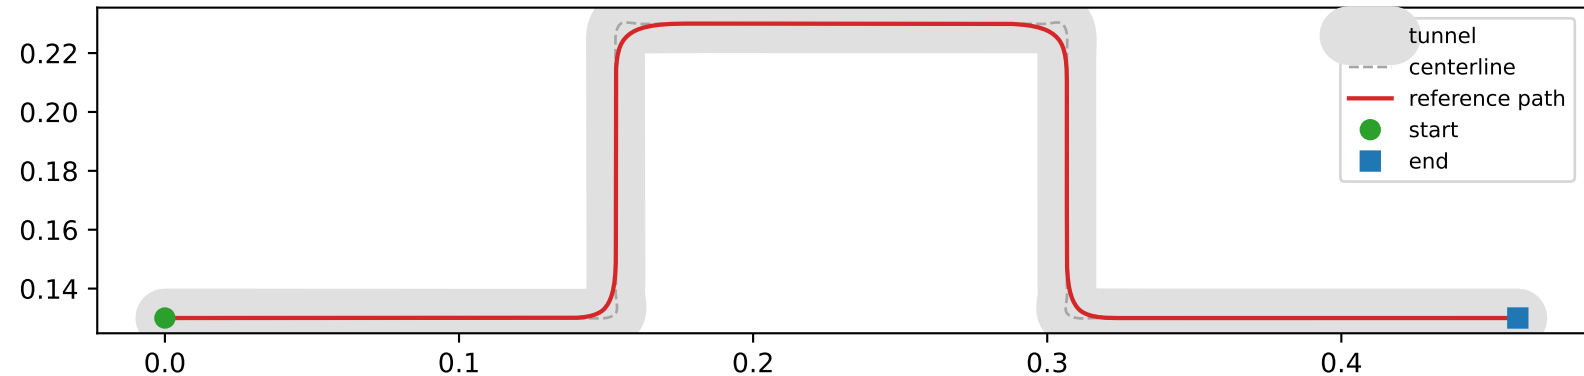


tid 8 corner W=30mm | cut@high-kappa 2.9/5.8 mm | straight-leg ripple p95 0.0 mm | min wall clearance 8.7 mm

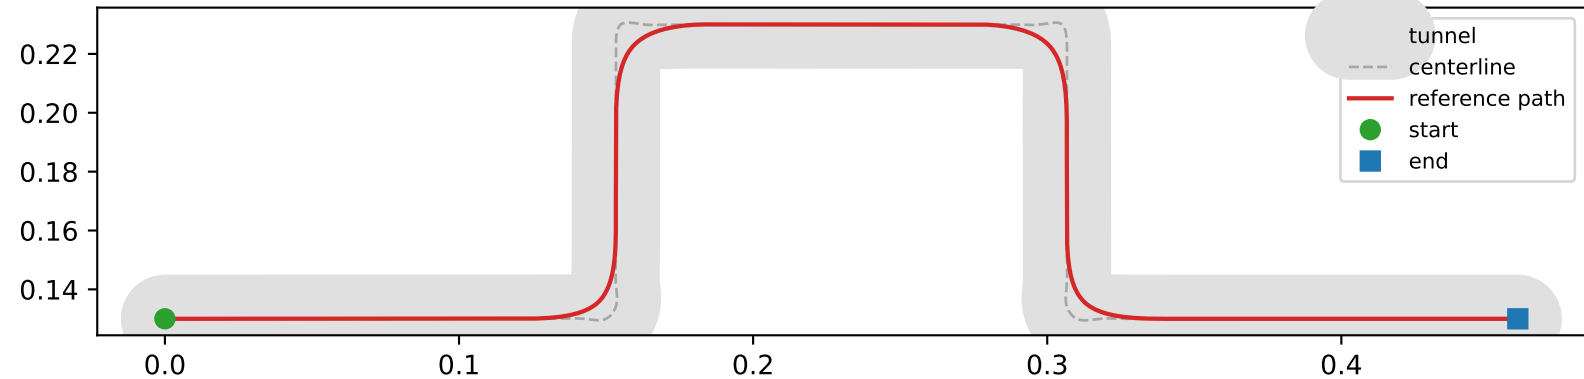

tid 9 corner W=40mm | cut@high-kappa 4.1/7.5 mm | straight-leg ripple p95 0.0 mm | min wall clearance 11.4 mm

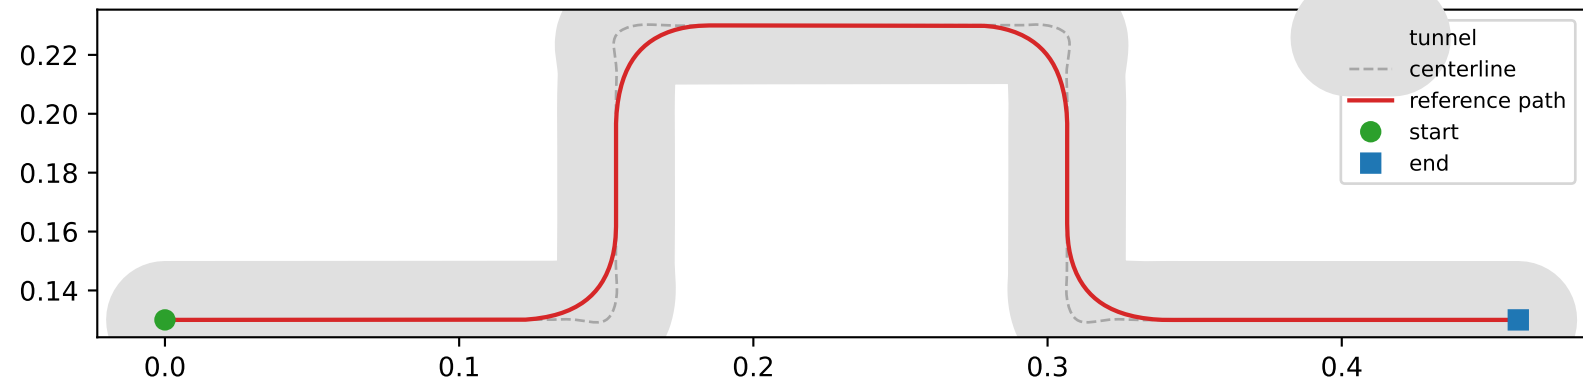

tid 10 corner W=50mm | cut@high-kappa 2.9/5.3 mm | straight-leg ripple p95 0.0 mm | min distance 16.5 mm

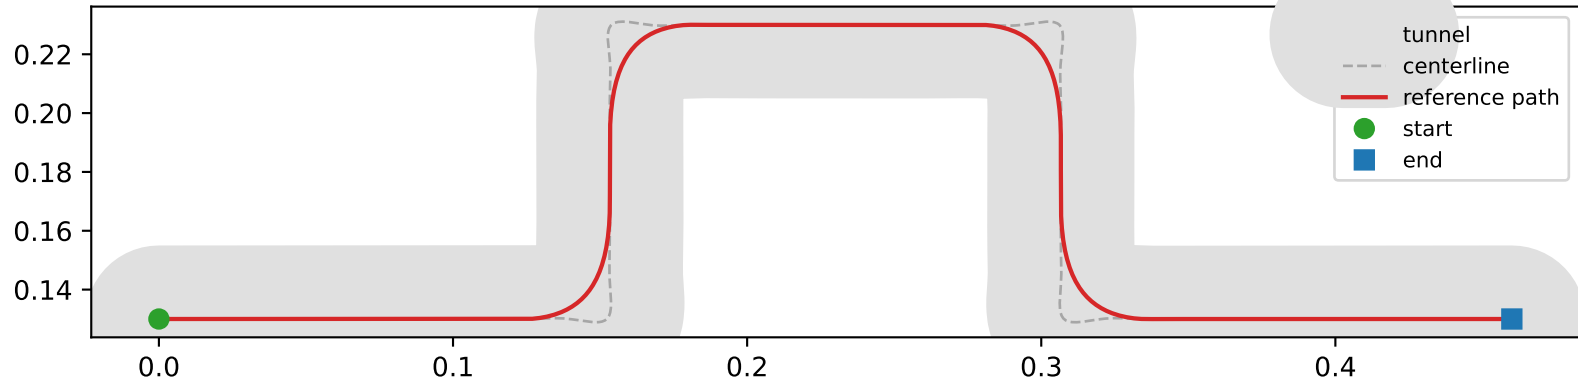

tid 11 straight W=10mm | cut@high-kappa 0.0/0.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 5.0 mm

$1e-6 + 1.30001e-1$

-0


0.0

0.1

0.2


0.3

0



tid 12 straight W=20mm | cut@high-kappa 0.0/0.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 10.0 mm

$1e-6 + 1.30001e-1$

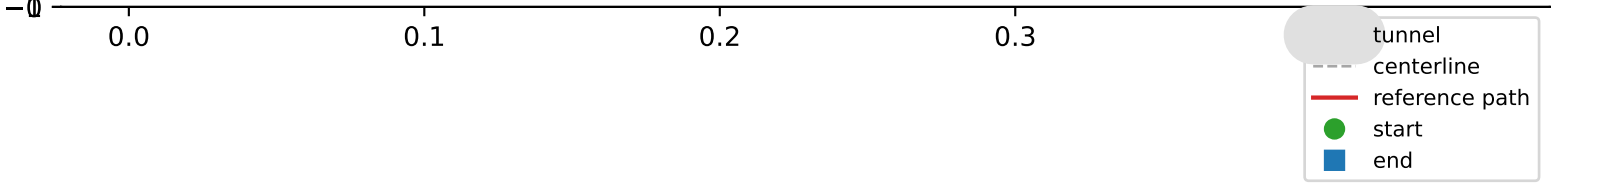

tid 13 straight W=30mm | cut@high-kappa 0.0/0.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 15.0 mm

$1e-6 + 1.30001e-1$

0

0.0


0.1

0.2

0.3

- tunnel
- centerline
- reference path
- start
- end

tid 14 straight W=40mm | cut@high-kappa 0.0/0.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 20.0 mm

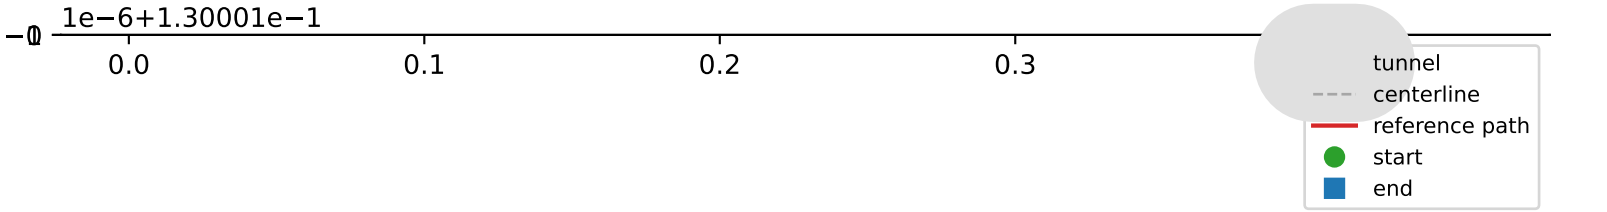

tid 15 straight W=50mm | cut@high-kappa 0.0/0.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 25.0 mm

$1e-6 + 1.30001e-1$




0.0

0.1


0.2


0.3





tunnel  
centerline  
reference path  
start  
end


tid 26 gentle\_sinusoidal W=10mm | cut@high-kappa 0.5/0.6 mm | straight-leg ripple p95 0.1 mm | mirror wall clearance 4.4 mm

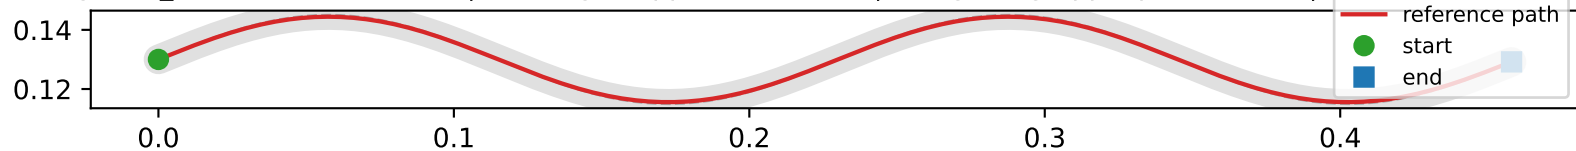

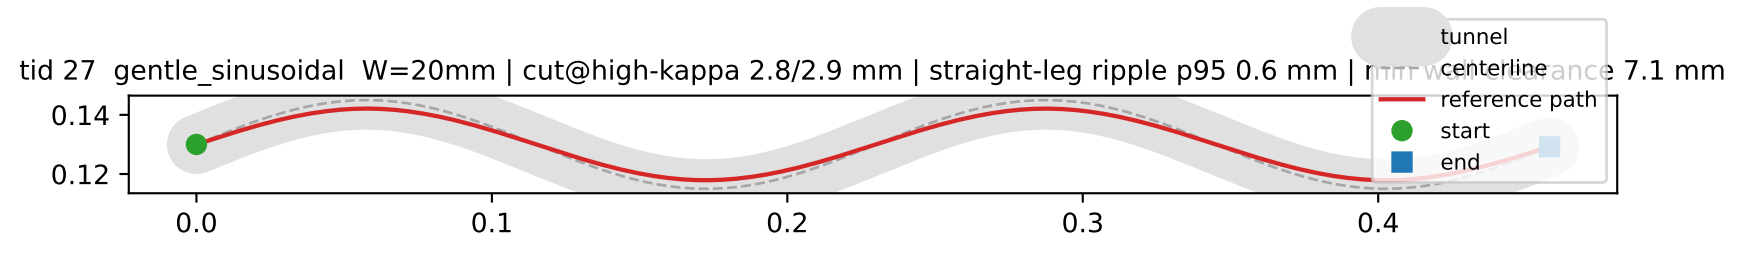


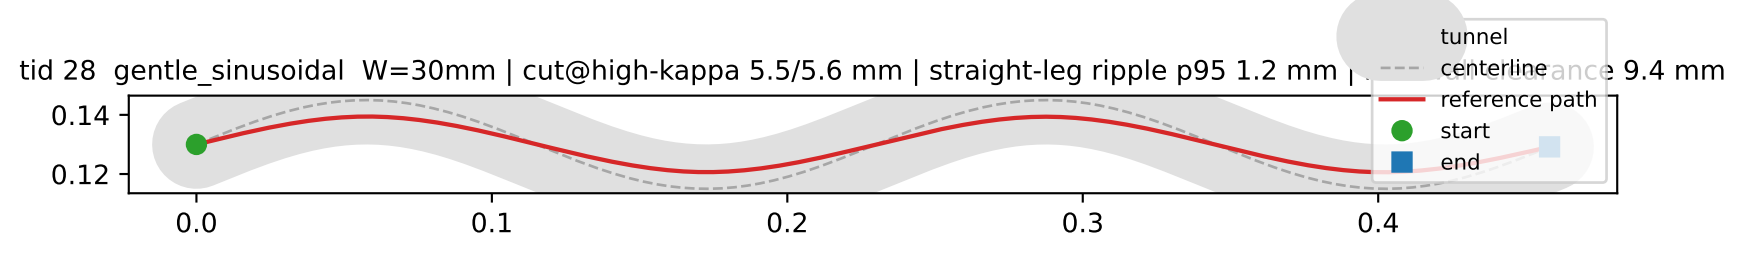

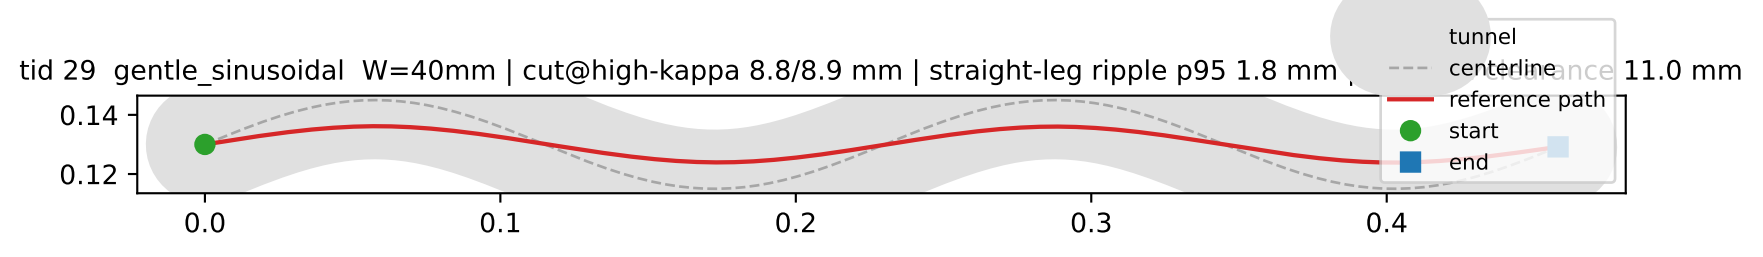


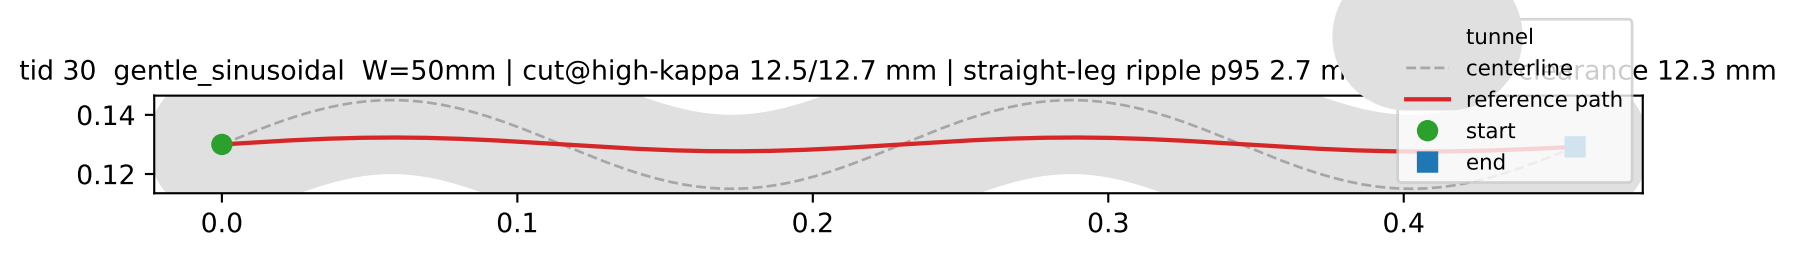


tid 31 sharp\_sinusoidal W=10mm | cut@high-kappa 0.9/0.9 mm | straight-leg ripple p95 0.0 mm | min wall clearance 4.1 mm

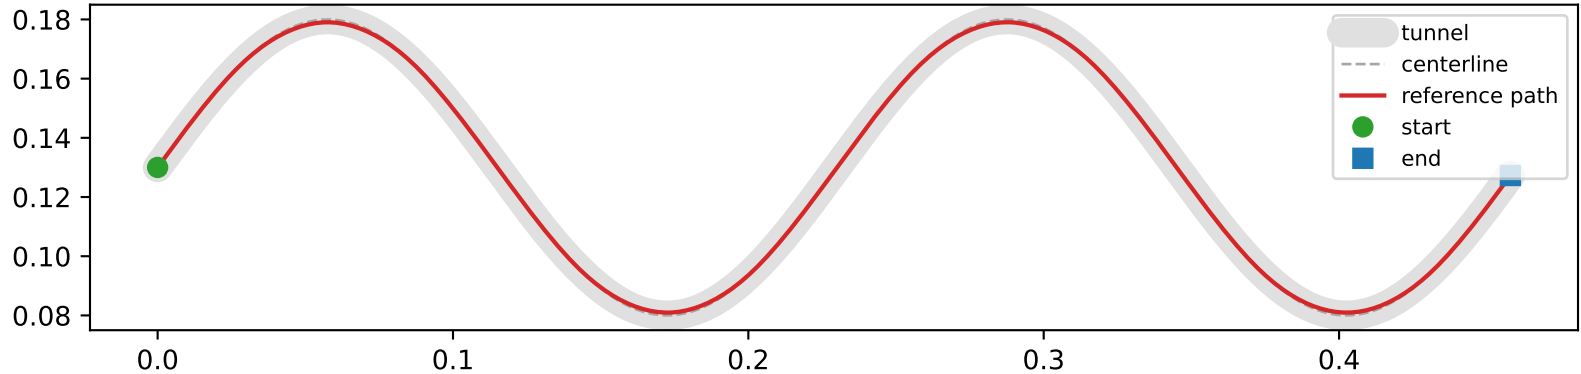


tid 32 sharp\_sinusoidal W=20mm | cut@high-kappa 2.8/2.9 mm | straight-leg ripple p95 0.0 mm | min wall clearance 7.0 mm

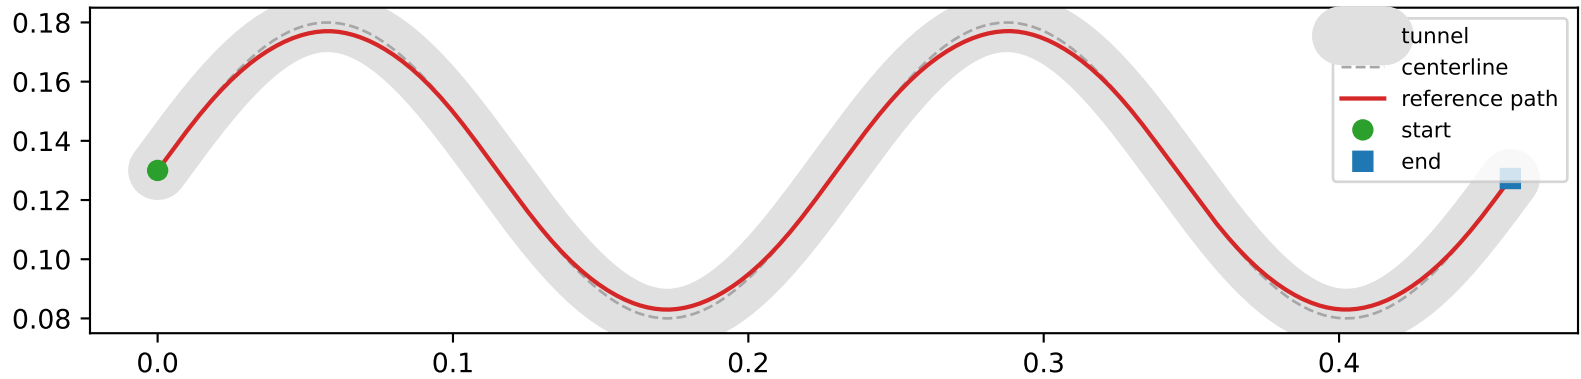

tid 33 sharp\_sinusoidal W=30mm | cut@high-kappa 5.6/5.8 mm | straight-leg ripple p95 0.6 mm | min wall clearance 9.2 mm

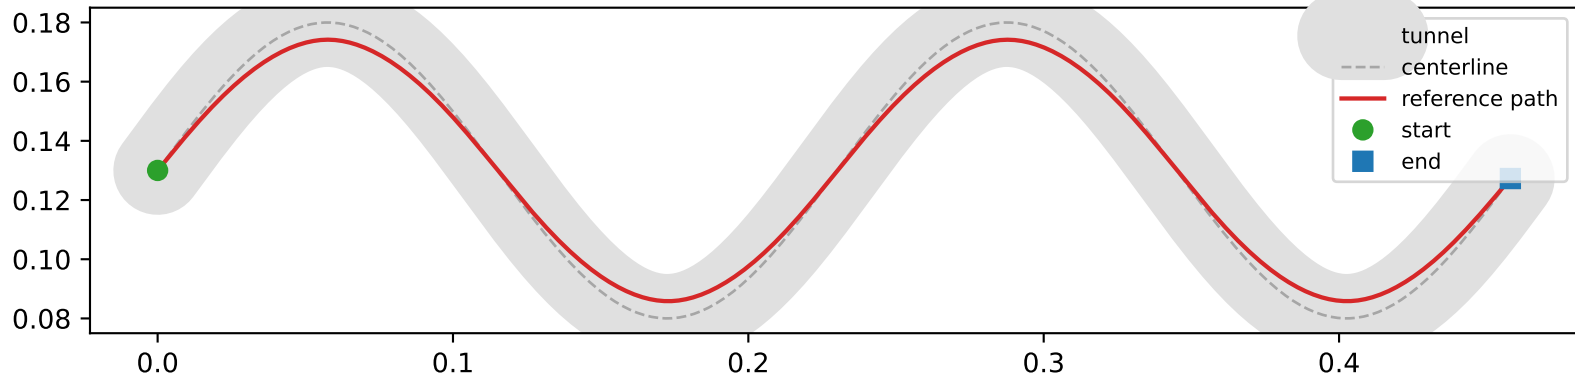

tid 34 sharp\_sinusoidal W=40mm | cut@high-kappa 8.9/9.2 mm | straight-leg ripple p95 1.3 mm | ripple clearance 10.7 mm

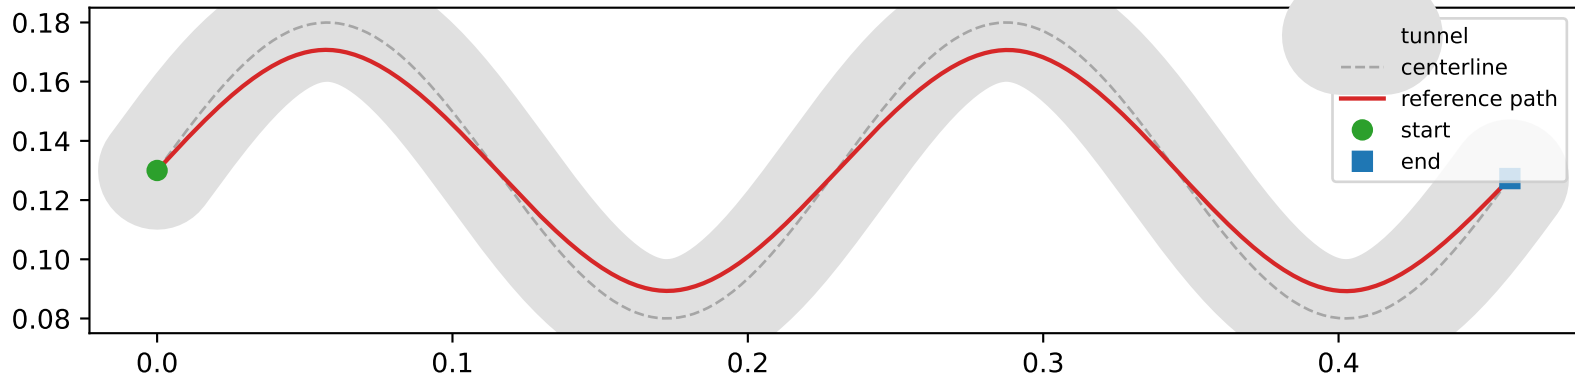

tid 35 sharp\_sinusoidal W=50mm | cut@high-kappa 12.6/13.2 mm | straight-leg ripple p95 1.8 mm | clearance 11.7 mm

