




tid 1 sinusoidal W=10mm | cut@high-kappa 0.3/0.3 mm | straight-leg ripple p95 0.1 mm | min wall clearance 4.7 mm

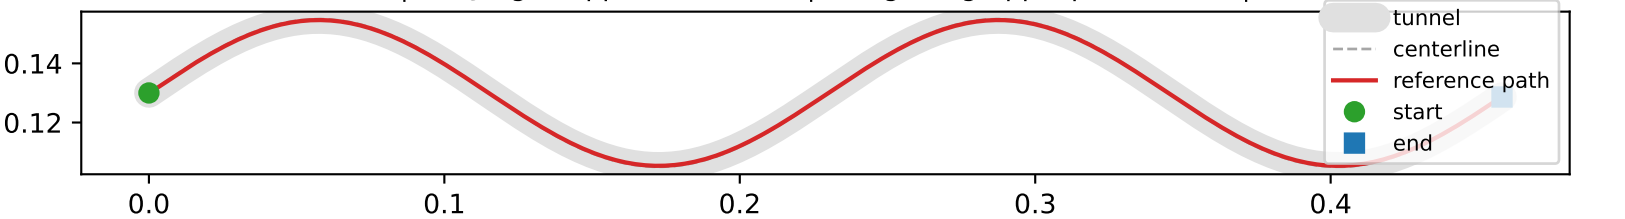


tid 2 sinusoidal W=20mm | cut@high-kappa 1.3/1.3 mm | straight-leg ripple p95 0.6 mm | min wall clearance 8.7 mm

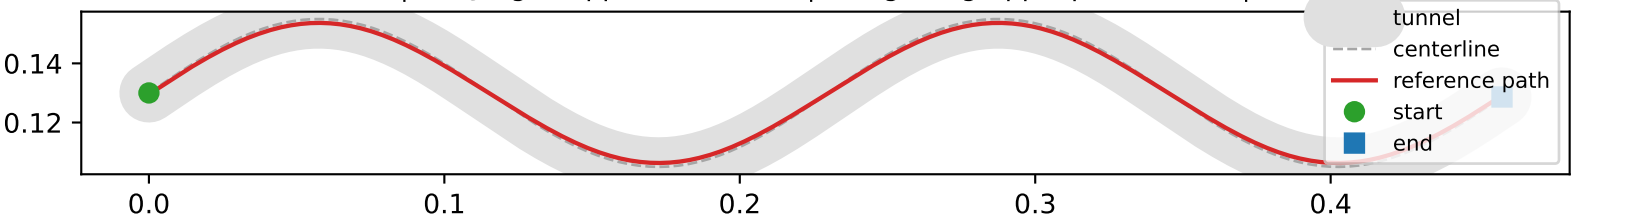


tid 3 sinusoidal W=30mm | cut@high-kappa 2.8/2.8 mm | straight-leg ripple p95 1.4 mm | min clearance 12.2 mm

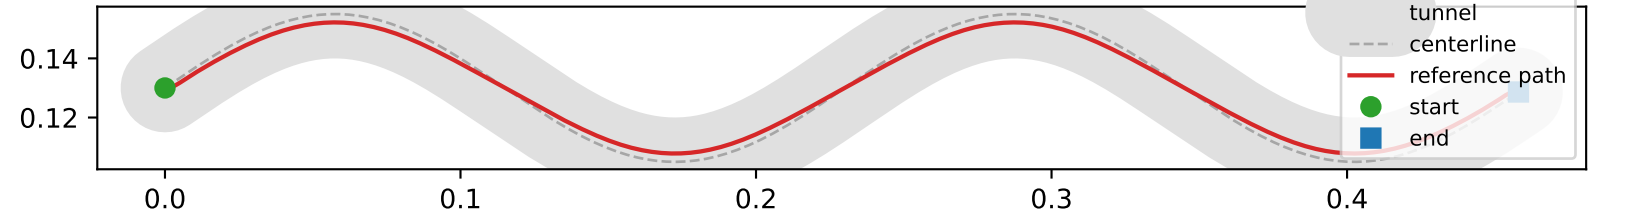


tid 4 sinusoidal W=40mm | cut@high-kappa 4.6/4.6 mm | straight-leg ripple p95 3.4 mm | mi range 15.4 mm

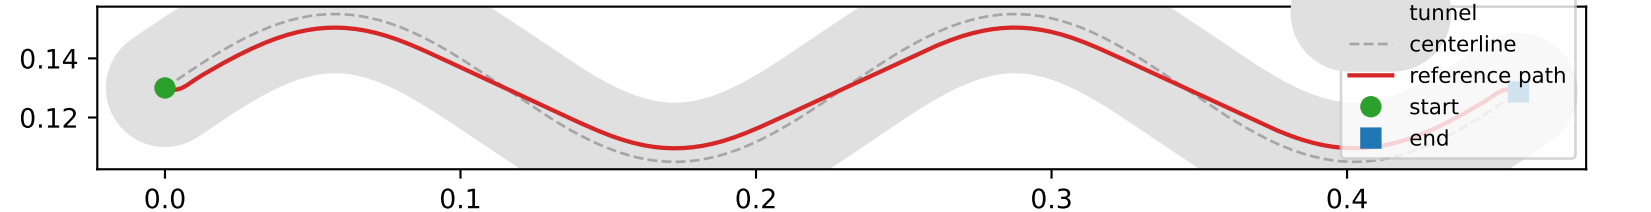


tid 5 sinusoidal W=50mm | cut@high-kappa 6.9/7.0 mm | straight-leg ripple p95 6.6 mm | m distance 17.6 mm

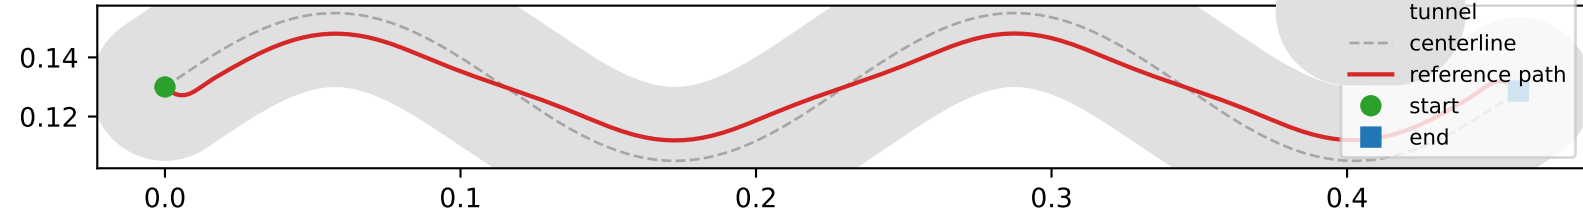


tid 6 corner W=10mm | cut@high-kappa 0.1/0.2 mm | straight-leg ripple p95 0.0 mm | min wall clearance 4.7 mm

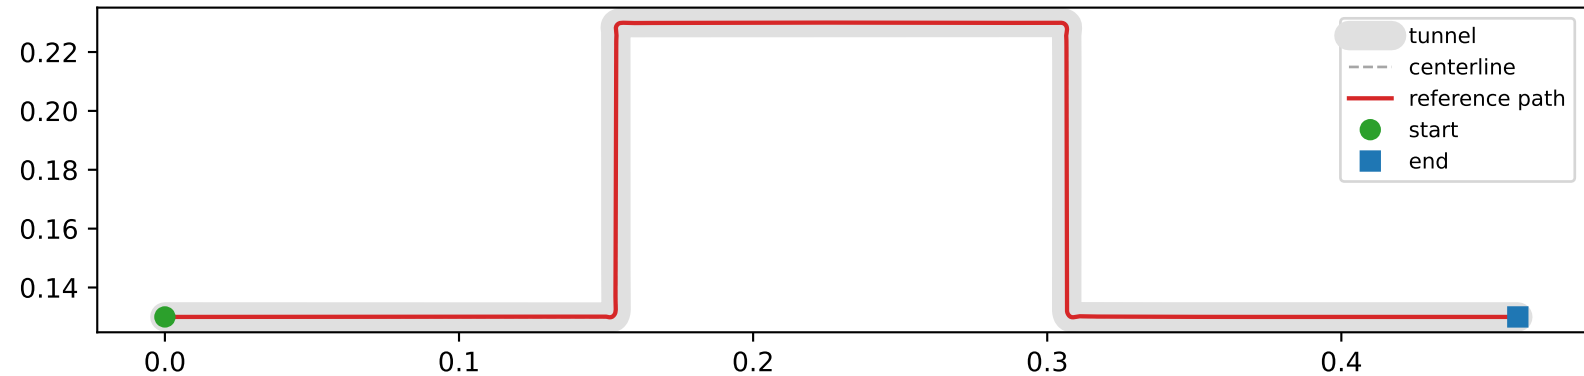


tid 7 corner W=20mm | cut@high-kappa 0.5/0.5 mm | straight-leg ripple p95 0.0 mm | min wall clearance 9.5 mm

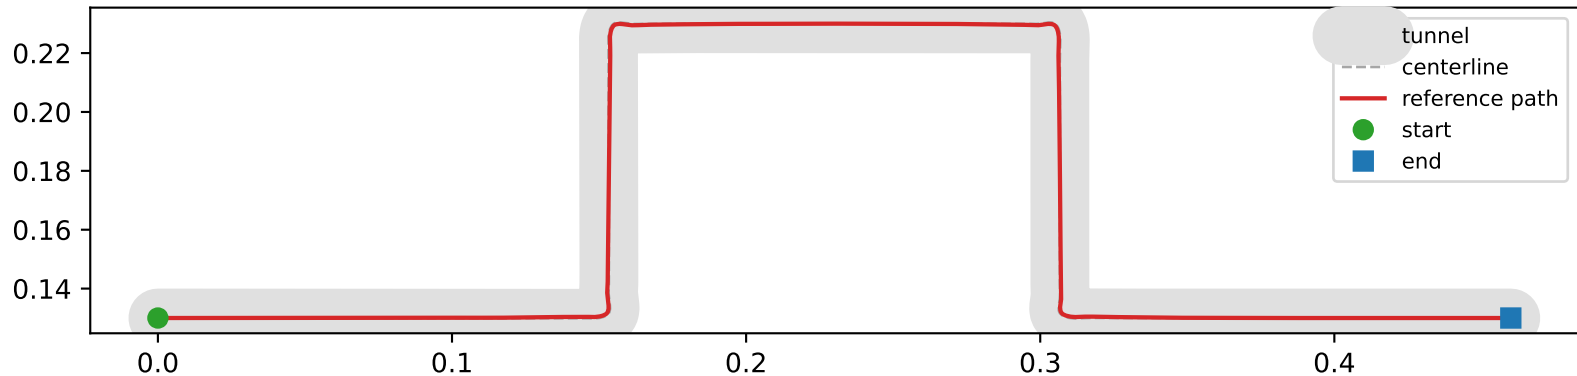


tid 8 corner W=30mm | cut@high-kappa 0.9/1.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 13.9 mm

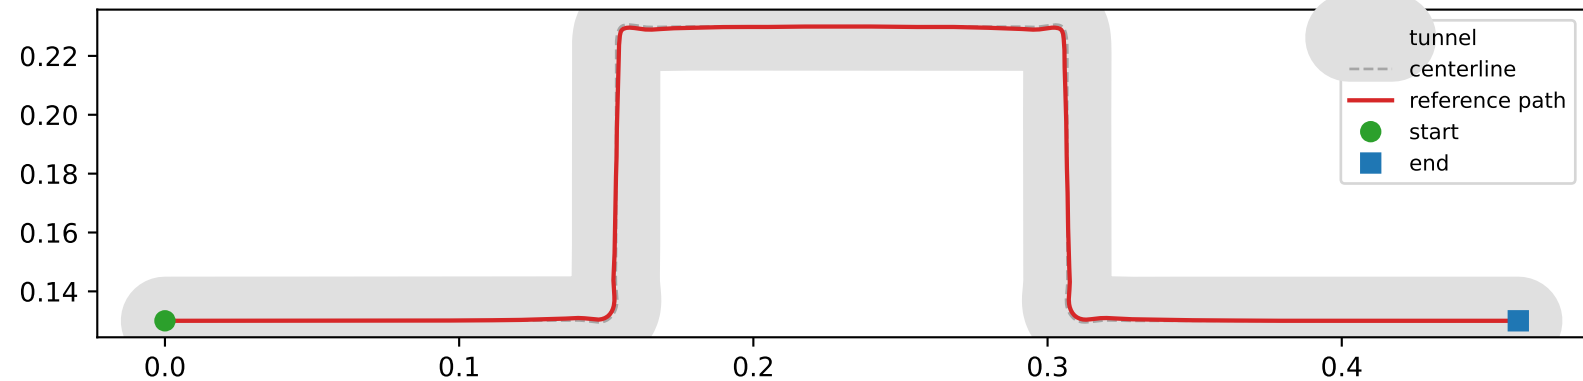


tid 9 corner W=40mm | cut@high-kappa 1.9/2.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 17.8 mm

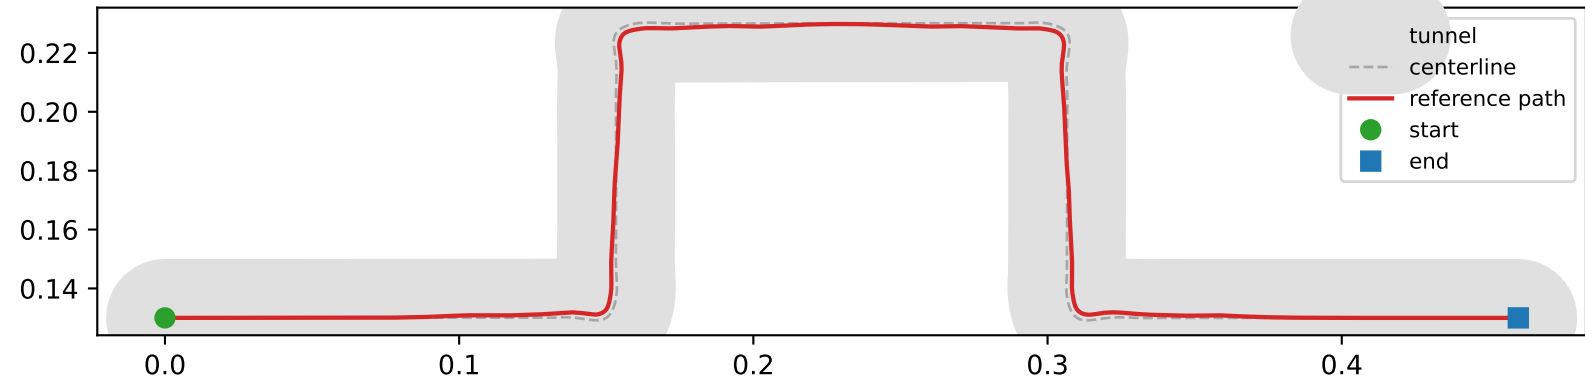

tid 10 corner W=50mm | cut@high-kappa 2.5/2.7 mm | straight-leg ripple p95 0.1 mm | min distance 22.2 mm

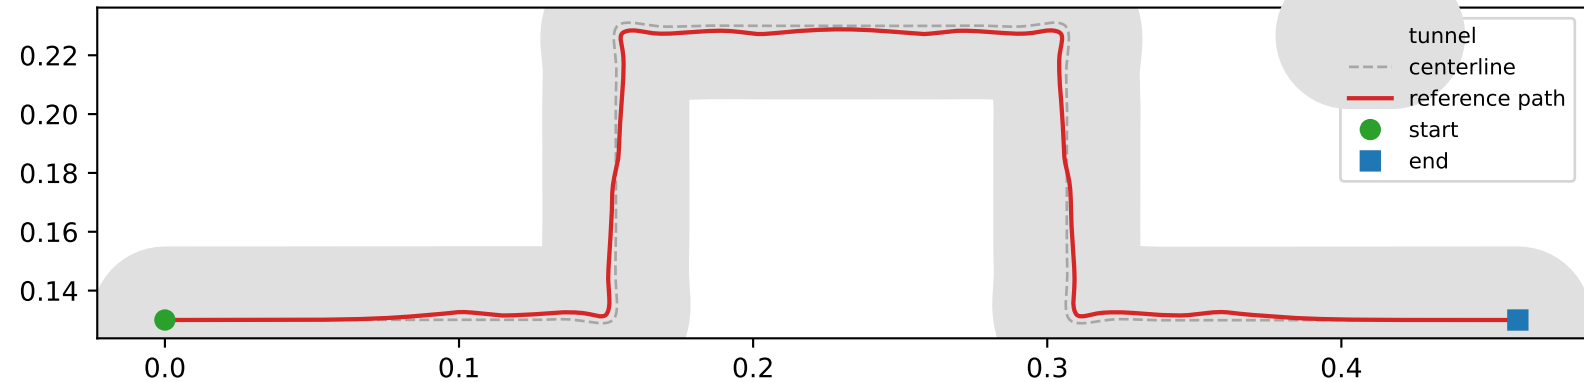


tid 11 straight W=10mm | cut@high-kappa 0.0/0.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 5.0 mm

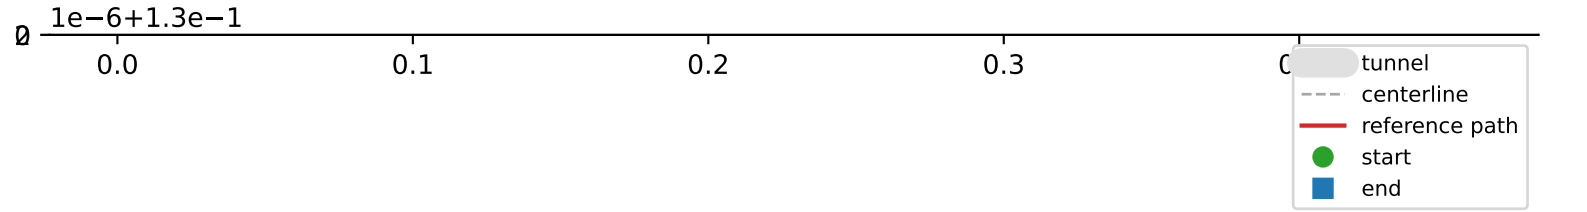

tid 12 straight W=20mm | cut@high-kappa 0.0/0.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 10.0 mm

$1e-6 + 1.30001e-1$

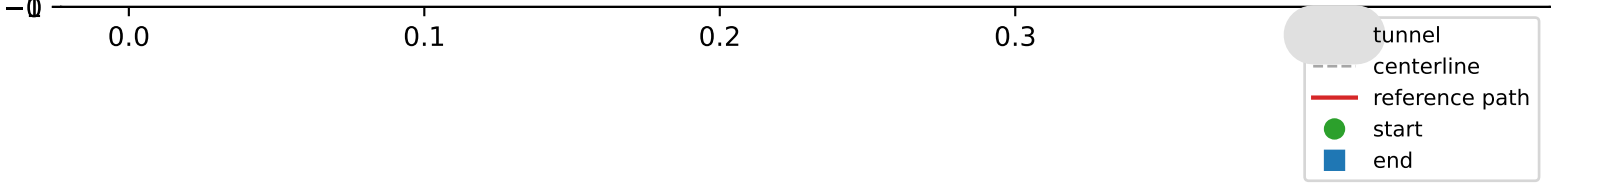

tid 13 straight W=30mm | cut@high-kappa 0.0/0.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 15.0 mm

$1e-6 + 1.30001e-1$

0

0.0


0.1

0.2

0.3

- tunnel
- centerline
- reference path
- start
- end

tid 14 straight W=40mm | cut@high-kappa 0.0/0.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 20.0 mm

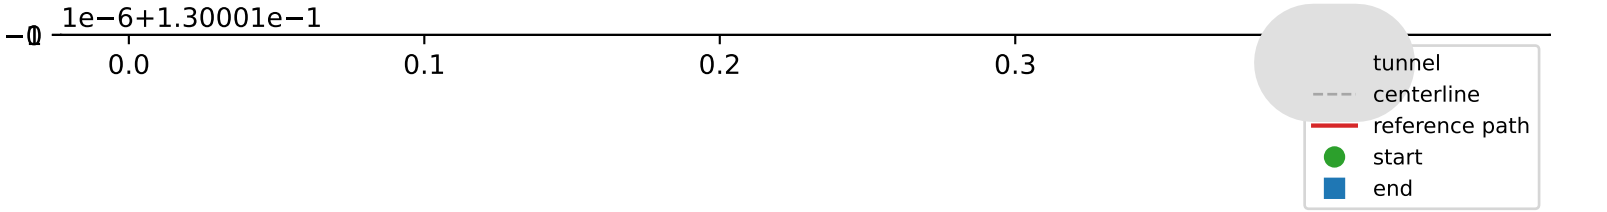

tid 15 straight W=50mm | cut@high-kappa 0.0/0.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 25.0 mm


0 $1e-6+1.3e-1$

0.0

0.1


0.2

0.3





-  tunnel
-  centerline
-  reference path
-  start
-  end


tid 26 gentle_sinusoidal W=10mm | cut@high-kappa 0.5/0.5 mm | straight-leg ripple p95 0.2 mm | mirror wall clearance 4.5 mm

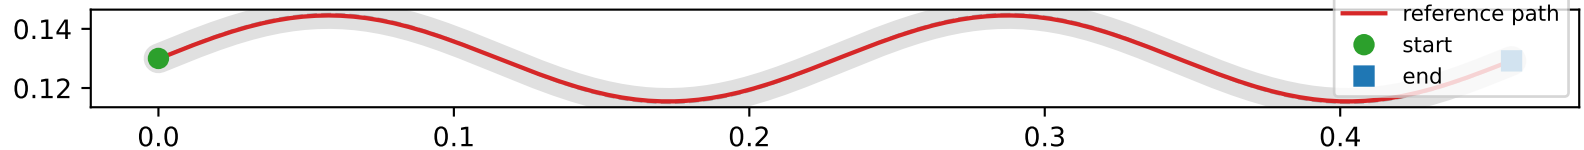


tid 27 gentle_sinusoidal W=20mm | cut@high-kappa 1.8/1.8 mm | straight-leg ripple p95 0.8 mm | minntr wall clearance 8.2 mm

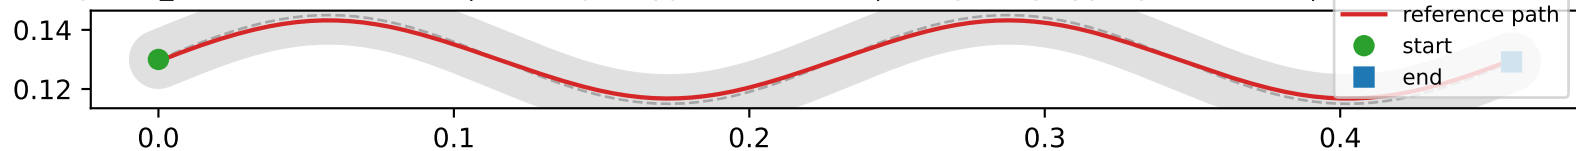


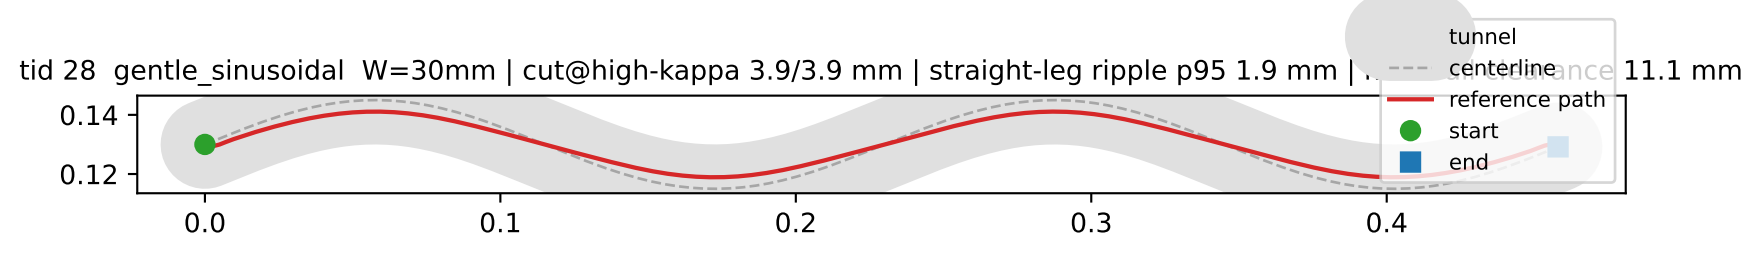

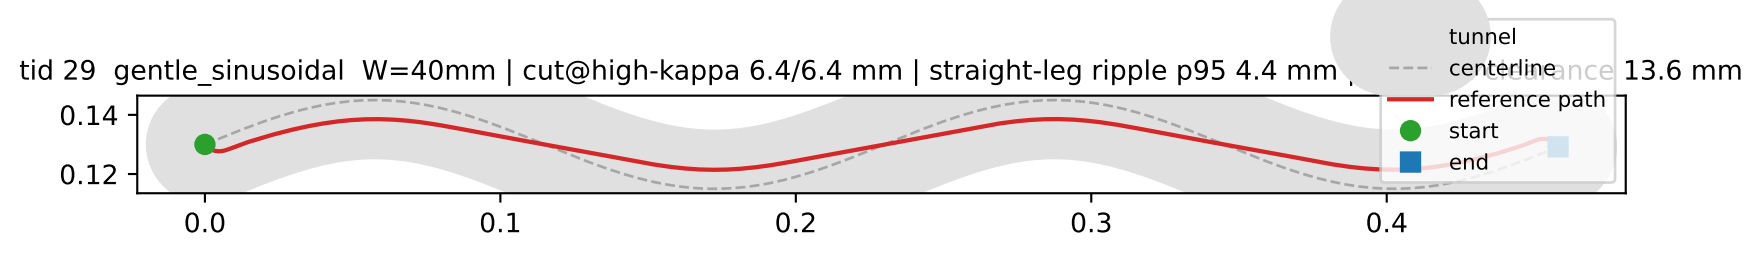


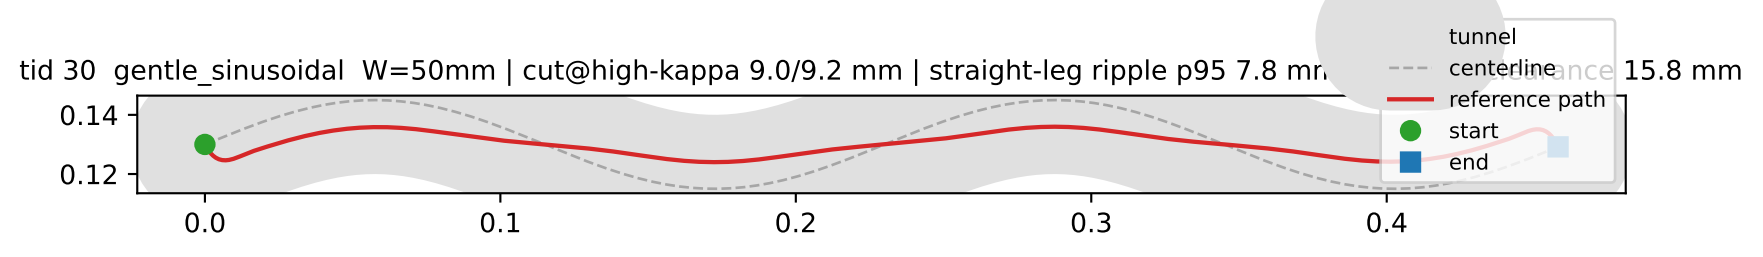


tid 31 sharp_sinusoidal W=10mm | cut@high-kappa 0.2/0.2 mm | straight-leg ripple p95 0.1 mm | min wall clearance 4.8 mm

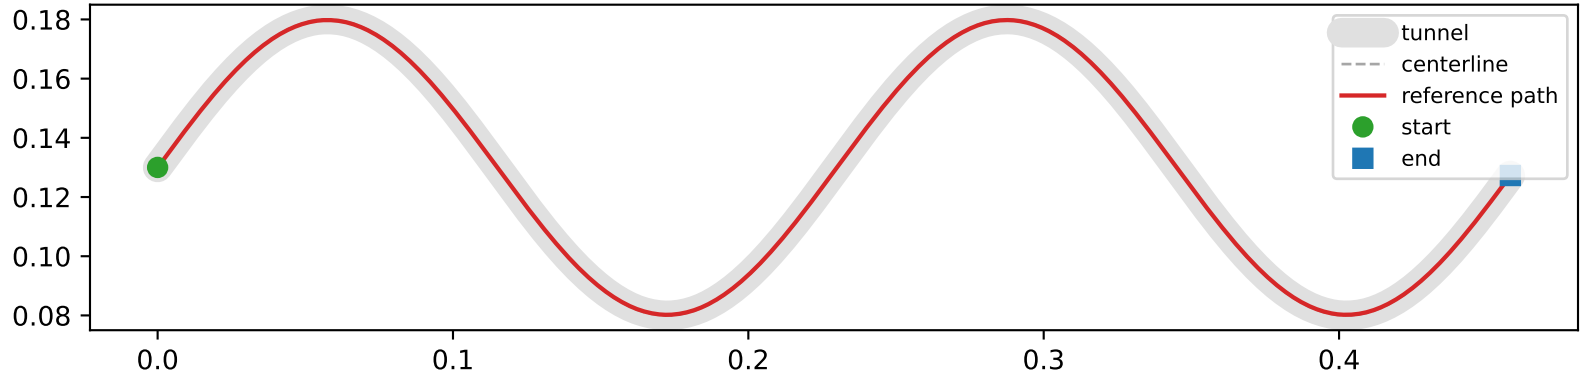


tid 32 sharp_sinusoidal W=20mm | cut@high-kappa 0.7/0.7 mm | straight-leg ripple p95 0.3 mm | min wall clearance 9.3 mm

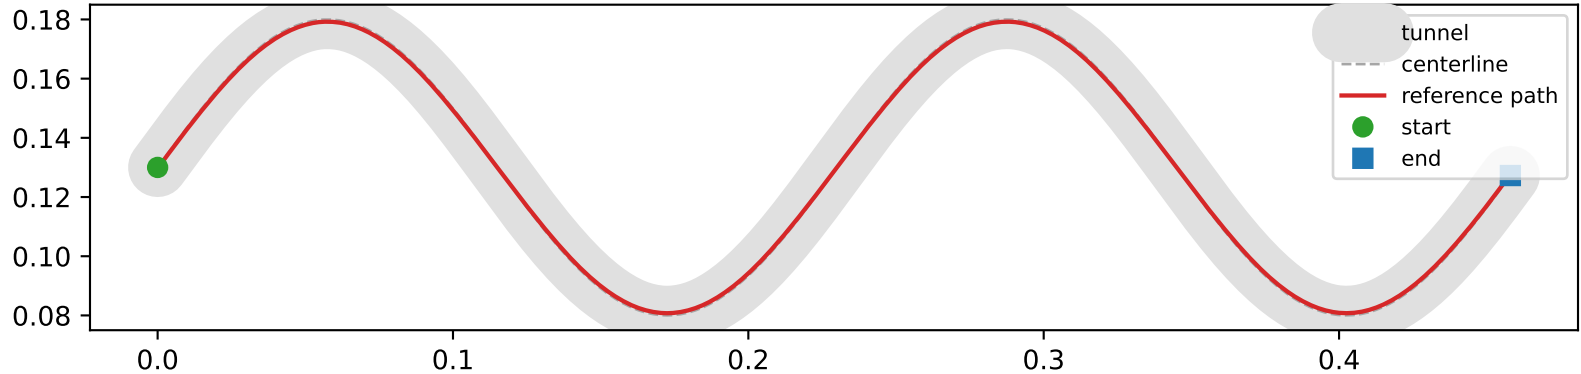

tid 33 sharp_sinusoidal W=30mm | cut@high-kappa 1.6/1.6 mm | straight-leg ripple p95 0.6 mm | min wall clearance 13.4 mm

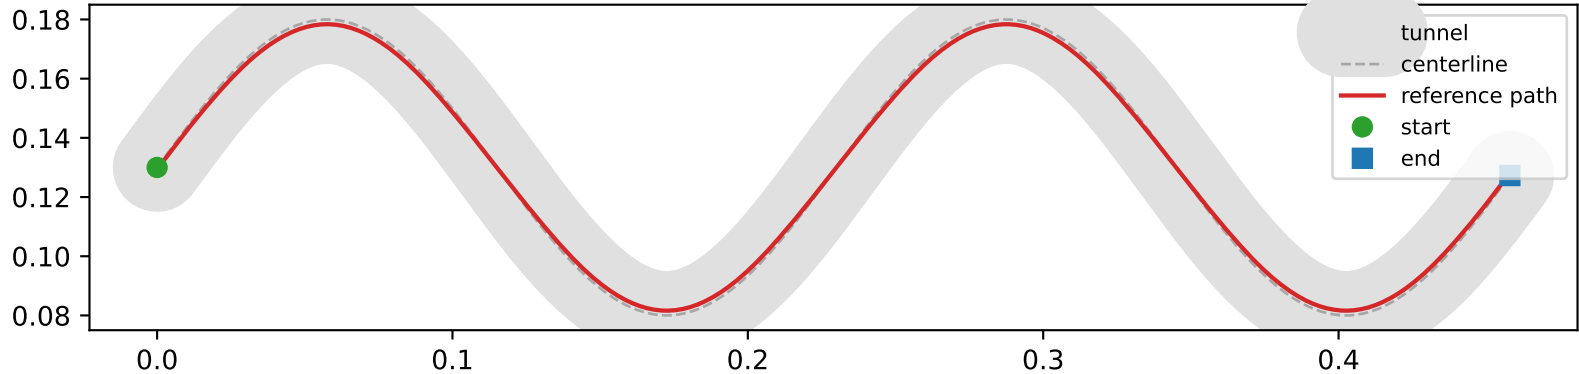

tid 34 sharp_sinusoidal W=40mm | cut@high-kappa 2.6/2.7 mm | straight-leg ripple p95 1.5 mm | ripple clearance 17.3 mm

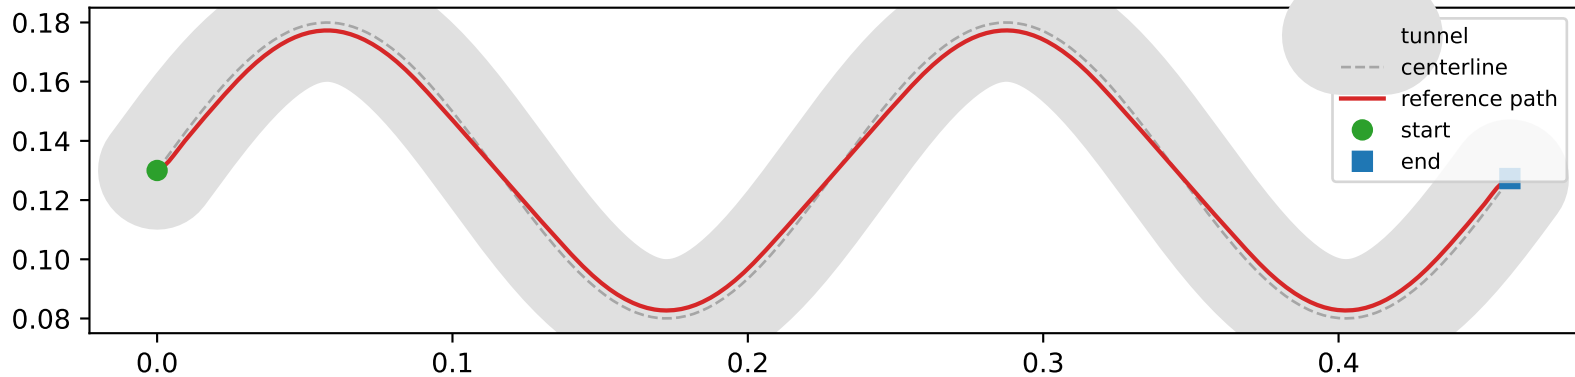

tid 35 sharp_sinusoidal W=50mm | cut@high-kappa 3.7/3.7 mm | straight-leg ripple p95 3.2 mm | clearance 21.1 mm

