




tid 1 sinusoidal W=10mm | cut@high-kappa 1.0/1.1 mm | straight-leg ripple p95 0.4 mm | min wall clearance 3.9 mm

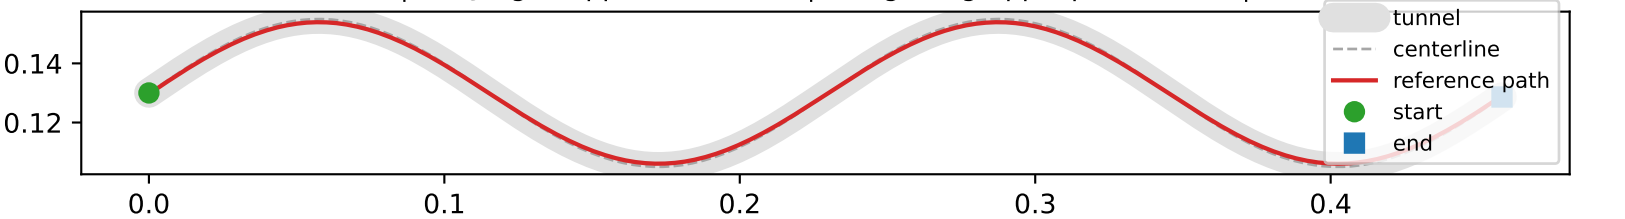


tid 2 sinusoidal W=20mm | cut@high-kappa 2.7/2.7 mm | straight-leg ripple p95 0.9 mm | min wall clearance 7.3 mm

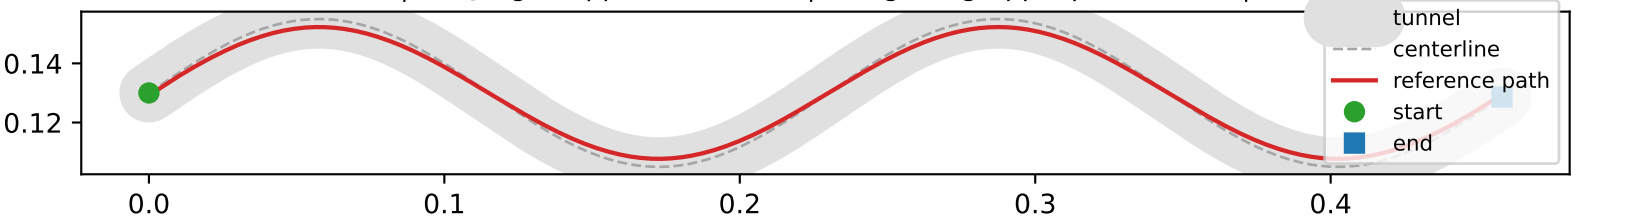


tid 3 sinusoidal W=30mm | cut@high-kappa 4.2/4.2 mm | straight-leg ripple p95 1.6 mm | min clearance 10.8 mm

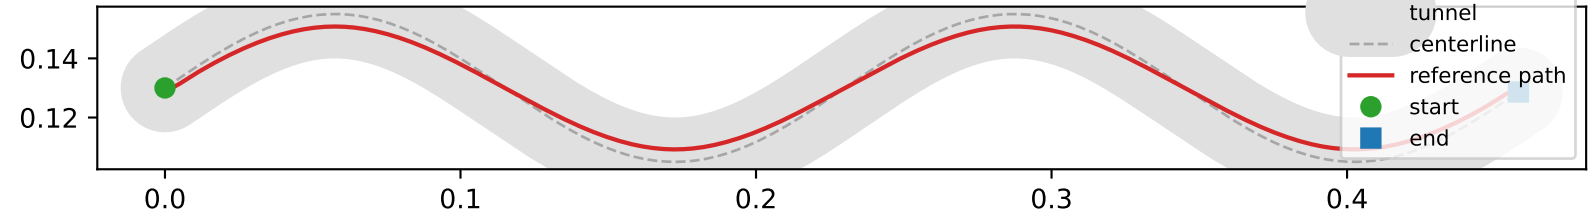


tid 4 sinusoidal W=40mm | cut@high-kappa 5.6/5.6 mm | straight-leg ripple p95 3.2 mm | mi range 14.4 mm

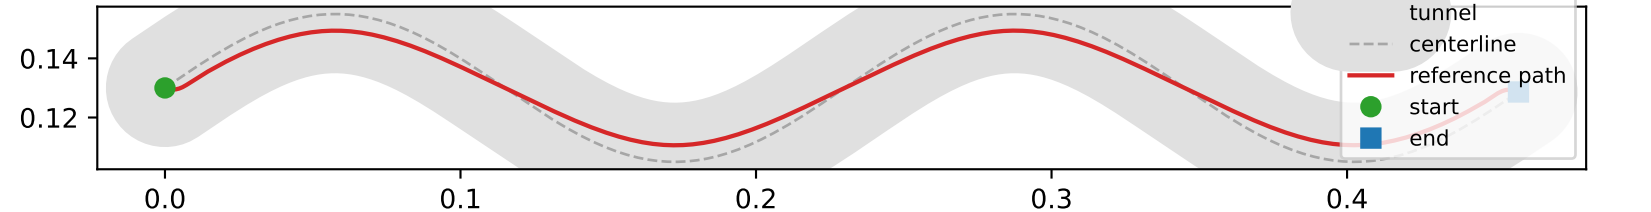


tid 5 sinusoidal W=50mm | cut@high-kappa 7.0/7.0 mm | straight-leg ripple p95 5.4 mm | m distance 18.0 mm

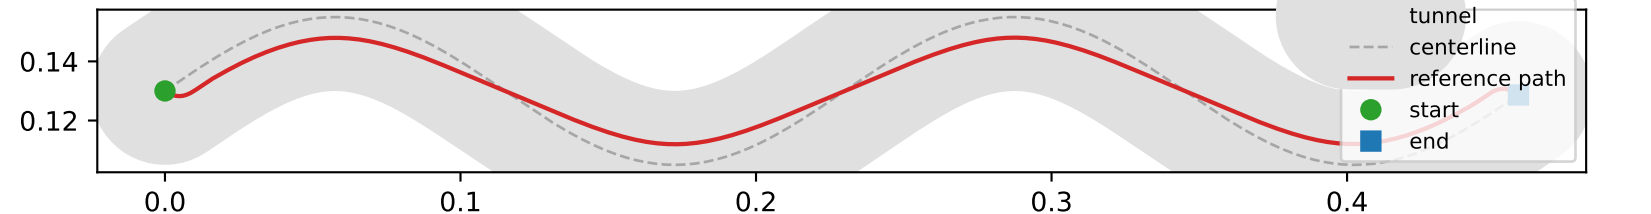


tid 6 corner W=10mm | cut@high-kappa 0.6/0.7 mm | straight-leg ripple p95 0.0 mm | min wall clearance 4.2 mm

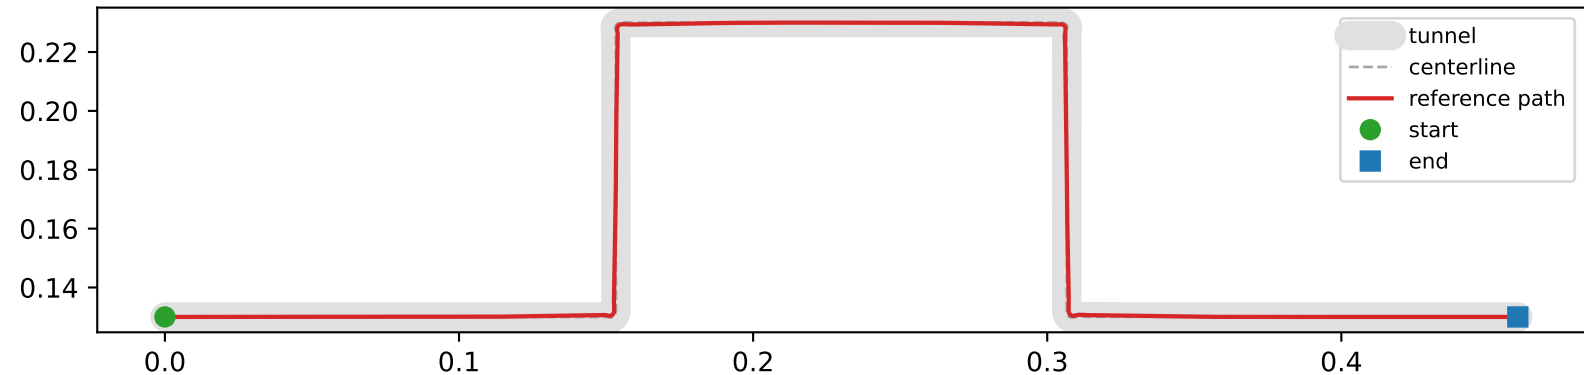


tid 7 corner W=20mm | cut@high-kappa 1.4/1.5 mm | straight-leg ripple p95 0.0 mm | min wall clearance 8.4 mm

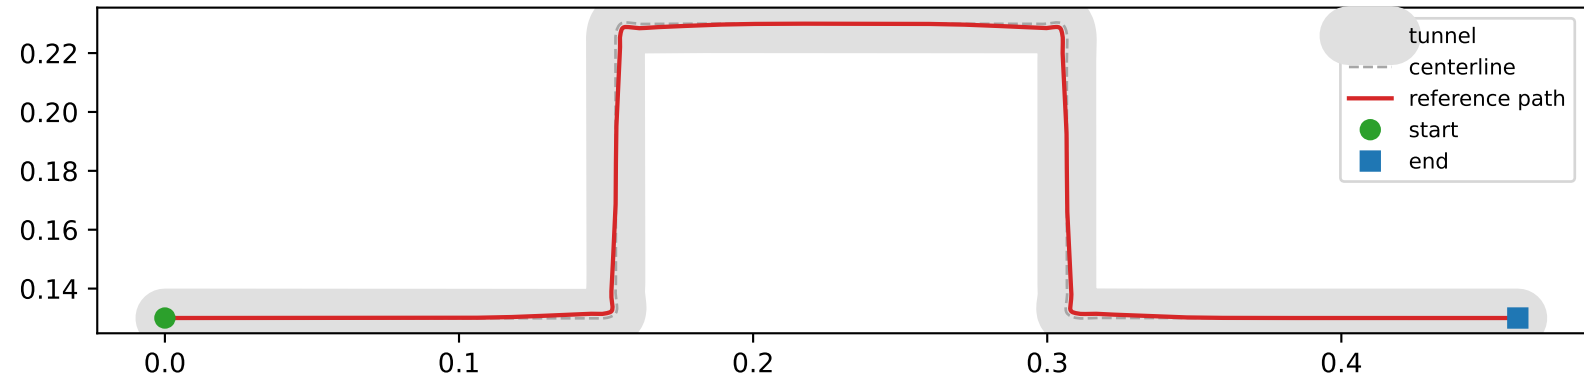


tid 8 corner W=30mm | cut@high-kappa 2.1/2.3 mm | straight-leg ripple p95 0.0 mm | min wall clearance 12.6 mm

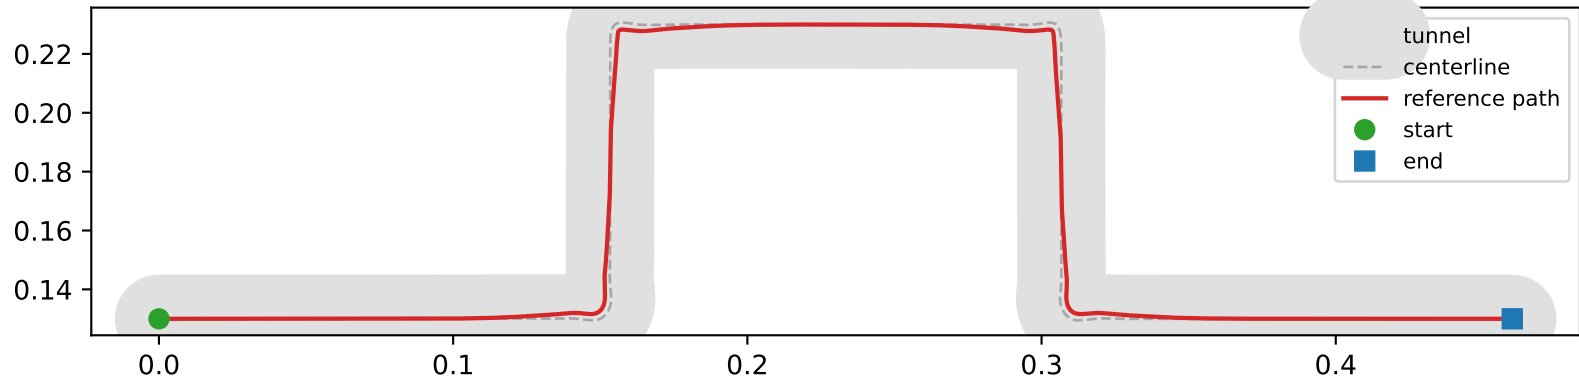


tid 9 corner W=40mm | cut@high-kappa 3.2/3.5 mm | straight-leg ripple p95 0.0 mm | min wall clearance 16.4 mm

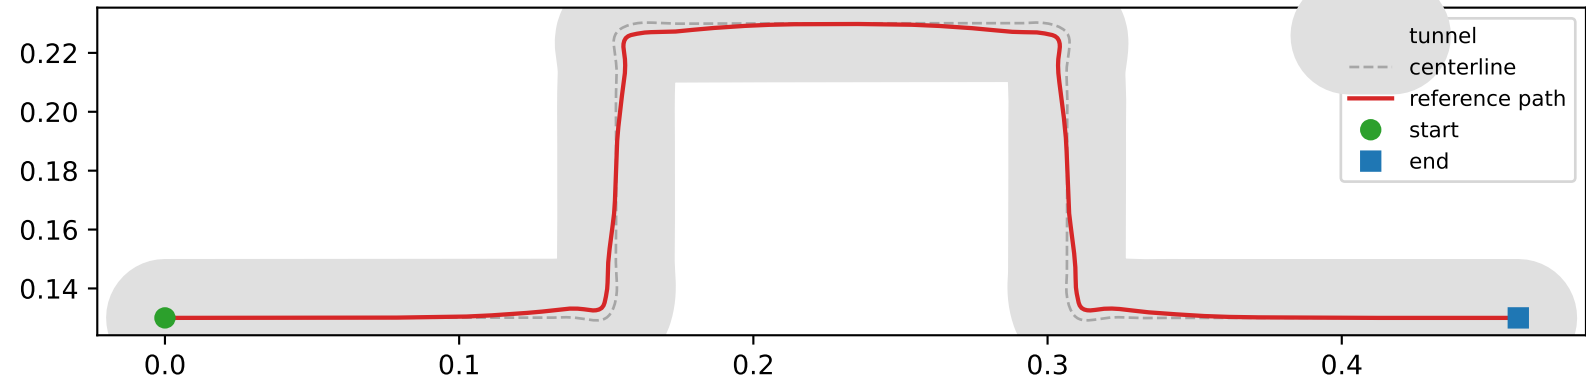

tid 10 corner W=50mm | cut@high-kappa 3.8/4.2 mm | straight-leg ripple p95 0.0 mm | min distance 20.7 mm

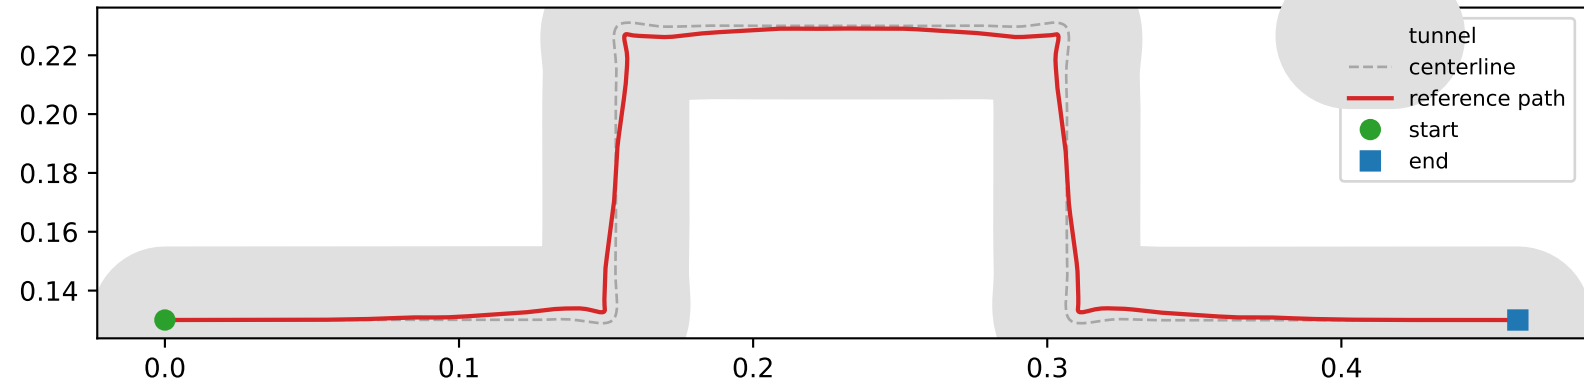


tid 11 straight W=10mm | cut@high-kappa 0.0/0.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 5.0 mm

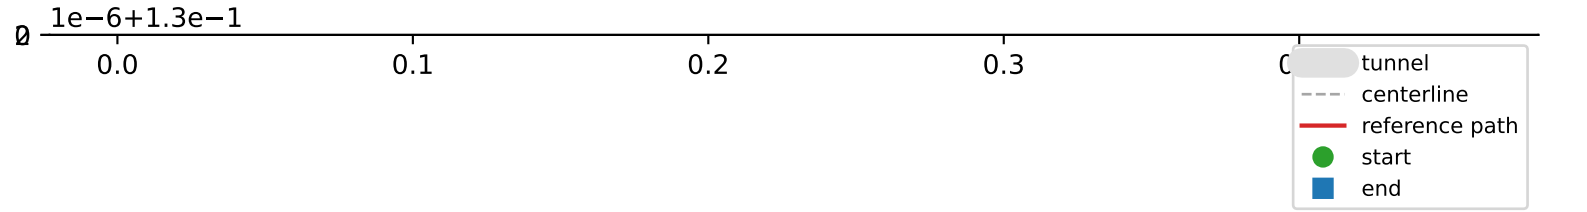

tid 12 straight W=20mm | cut@high-kappa 0.0/0.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 10.0 mm

$1e-6 + 1.30001e-1$

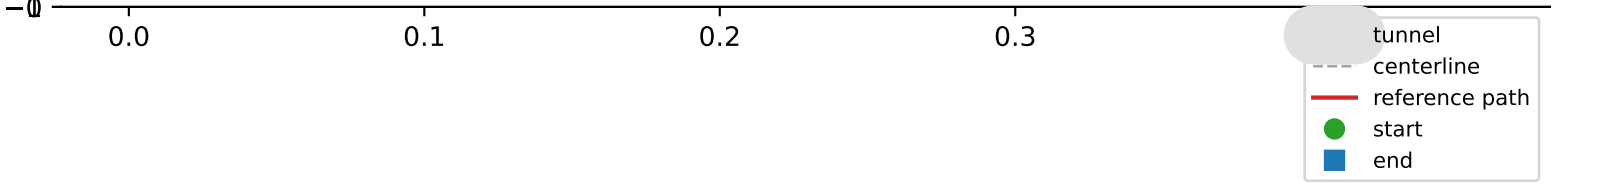

tid 13 straight W=30mm | cut@high-kappa 0.0/0.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 15.0 mm

$1e-6 + 1.30001e-1$

0

0.0


0.1

0.2

0.3

- tunnel
- centerline
- reference path
- start
- end

tid 14 straight W=40mm | cut@high-kappa 0.0/0.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 20.0 mm

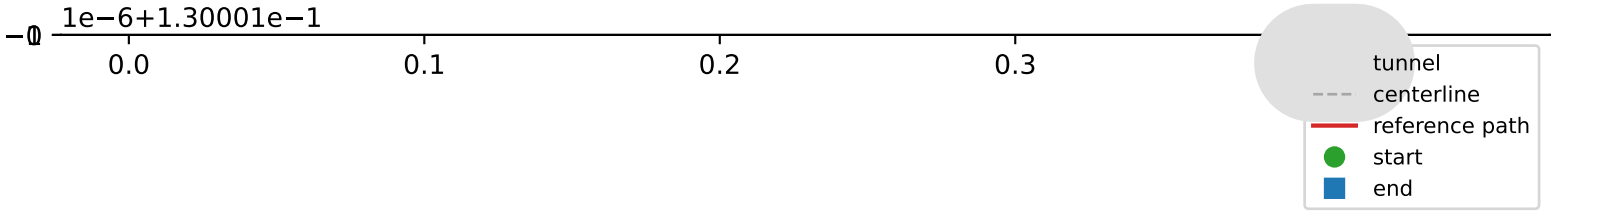

tid 15 straight W=50mm | cut@high-kappa 0.0/0.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 25.0 mm


0
 $1e-6+1.3e-1$

0.0

0.1


0.2


0.3





-  tunnel
-  centerline
-  reference path
-  start
-  end


tid 26 gentle_sinusoidal W=10mm | cut@high-kappa 1.3/1.3 mm | straight-leg ripple p95 0.5 mm | mirror wall clearance 3.7 mm

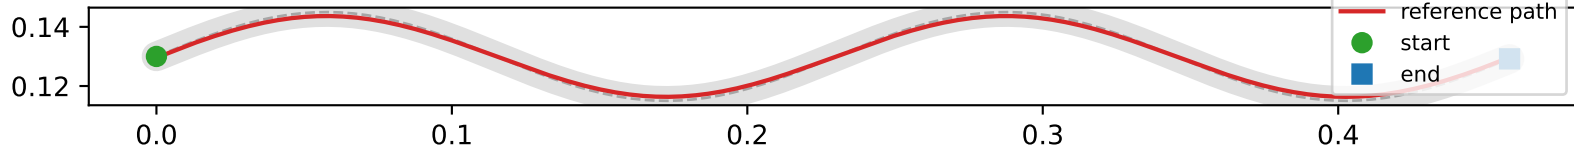

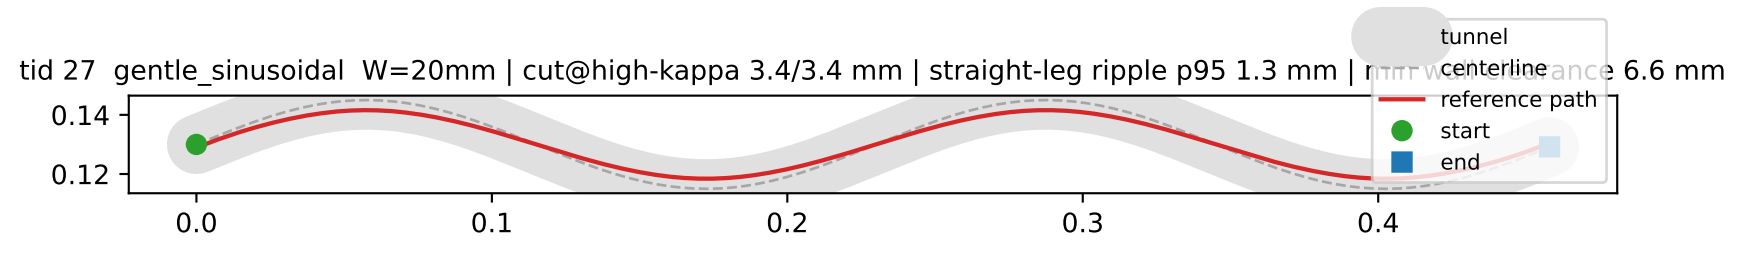


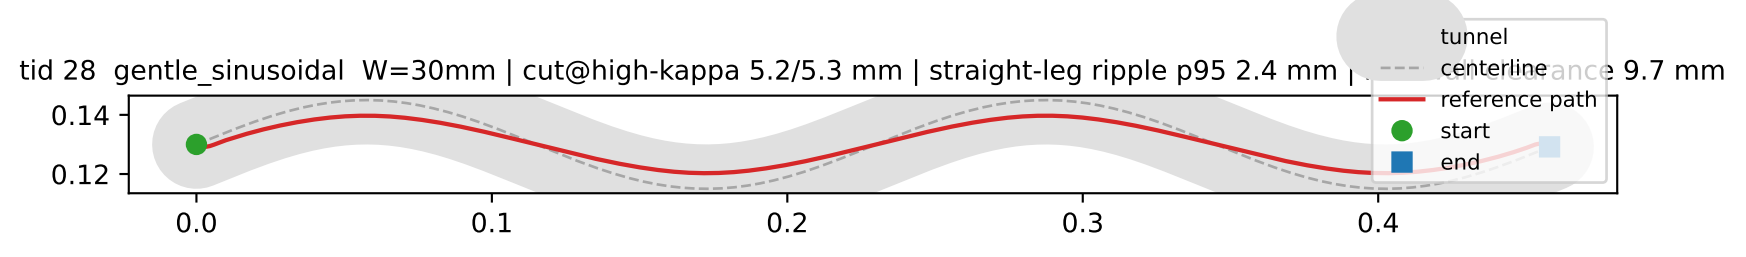

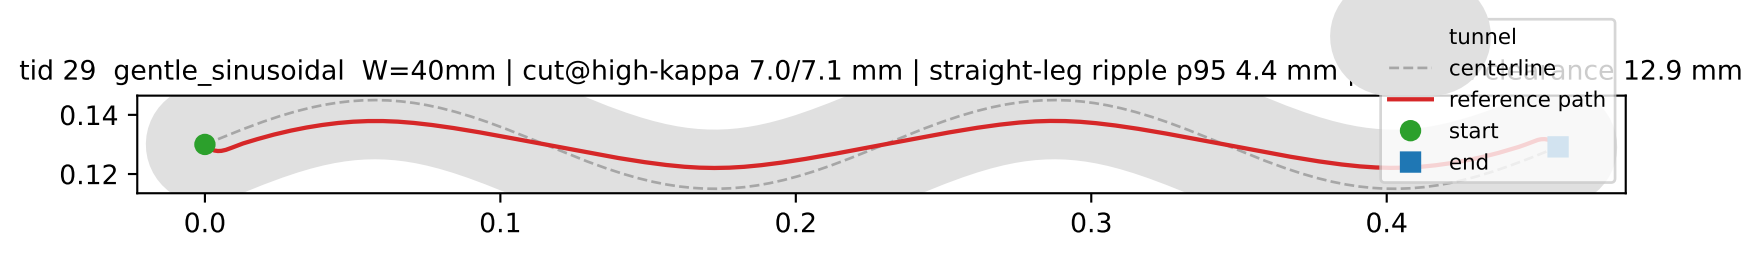


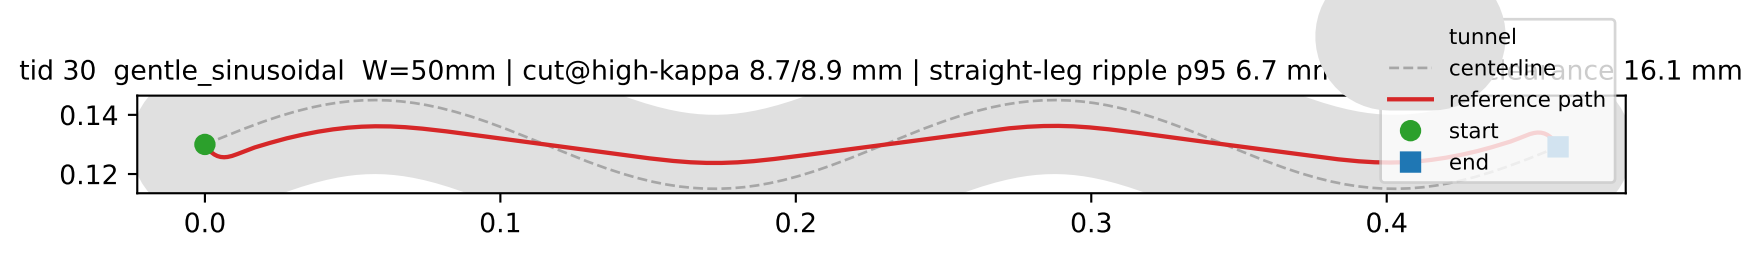


tid 31 sharp_sinusoidal W=10mm | cut@high-kappa 0.7/0.7 mm | straight-leg ripple p95 0.2 mm | min wall clearance 4.3 mm

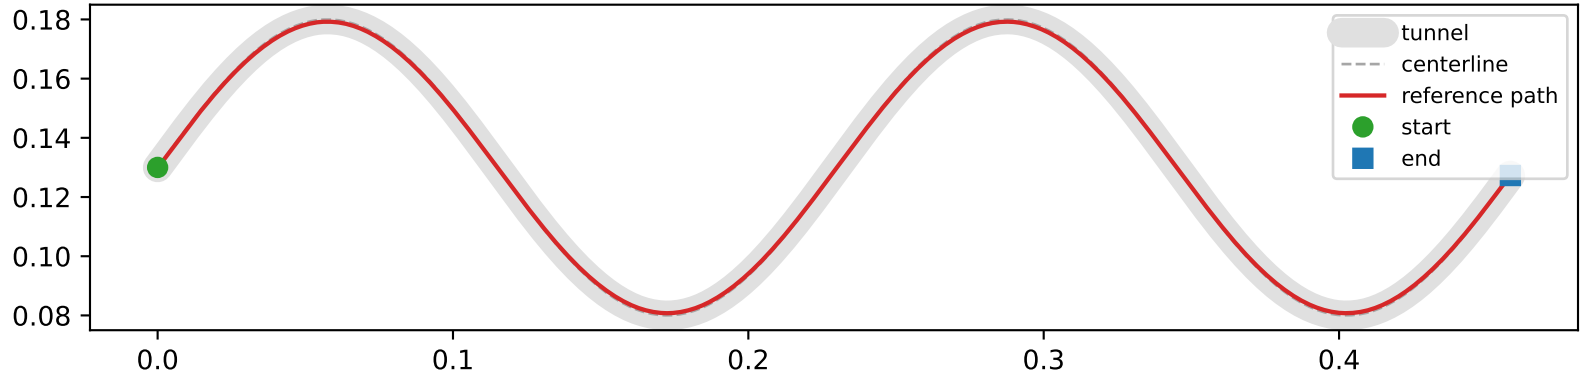


tid 32 sharp_sinusoidal W=20mm | cut@high-kappa 1.8/1.9 mm | straight-leg ripple p95 0.4 mm | min wall clearance 8.1 mm

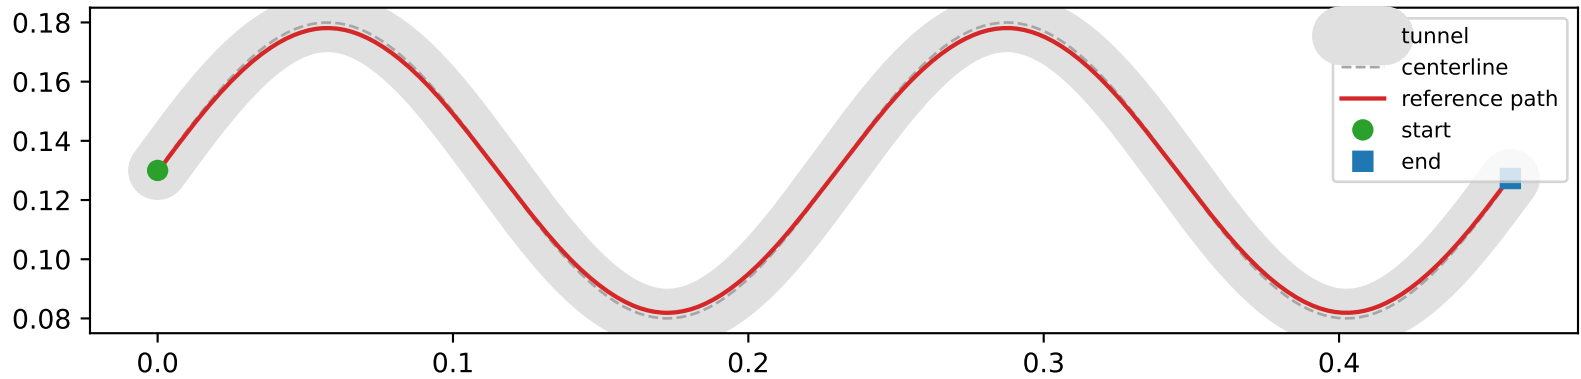

tid 33 sharp_sinusoidal W=30mm | cut@high-kappa 2.8/2.9 mm | straight-leg ripple p95 0.6 mm | min wall clearance 12.1 mm

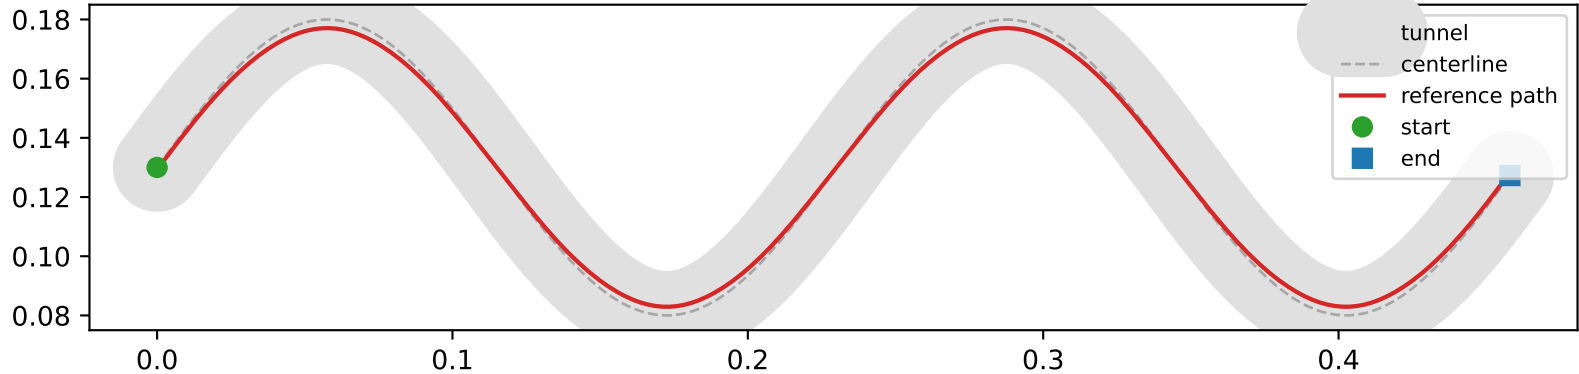

tid 34 sharp_sinusoidal W=40mm | cut@high-kappa 3.8/3.9 mm | straight-leg ripple p95 1.3 mm | ripple clearance 16.1 mm

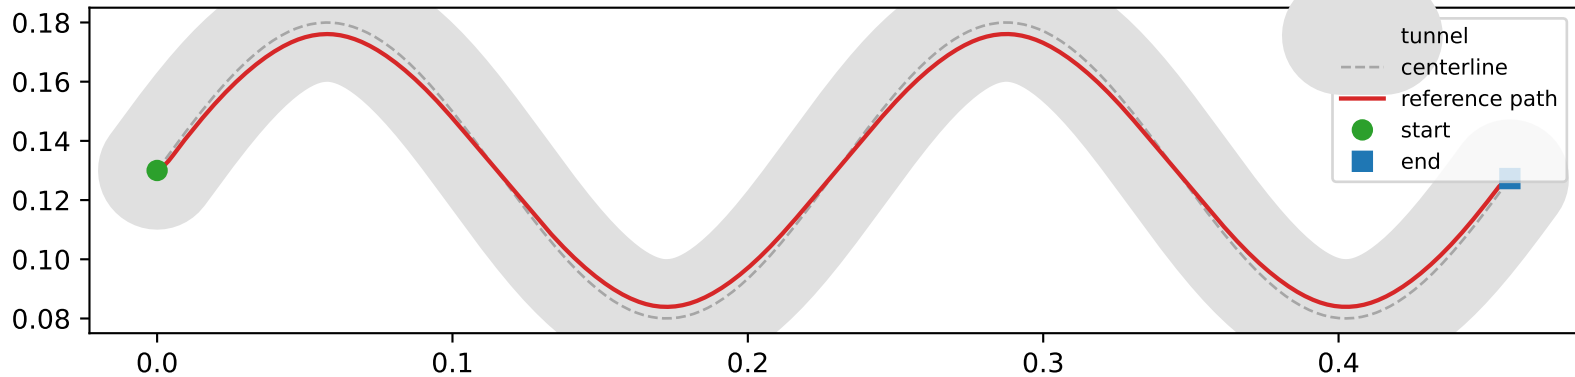

tid 35 sharp_sinusoidal W=50mm | cut@high-kappa 4.8/4.8 mm | straight-leg ripple p95 2.5 mm | clearance 20.1 mm

