




tid 1 sinusoidal W=10mm | cut@high-kappa 0.9/0.9 mm | straight-leg ripple p95 0.0 mm | min wall clearance 4.1 mm

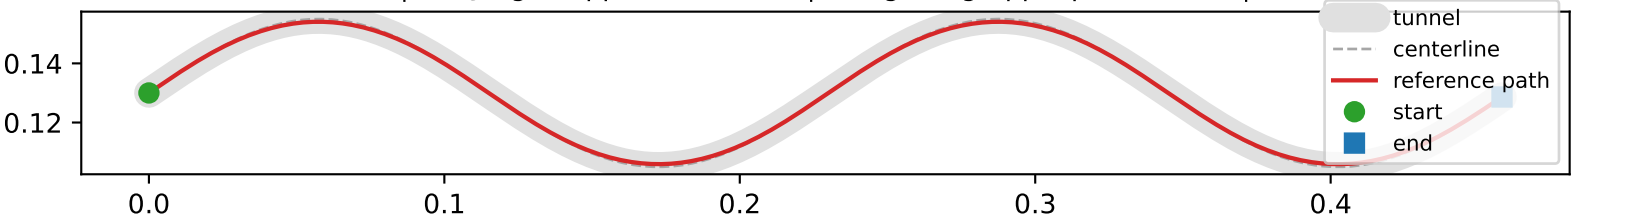


tid 2 sinusoidal W=20mm | cut@high-kappa 2.4/2.5 mm | straight-leg ripple p95 0.5 mm | min wall clearance 7.5 mm

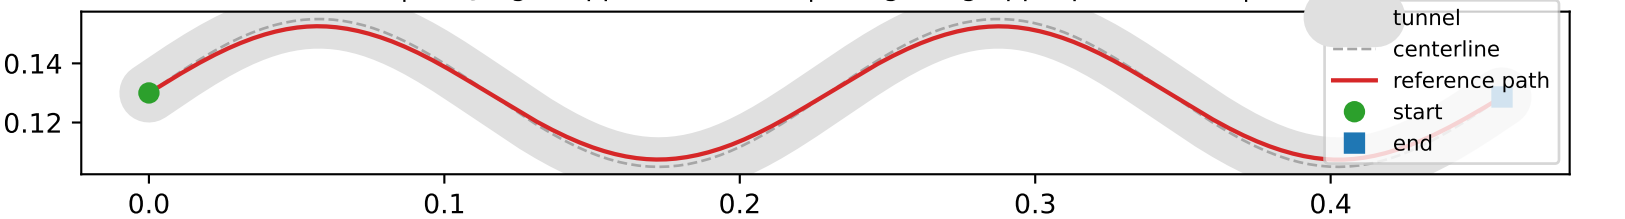


tid 3 sinusoidal W=30mm | cut@high-kappa 4.2/4.2 mm | straight-leg ripple p95 0.9 mm | min clearance 10.8 mm

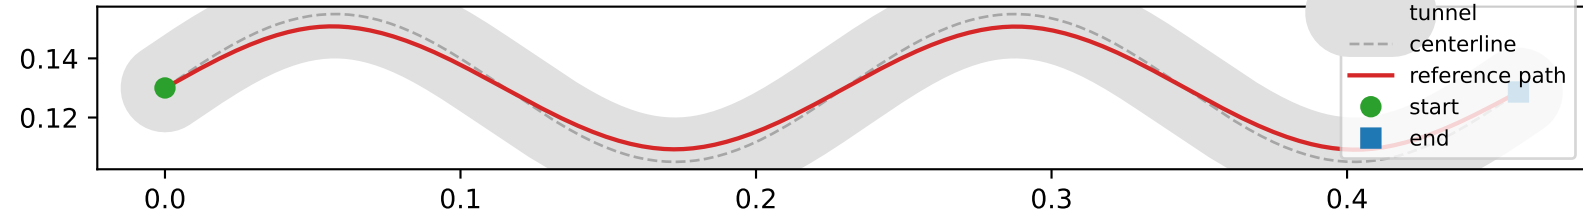


tid 4 sinusoidal W=40mm | cut@high-kappa 5.9/6.0 mm | straight-leg ripple p95 1.2 mm | mi range 14.0 mm

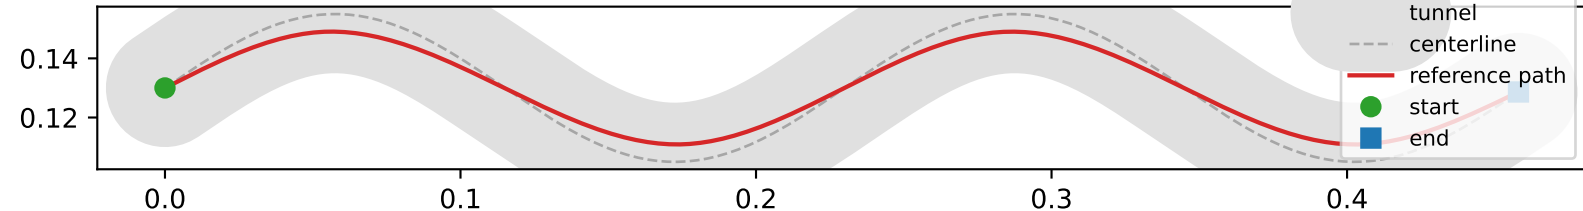


tid 5 sinusoidal W=50mm | cut@high-kappa 7.6/7.8 mm | straight-leg ripple p95 1.6 mm | m distance 17.2 mm

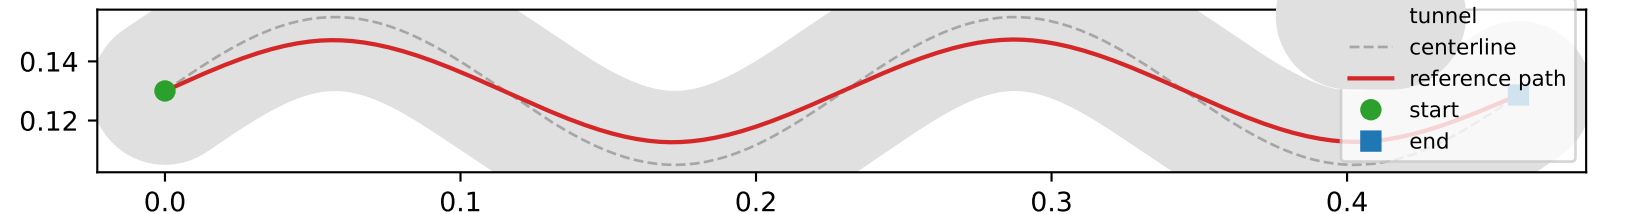


tid 6 corner W=10mm | cut@high-kappa 0.3/1.3 mm | straight-leg ripple p95 0.0 mm | min wall clearance 3.0 mm

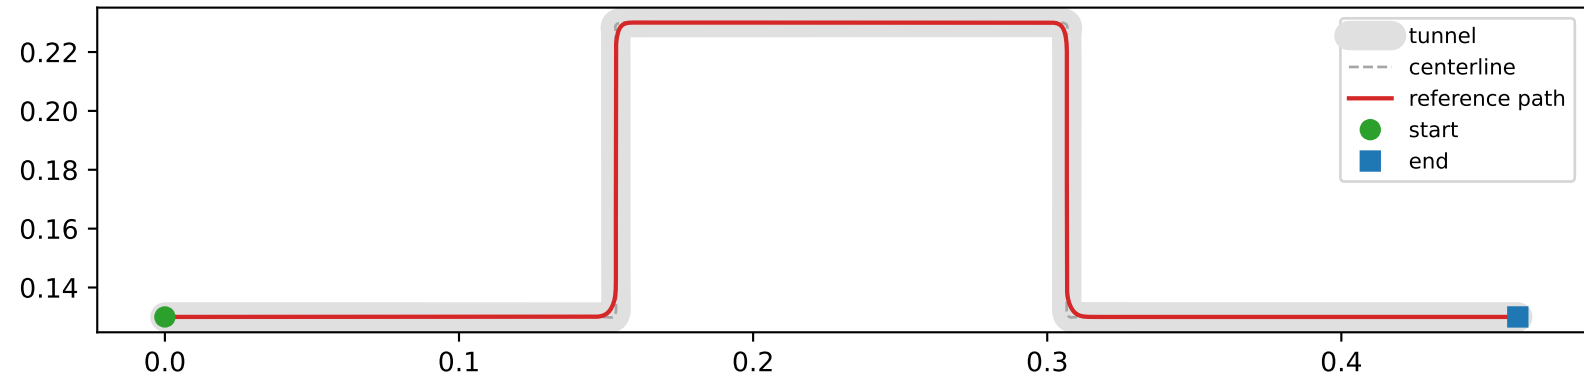


tid 7 corner W=20mm | cut@high-kappa 1.1/3.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 6.7 mm

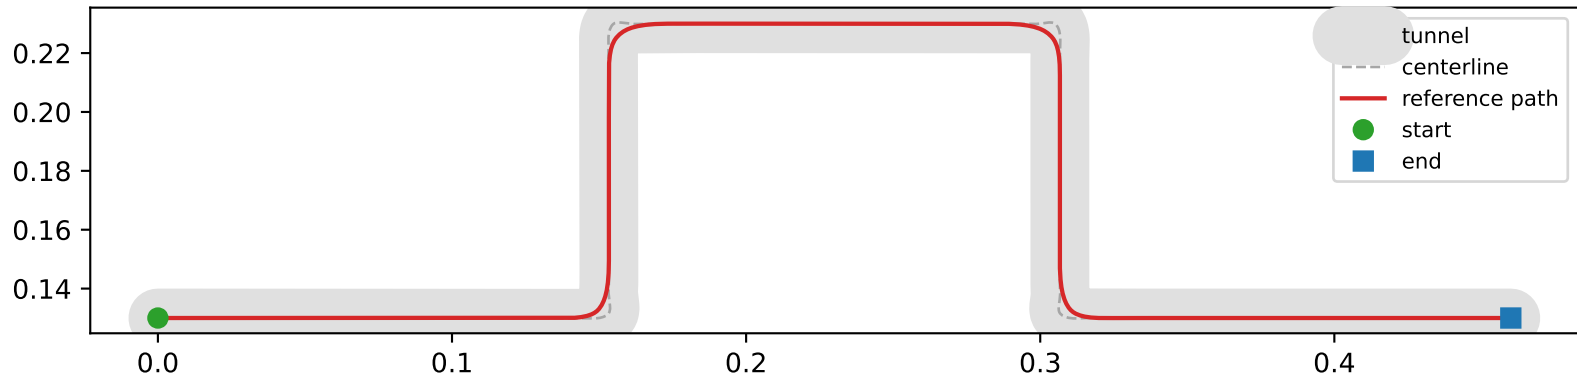


tid 8 corner W=30mm | cut@high-kappa 2.1/4.5 mm | straight-leg ripple p95 0.0 mm | min wall clearance 9.6 mm

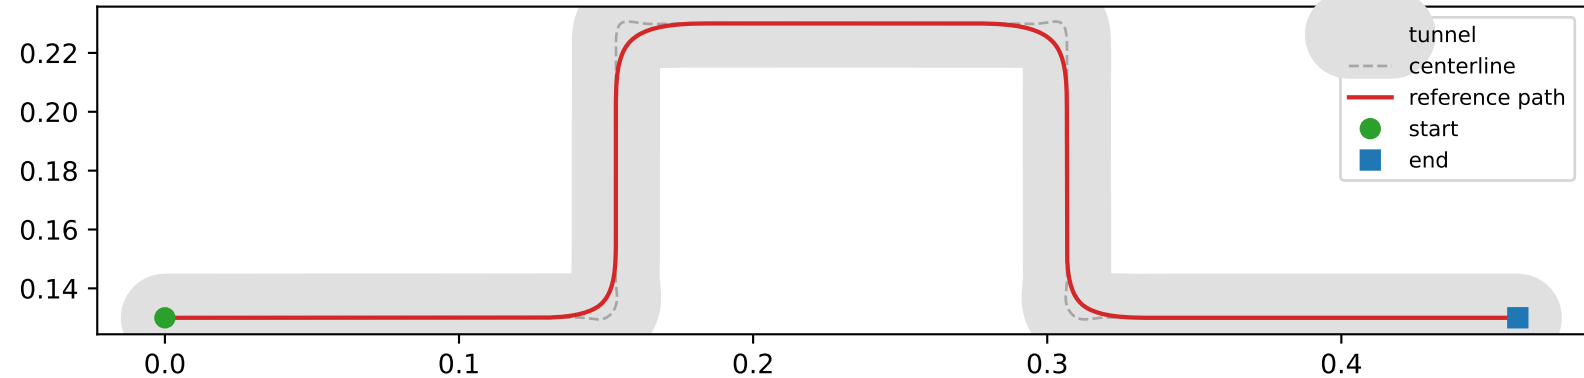

tid 9 corner W=40mm | cut@high-kappa 3.6/6.5 mm | straight-leg ripple p95 0.0 mm | min wall clearance 12.7 mm

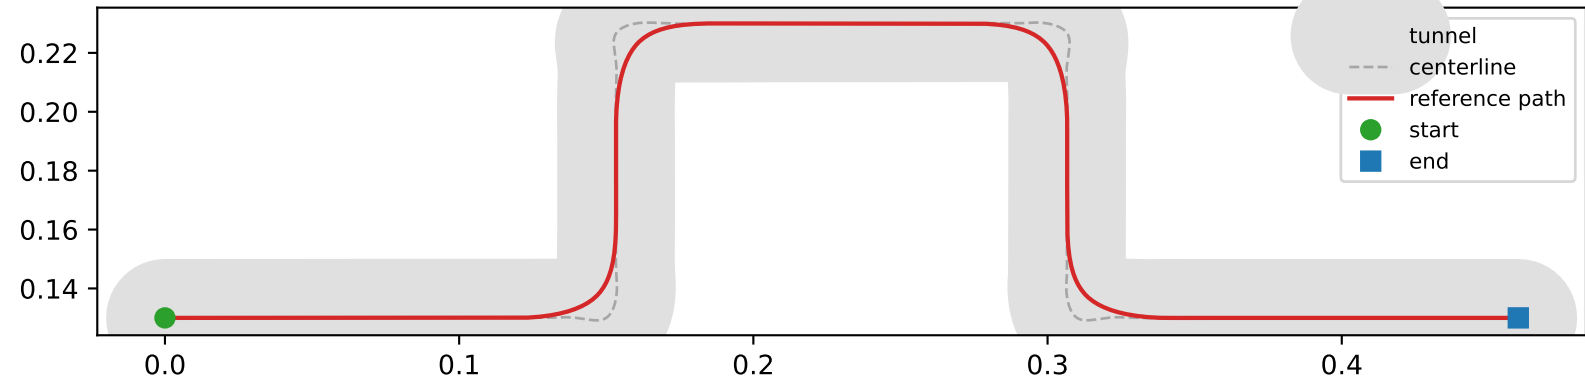

tid 10 corner W=50mm | cut@high-kappa 2.7/5.0 mm | straight-leg ripple p95 0.0 mm | min distance 16.5 mm

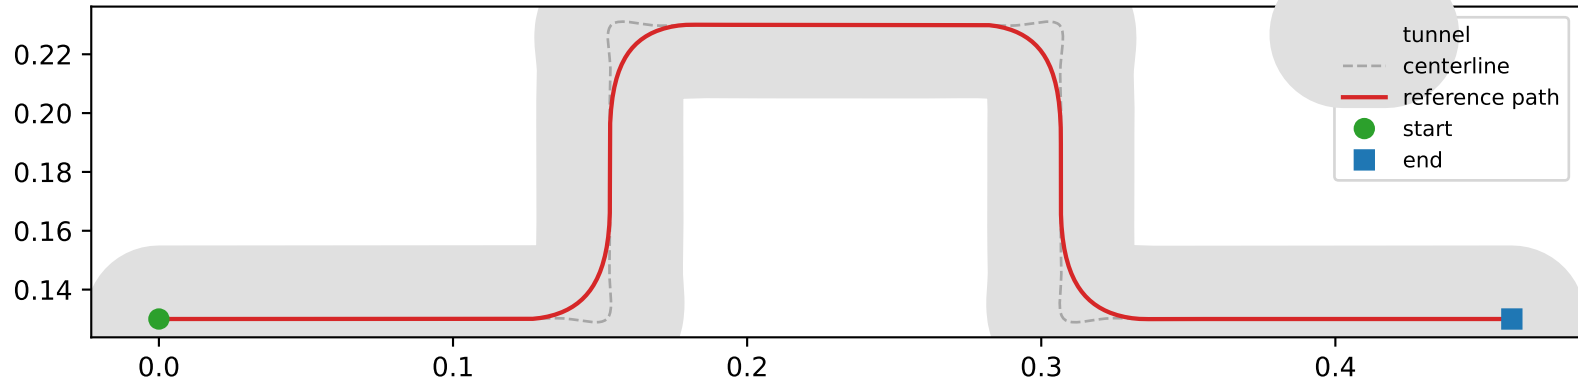

tid 11 straight W=10mm | cut@high-kappa 0.0/0.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 5.0 mm

$1e-6 + 1.30001e-1$

-0


0.0

0.1

0.2


0.3

0



tid 12 straight W=20mm | cut@high-kappa 0.0/0.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 10.0 mm

$1e-6 + 1.30001e-1$

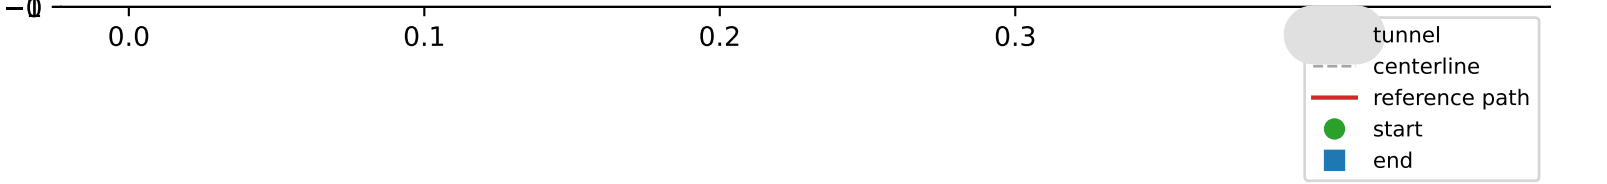

tid 13 straight W=30mm | cut@high-kappa 0.0/0.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 15.0 mm

$1e-6 + 1.30001e-1$

0

0.0


0.1

0.2

0.3

- tunnel
- centerline
- reference path
- start
- end

tid 14 straight W=40mm | cut@high-kappa 0.0/0.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 20.0 mm

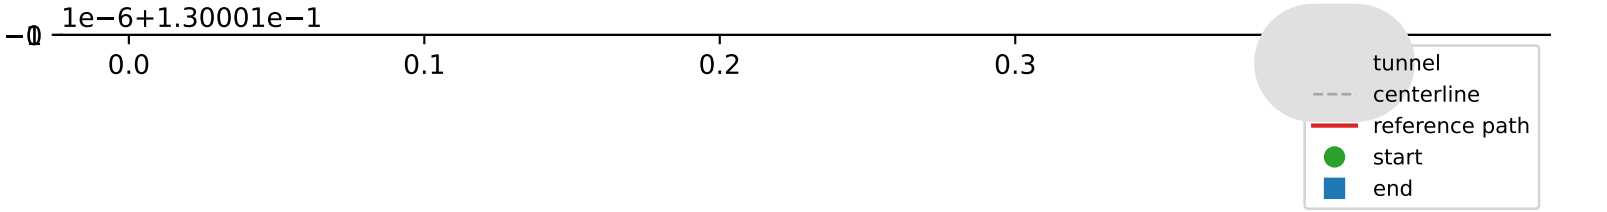

tid 15 straight W=50mm | cut@high-kappa 0.0/0.0 mm | straight-leg ripple p95 0.0 mm | min wall clearance 25.0 mm

$1e-6 + 1.30001e-1$




0.0

0.1

0.2

0.3



tunnel


centerline

reference path


start


end


tid 26 gentle_sinusoidal W=10mm | cut@high-kappa 0.5/0.6 mm | straight-leg ripple p95 0.1 mm | mirror wall clearance 4.4 mm

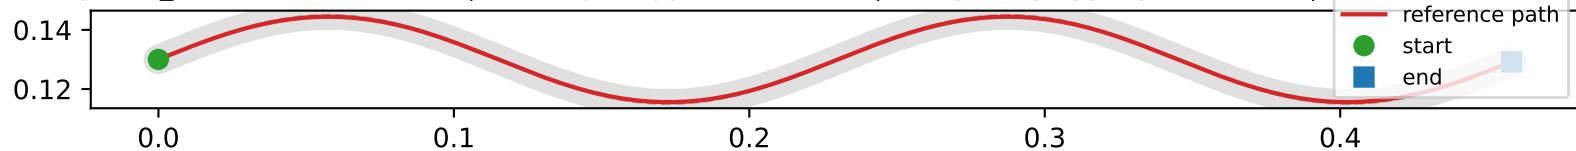


tid 27 gentle_sinusoidal W=20mm | cut@high-kappa 2.4/2.4 mm | straight-leg ripple p95 0.5 mm | minntr wall clearance 7.5 mm

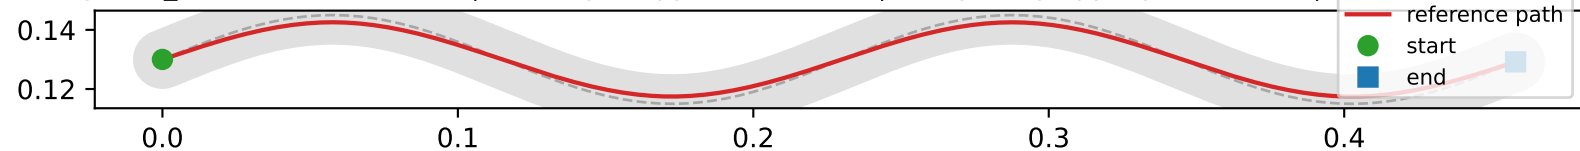


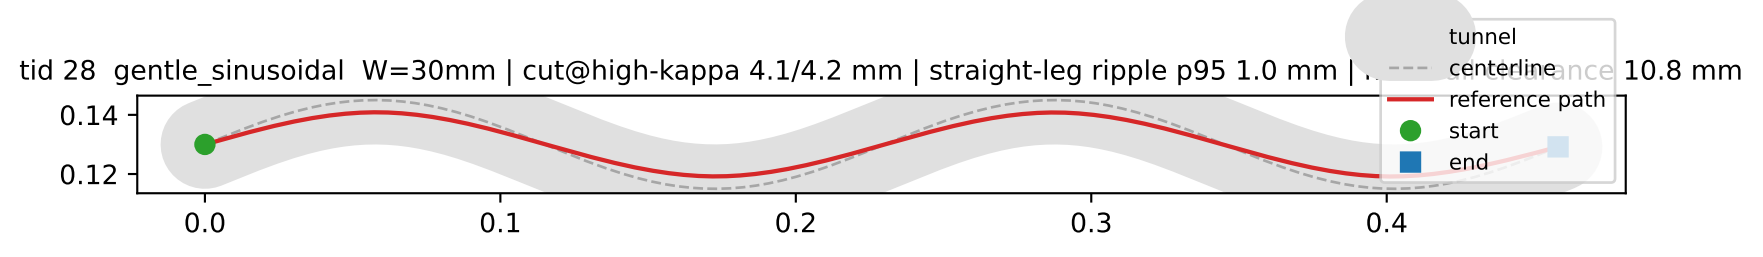

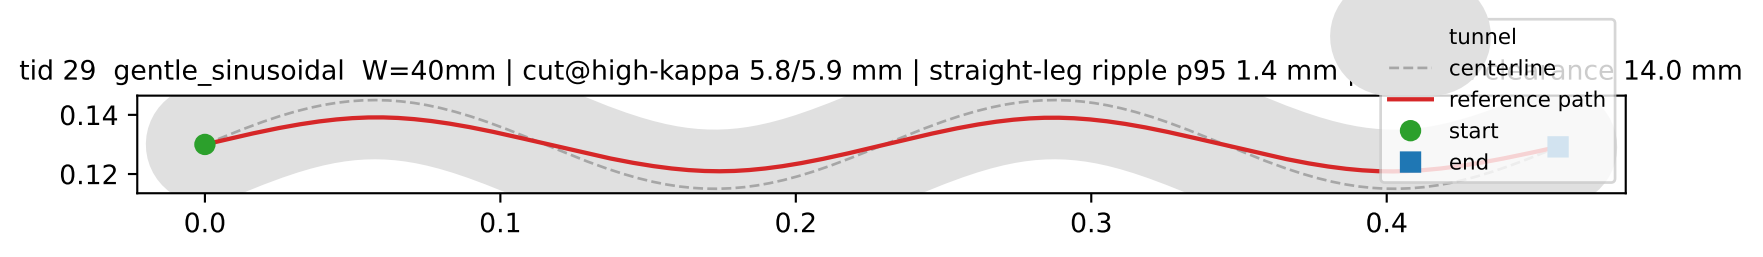


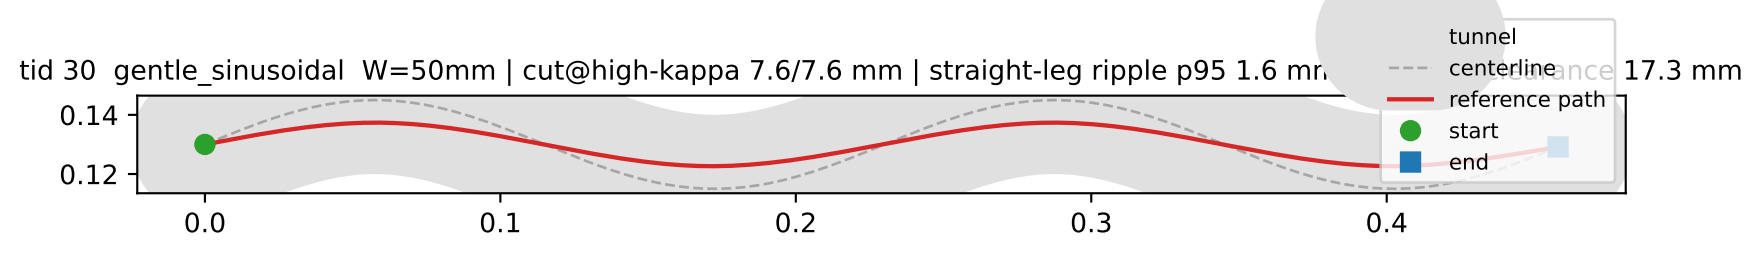


tid 31 sharp_sinusoidal W=10mm | cut@high-kappa 0.9/0.9 mm | straight-leg ripple p95 0.0 mm | min wall clearance 4.1 mm

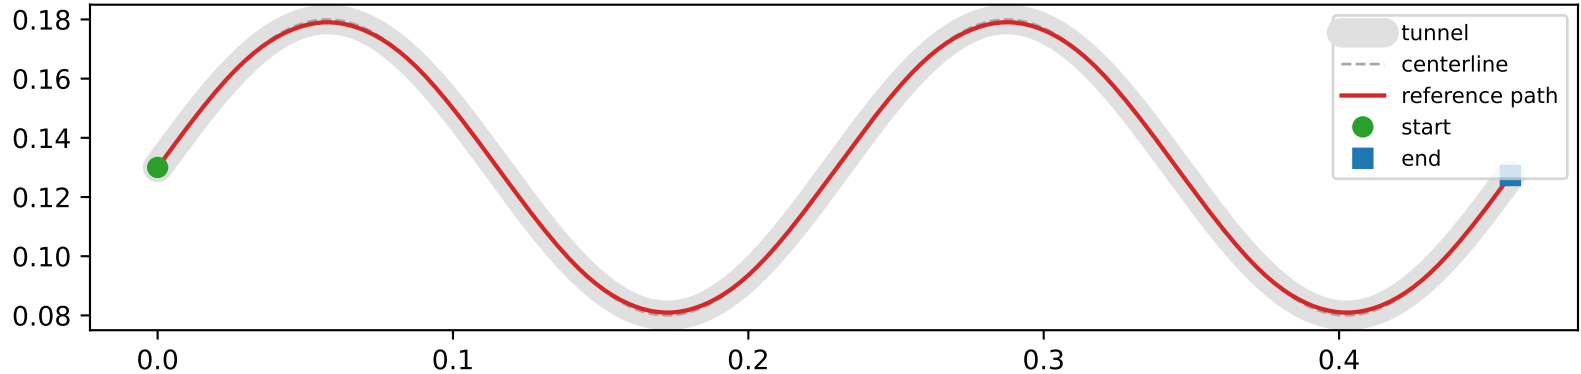


tid 32 sharp_sinusoidal W=20mm | cut@high-kappa 2.4/2.5 mm | straight-leg ripple p95 0.0 mm | min wall clearance 7.5 mm

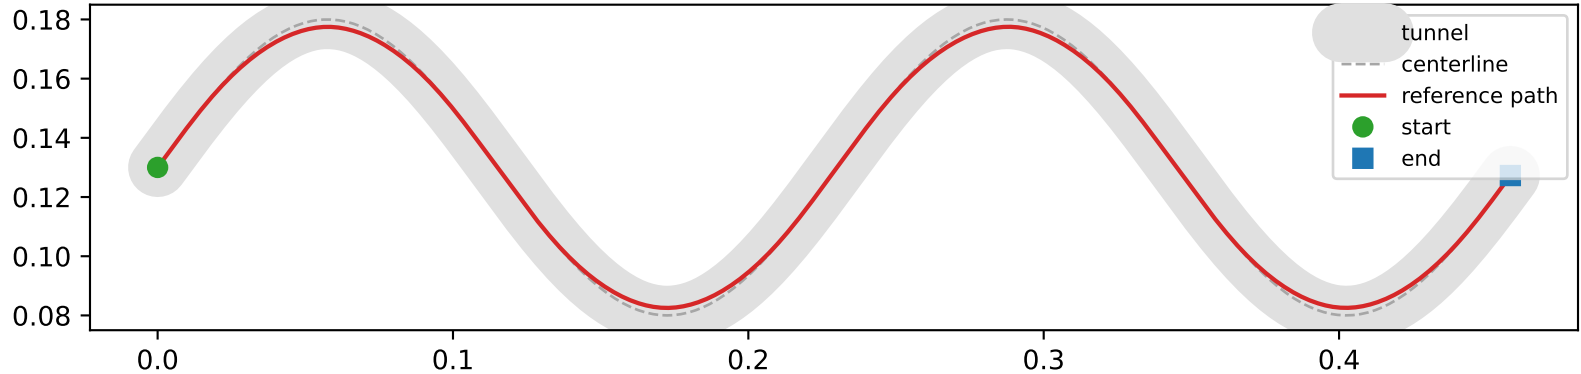

tid 33 sharp_sinusoidal W=30mm | cut@high-kappa 4.2/4.4 mm | straight-leg ripple p95 0.3 mm | min wall clearance 10.6 mm

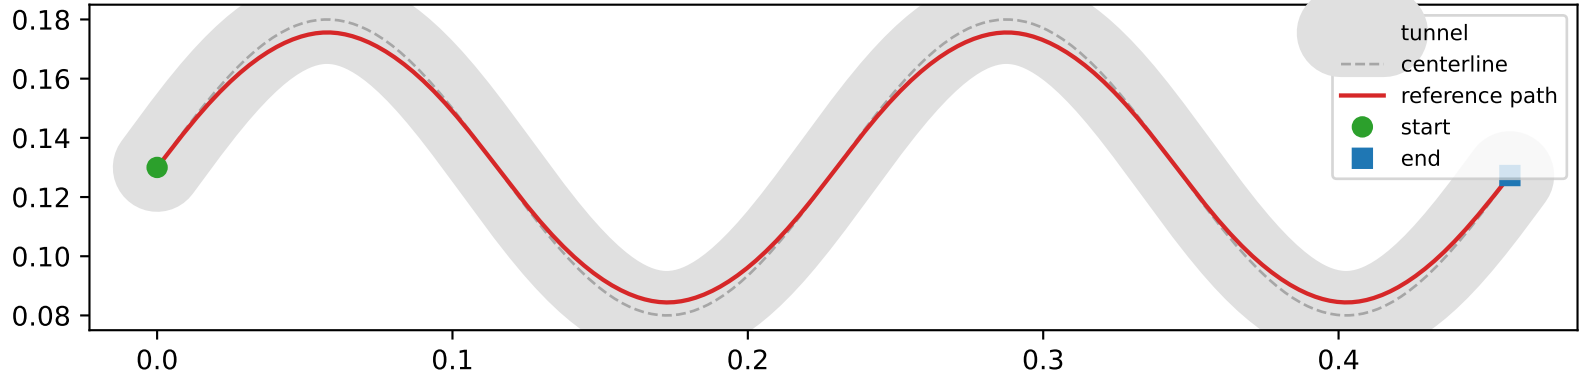

tid 34 sharp_sinusoidal W=40mm | cut@high-kappa 6.0/6.2 mm | straight-leg ripple p95 0.7 mm | ripple clearance 13.8 mm

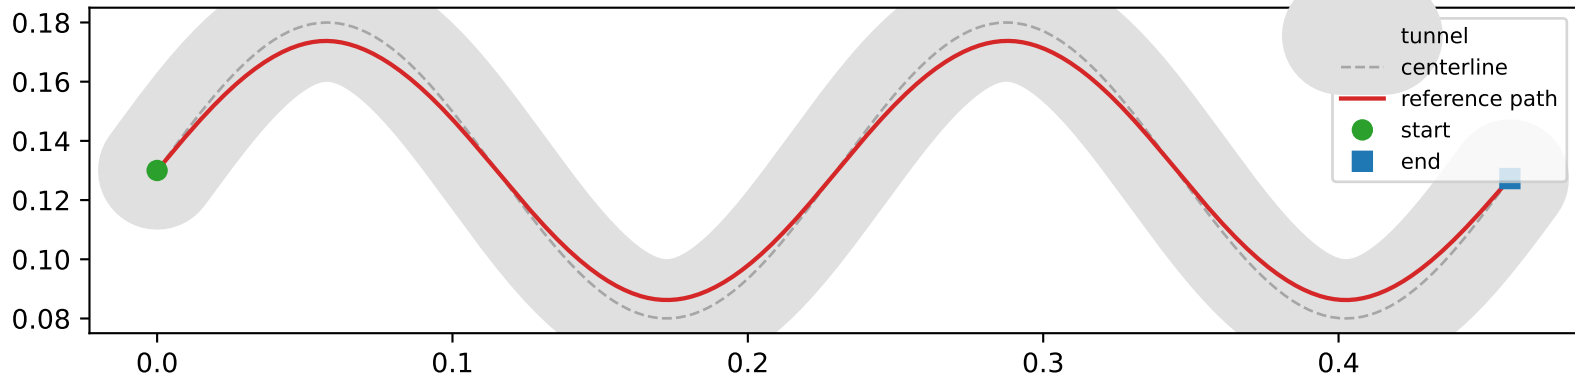

tid 35 sharp_sinusoidal W=50mm | cut@high-kappa 7.7/8.1 mm | straight-leg ripple p95 1.1 mm | clearance 16.9 mm

