


19. Translation Lookaside Buffers

Operating System: Three Easy Pieces

- Part of the chip's memory-management unit(MMU).
- A hardware cache of **popular** virtual-to-physical address translation.

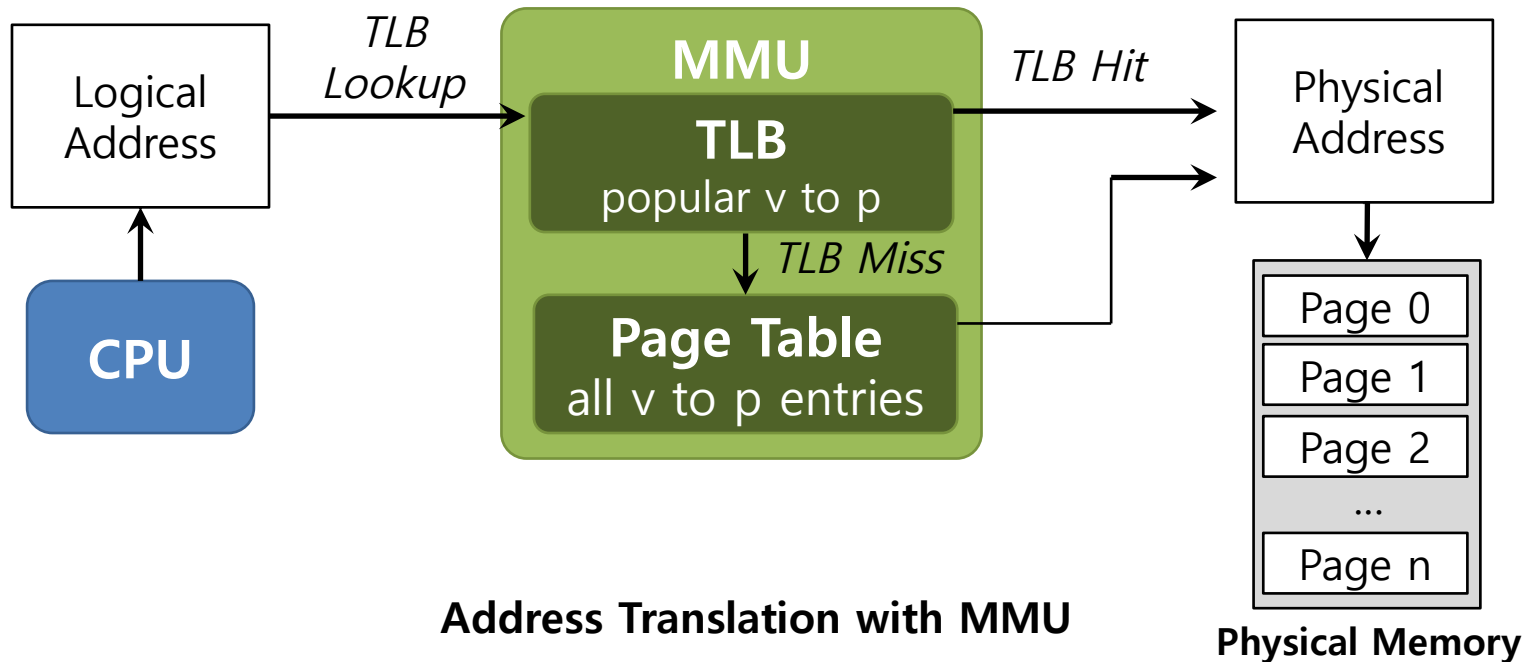

TLB Basic Algorithms

```
1: VPN = (VirtualAddress & VPN_MASK ) >> SHIFT
2: (Success , TlbEntry) = TLB_Lookup(VPN)
3:     if (Success == Ture){ // TLB Hit
4:         if (CanAccess(TlbEntry.ProtectBit) == True ){
5:             offset = VirtualAddress & OFFSET_MASK
6:             PhysAddr = (TlbEntry.PFN << SHIFT) | Offset
7:             AccessMemory( PhysAddr )
8:         }else RaiseException(PROTECTION_ERROR)
```

- ◆ (1 lines) extract the virtual page number(VPN).
- ◆ (2 lines) check if the TLB holds the transalation for this VPN.
- ◆ (5-8 lines) extract the page frame number from the relevant TLB entry, and form the desired physical address and access memory.

TLB Basic Algorithms (Cont.)

```
11:      }else{ //TLB Miss
12:          PTEAddr = PTBR + (VPN * sizeof(PTE))
13:          PTE = AccessMemory(PTEAddr)
14:          (...)
15:      }else{
16:          TLB_Insert( VPN , PTE.PFN , PTE.ProtectBits)
17:          RetryInstruction()
18:      }
19: }
```

- ◆ (11-12 lines) The hardware accesses the page table to find the translation.
- ◆ (16 lines) updates the TLB with the translation.

Example: Accessing An Array

- How a TLB can improve its performance.

	OFFSET				
	00	04	08	12	16
VPN = 00					
VPN = 01					
VPN = 03					
VPN = 04					
VPN = 05					
VPN = 06		a[0]	a[1]	a[2]	
VPN = 07	a[3]	a[4]	a[5]	a[6]	
VPN = 08	a[7]	a[8]	a[9]		
VPN = 09					
VPN = 10					
VPN = 11					
VPN = 12					
VPN = 13					
VPN = 14					
VPN = 15					

```
0:      int sum = 0 ;
1:      for( i=0; i<10; i++){
2:                  sum+=a[i];
3:      }
```


**The TLB improves performance
due to **spatial locality****

3 misses and 7 hits.
Thus **TLB hit rate** is 70%.

Locality

▣ Temporal Locality


- ◆ An instruction or data item that has been recently accessed will likely be re-accessed soon in the future.

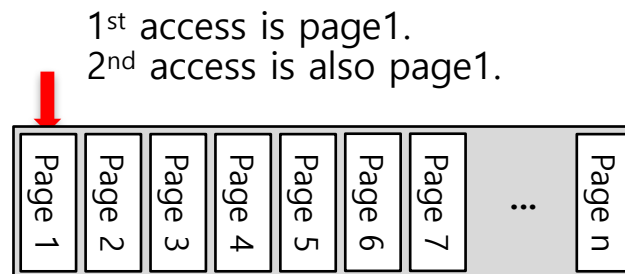

Virtual Memory

▣ Spatial Locality

- ◆ If a program accesses memory at address x , it will likely soon access memory near x .

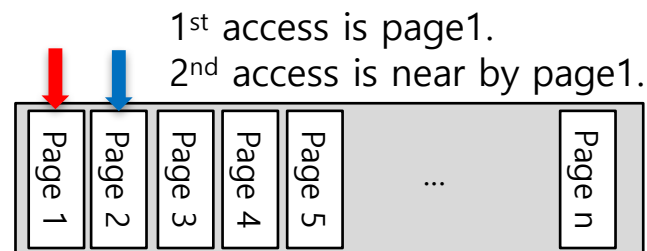

Virtual Memory

Who Handles The TLB Miss?

- ▣ Hardware handle the TLB miss entirely on CISC.
 - ◆ The hardware has to know exactly where the page tables are located in memory.
 - ◆ The hardware would “walk” the page table, find the correct page-table entry and extract the desired translation, update and retry instruction.
 - ◆ hardware-managed TLB.

Who Handles The TLB Miss? (Cont.)

- ▣ RISC have what is known as a **software-managed TLB**.
 - ◆ On a TLB miss, the hardware raises exception(trap handler).
 - **Trap handler is code** within the OS that is written with the express purpose of handling TLB miss.

TLB Control Flow algorithm(OS Handled)

```
1:      VPN = (VirtualAddress & VPN_MASK) >> SHIFT
2:      (Success, TlbEntry) = TLB_Lookup(VPN)
3:      if (Success == True) // TLB Hit
4:          if (CanAccess(TlbEntry.ProtectBits) == True)
5:              Offset = VirtualAddress & OFFSET_MASK
6:              PhysAddr = (TlbEntry.PFN << SHIFT) | Offset
7:              Register = AccessMemory(PhysAddr)
8:          else
9:              RaiseException(PROTECTION_FAULT)
10:     else // TLB Miss
11:         RaiseException(TLB_MISS)
```


TLB entry

- ▣ TLB is managed by **Full Associative** method.
 - ◆ A typical TLB might have 32,64, or 128 entries.
 - ◆ Hardware search the entire TLB in parallel to find the desired translation.
 - ◆ other bits: valid bits , protection bits, address-space identifier, dirty bit




Typical TLB entry look like this

TLB Issue: Context Switching

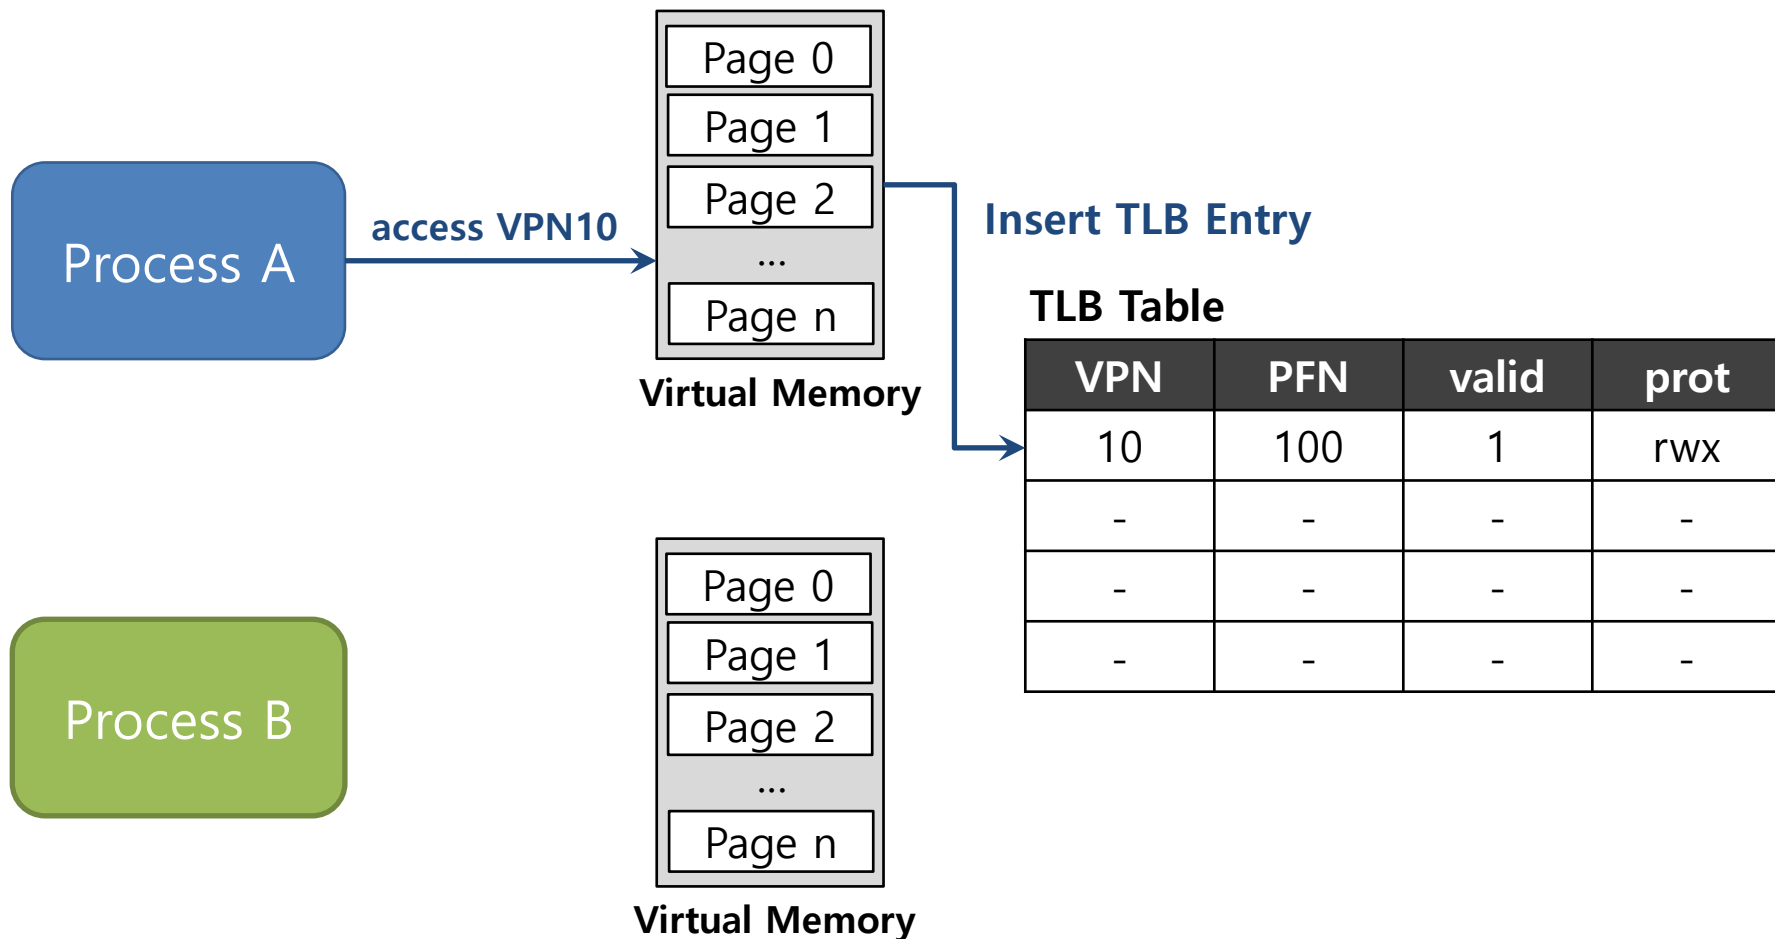


TLB Issue: Context Switching

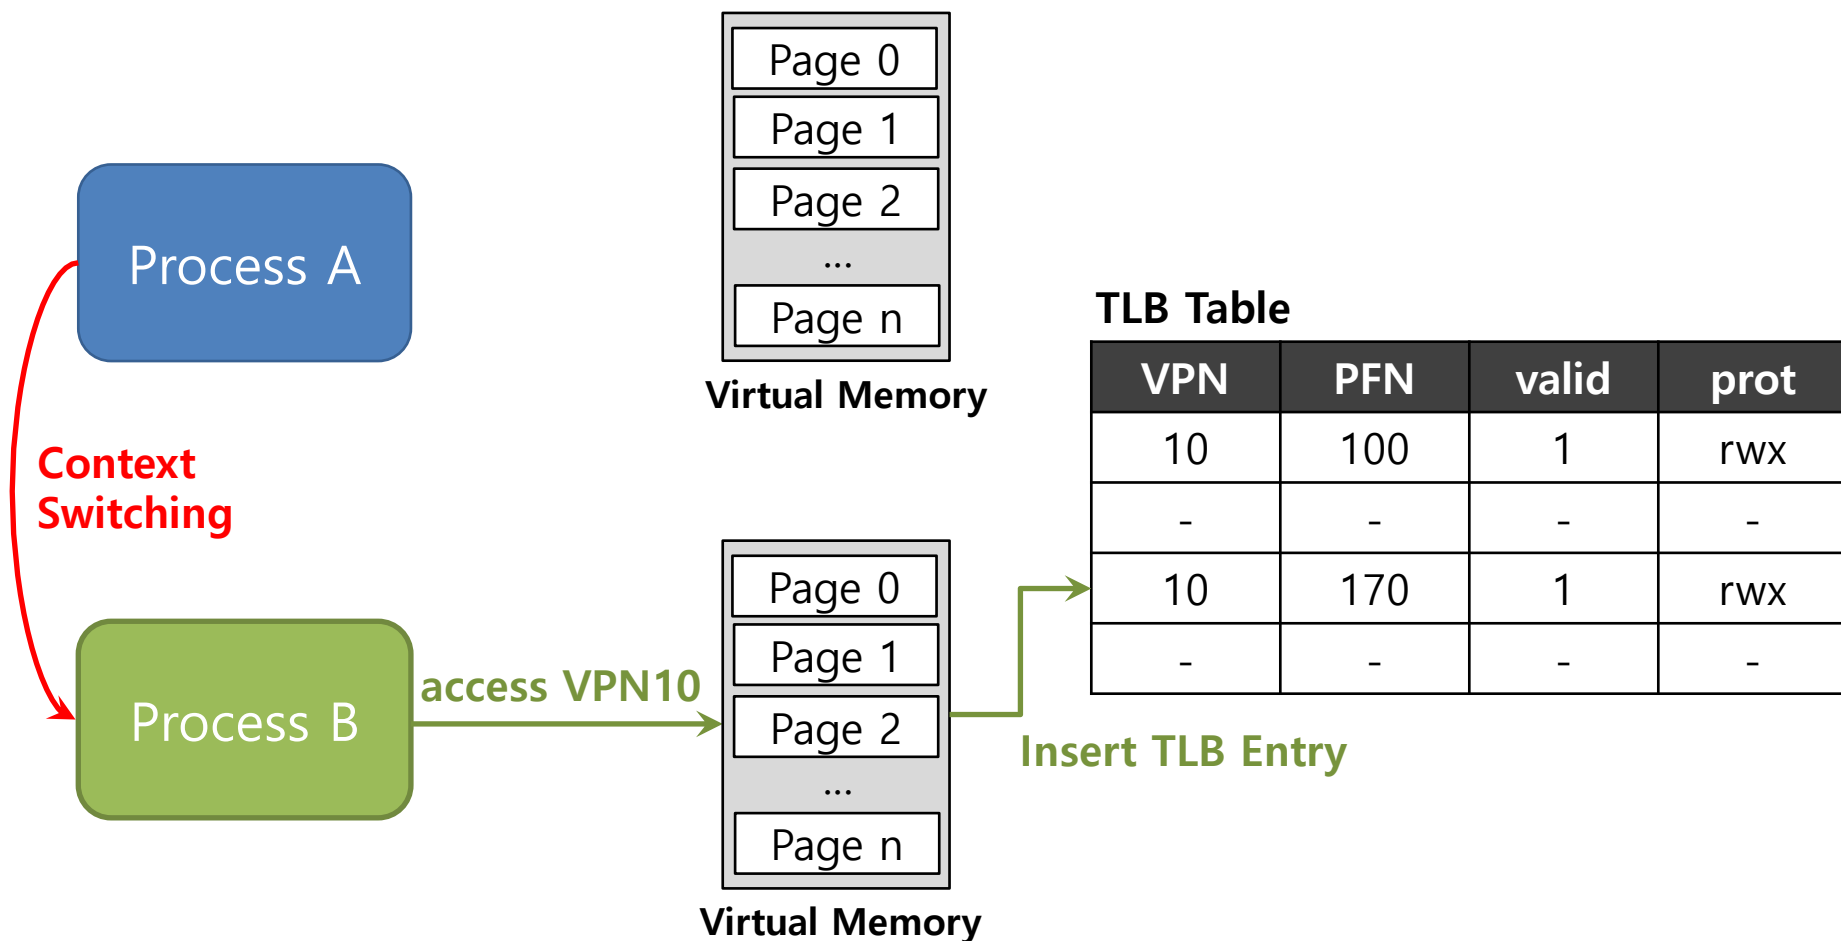


TLB Issue: Context Switching

Process A

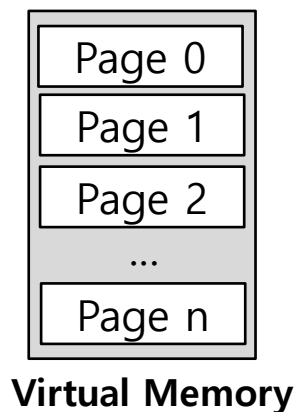

Process B

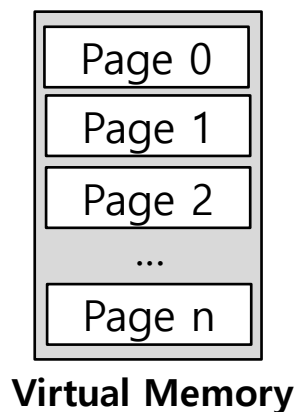

TLB Table


VPN	PFN	valid	prot
10	100	1	rwX
-	-	-	-
10	170	1	rwX
-	-	-	-

Can't Distinguish which entry is meant for which process

To Solve Problem


- Provide an address space identifier(ASID) field in the TLB.

Process A

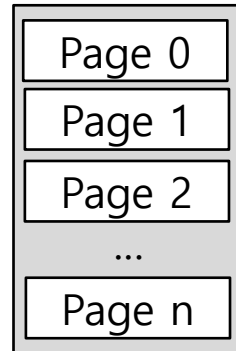

Virtual Memory

Process B

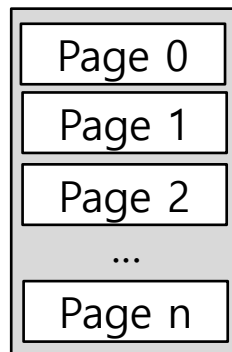

Virtual Memory

TLB Table

VPN	PFN	valid	prot	ASID
10	100	1	rwX	1
-	-	-	-	-
10	170	1	rwX	2
-	-	-	-	-

Another Case

- Two processes **share a page**.
 - Process 1 is sharing physical page 101 with Process2.
 - P1 maps this page into the 10th page of its address space.
 - P2 maps this page to the 50th page of its address space.


VPN	PFN	valid	prot	ASID
10	101	1	rwX	1
-	-	-	-	-
50	101	1	rwX	2
-	-	-	-	-

Sharing of pages is **useful** as it reduces the number of physical pages in use.

TLB Replacement Policy

□ LRU(Least Recently Used)


- ◆ Evict an entry that has not recently been used.
- ◆ Take advantage of *locality* in the memory-reference stream.

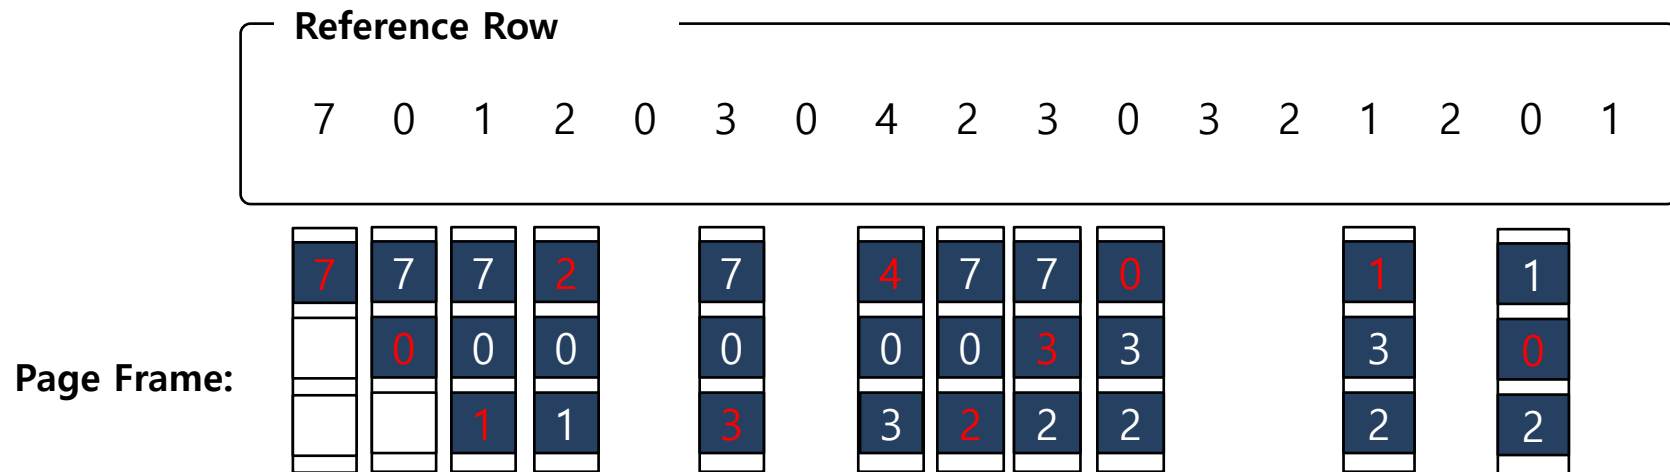

Total 11 TLB miss

A Real TLB Entry

All 64 bits of this TLB entry(example of MIPS R4000)

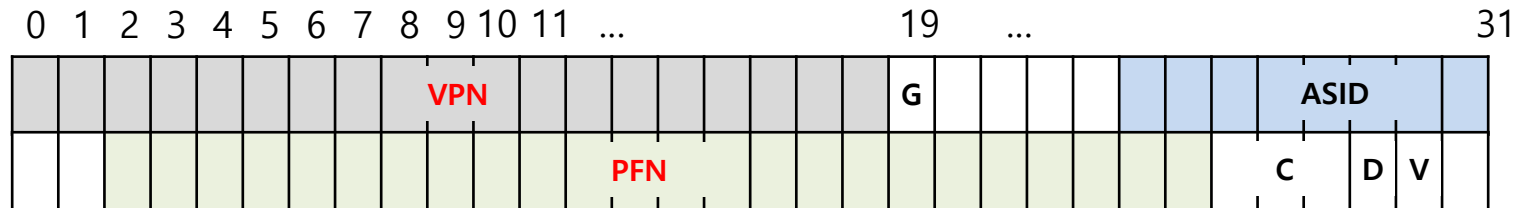

Flag	Content
19-bit VPN	The rest reserved for the kernel.
24-bit PFN	Systems can support with up to 64GB of main memory($2^{24} * 4KB$ pages).
Global bit(G)	Used for pages that are globally-shared among processes.
ASID	OS can use to distinguish between address spaces.
Coherence bit(C)	determine how a page is cached by the hardware.
Dirty bit(D)	marking when the page has been written.
Valid bit(V)	tells the hardware if there is a valid translation present in the entry.

- Disclaimer: This lecture slide set was initially developed for Operating System course in Computer Science Dept. at Hanyang University. This lecture slide set is for OSTEP book written by Remzi and Andrea at University of Wisconsin.