Computer Architecture

Faculty of Computer Science & Engineering - HCMUT

Chapter 1
Computer Abstractions and Technology

Binh Tran-Thanh

thanhbinh@hcmut.edu.vn

The Computer Revolution

- Progress in computer technology
  - Underpinned by Moore's Law
- Makes novel applications feasible
  - Computers in automobiles
  - Cell phones
  - Human genome project
  - World Wide Web
  - Search Engines
- Computers are pervasive

History of Computer Development

- First generation 1945 - 1955
  - vacuum tubes, plug boards
- Second generation 1955 - 1965
  - transistors, batch systems
- Third generation 1965 – 1980
  - ICs and multiprogramming
- Fourth generation 1980 – present
  - personal computers (Desk, Lap)
  - SuperComp.,
  - DataCenter, Clusters, etc.

The Moore's Law

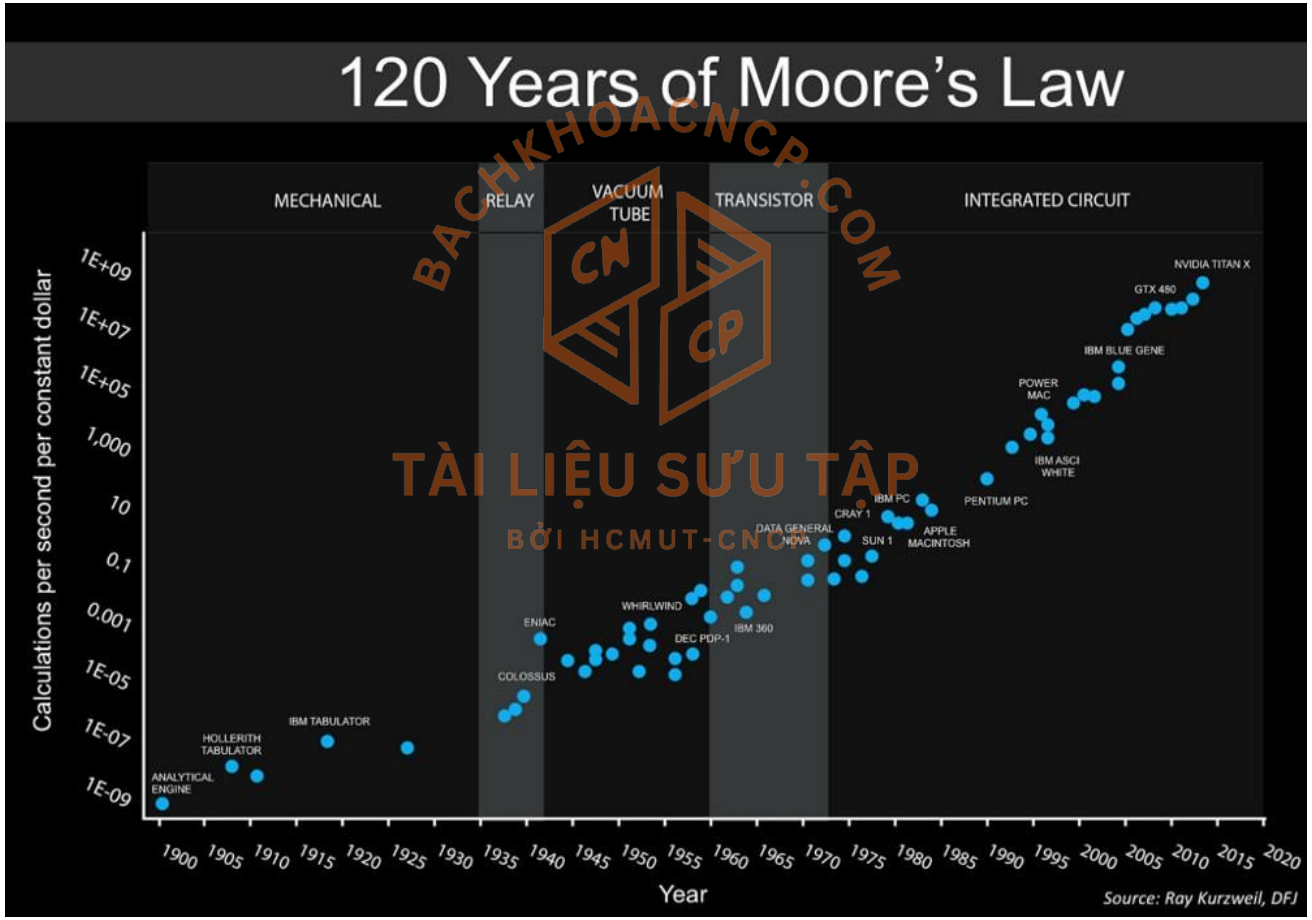

The History: at the very beginning

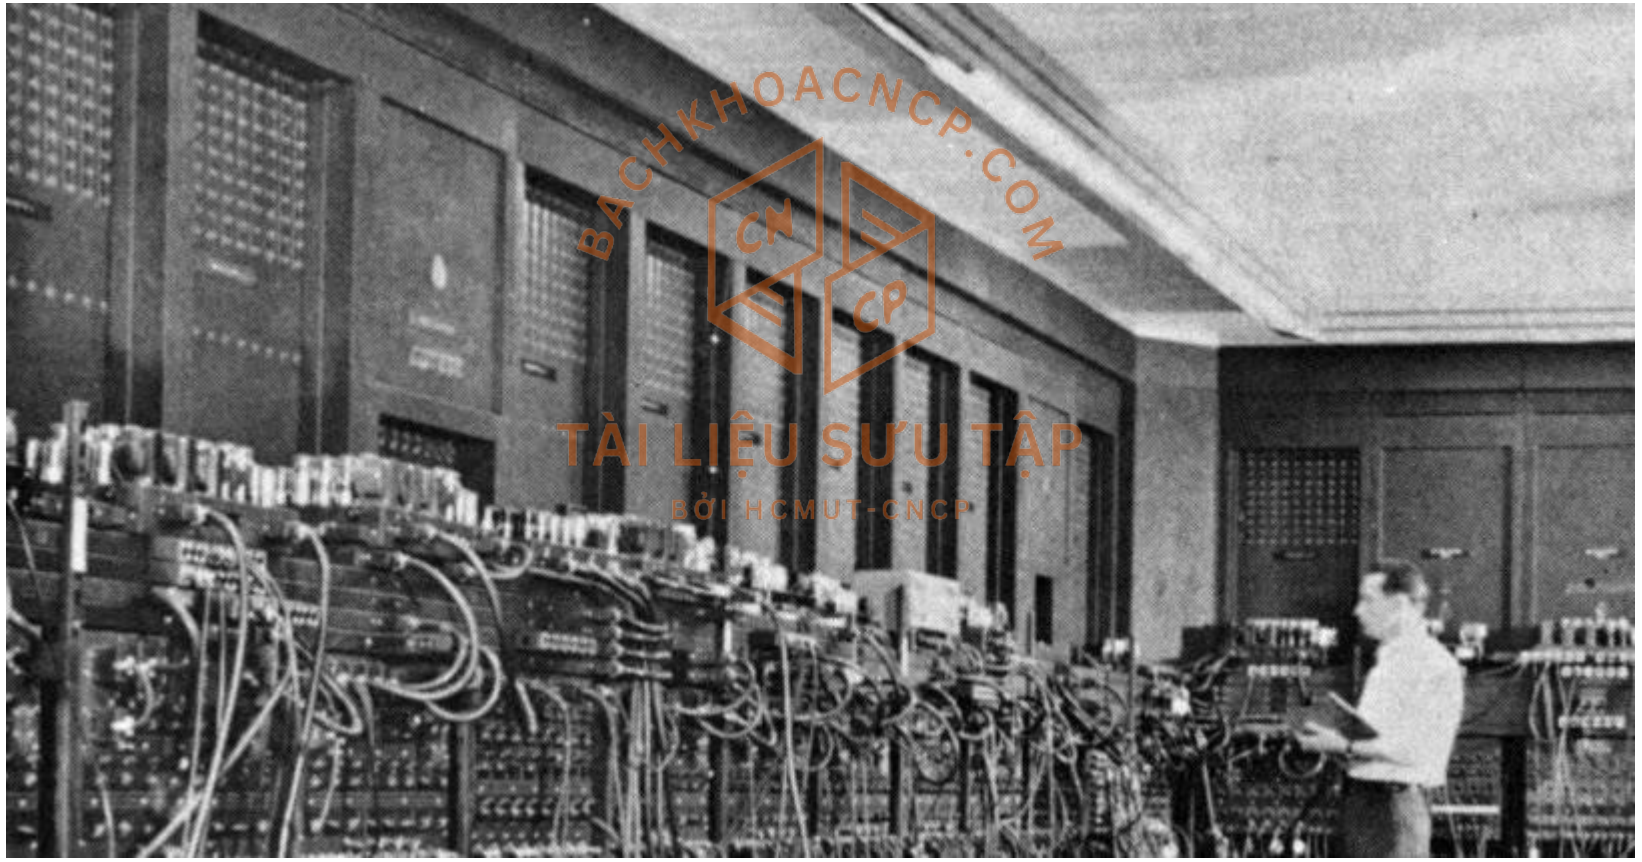

ENIAC, 1943, 30 tons, 200KW, ~1000 ops/sec

The History: Now

Typical 2021 laptop

~1kg, 10W, 10 billion ops/sec

Classes of Computers

Source: internet

Classes of Computers

- Personal computers
  - General purpose, variety of software
  - Subject to cost/performance trade-off
- Embedded computers
  - Hidden as components of systems
  - Stringent power/performance/cost constraints

Classes of Computers

- Server computers
  - Network based
  - High capacity, performance, reliability
  - Range from small servers to building sized
- Supercomputers
  - High end scientific and engineering calculations
  - Highest capability but represent a small fraction of the overall computer market

The PostPC Era has arrived

- Your next computer is not a computer (apple)

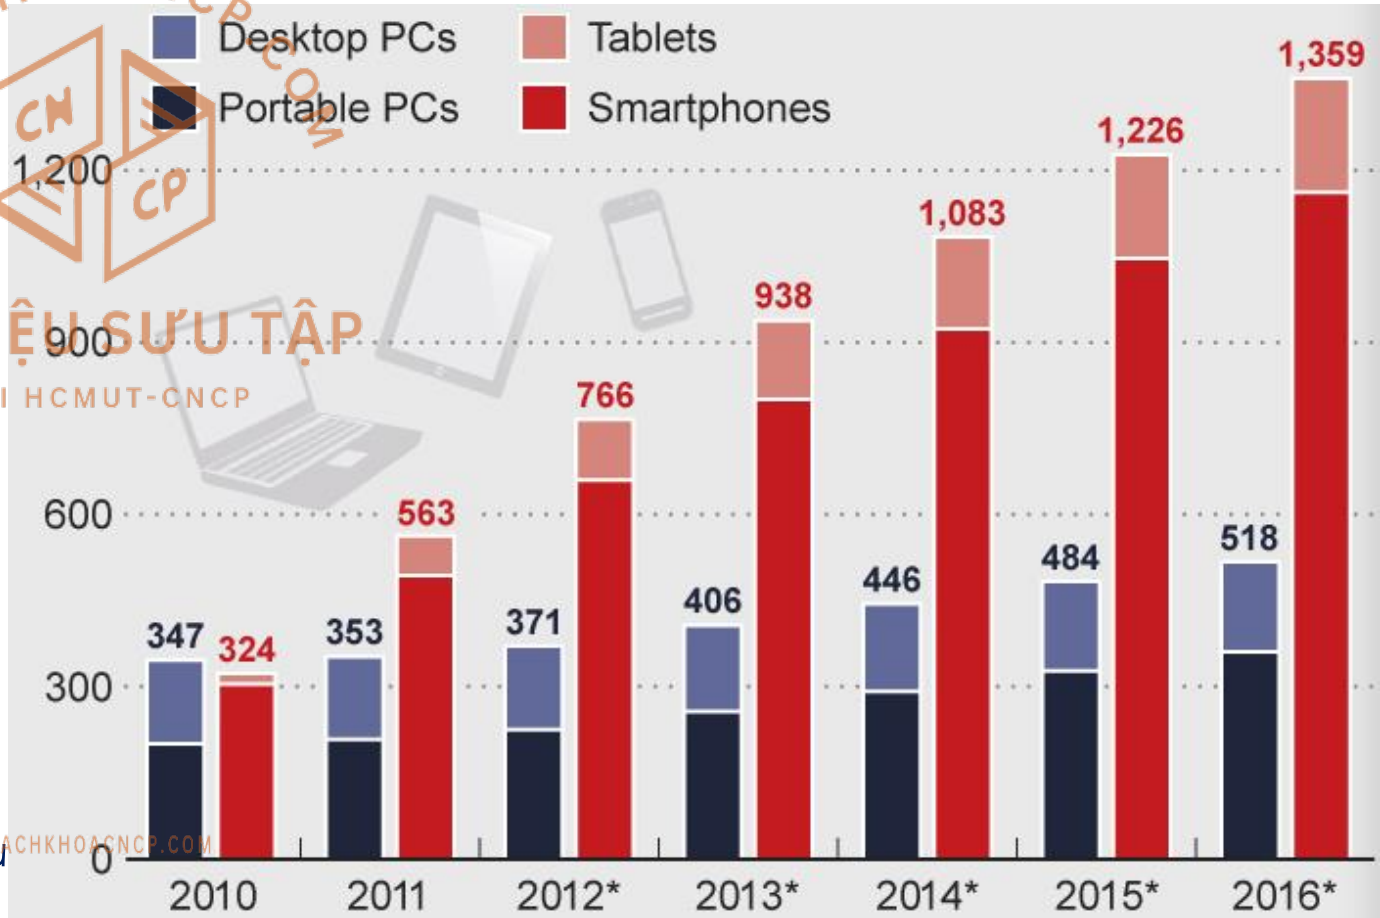

The PostPC Era

- Cloud computing
  - Warehouse Scale Computers (WSC)
  - Software as a Service (SaaS)
  - Portion of software run on a PMD and a portion run in the Cloud
  - Amazon and Google

- Personal Mobile Device (PMD)
  - Battery operated
  - Connects to the Internet
  - Hundreds of dollars
  - Smart phones, tablets, electronic glasses

Understanding Performance

- Algorithm
  - Determines number of operations executed
- Programming language, compiler, architecture
  - Determine number of machine instructions executed per operation
- Processor and memory system
  - Determine how fast instructions are executed
- I/O system (including OS)
  - Determines how fast I/O operations are executed

Below Your Program

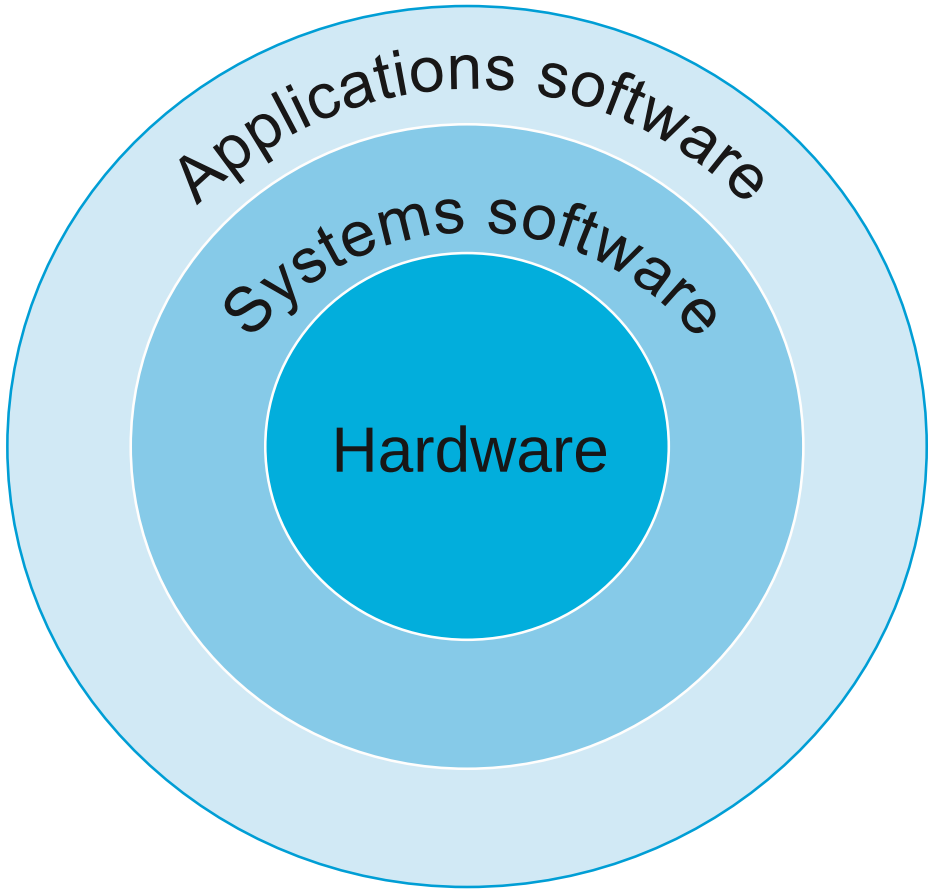

- Application software
  - Written in high-level language
- System software
  - **Compiler**: translates HLL code to machine code
  - **Operating System**: service code
    - Handling input/output
    - Managing memory and storage
    - Scheduling tasks & sharing resources
- Hardware
  - Processor, memory, I/O controllers

Levels of Program Code

- High-level language
  - Level of abstraction closer to problem domain
  - Provides for productivity and portability
- Assembly language
  - Textual representation of instructions
- Hardware representation
  - Binary digits (bits)
  - Encoded instructions and data
- Which layer represents for program.exe/.asm/.c?

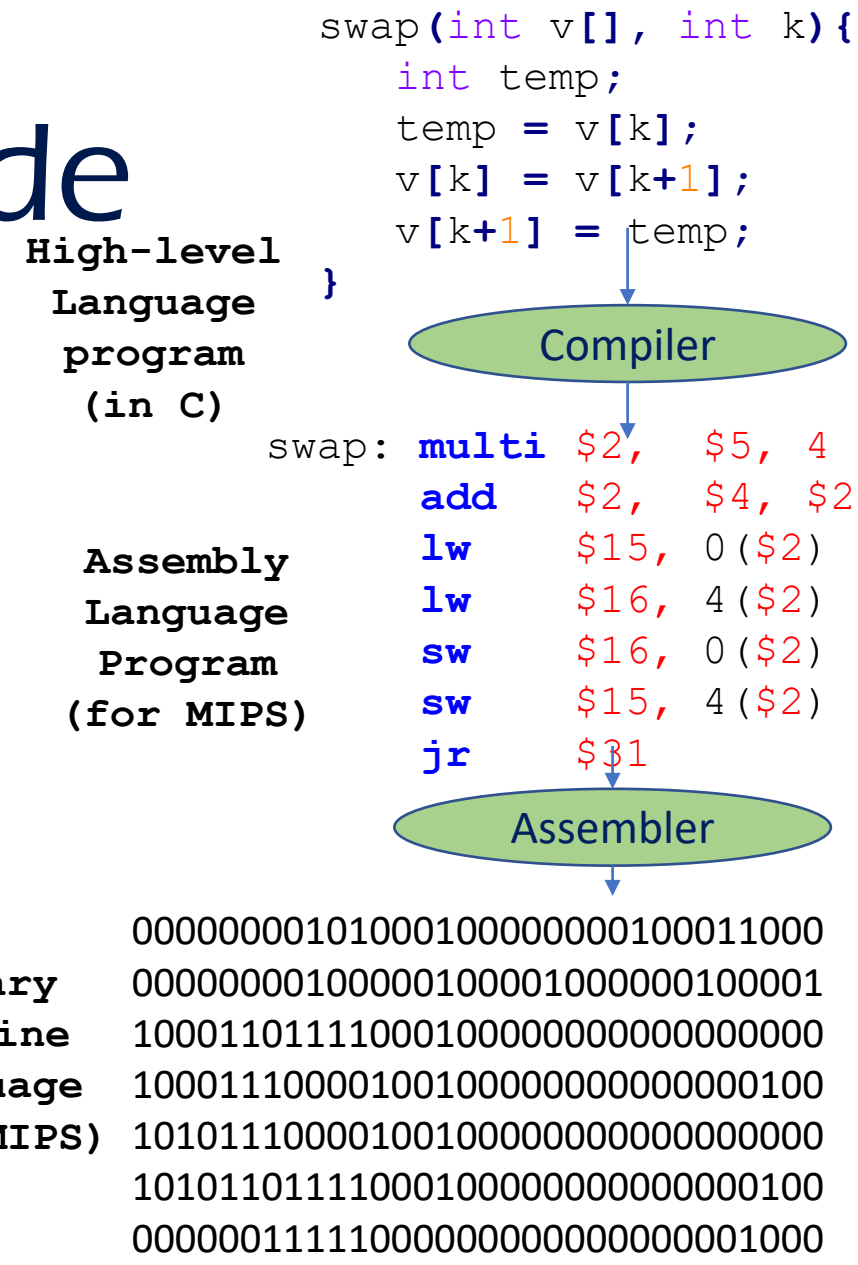

Components of a Computer

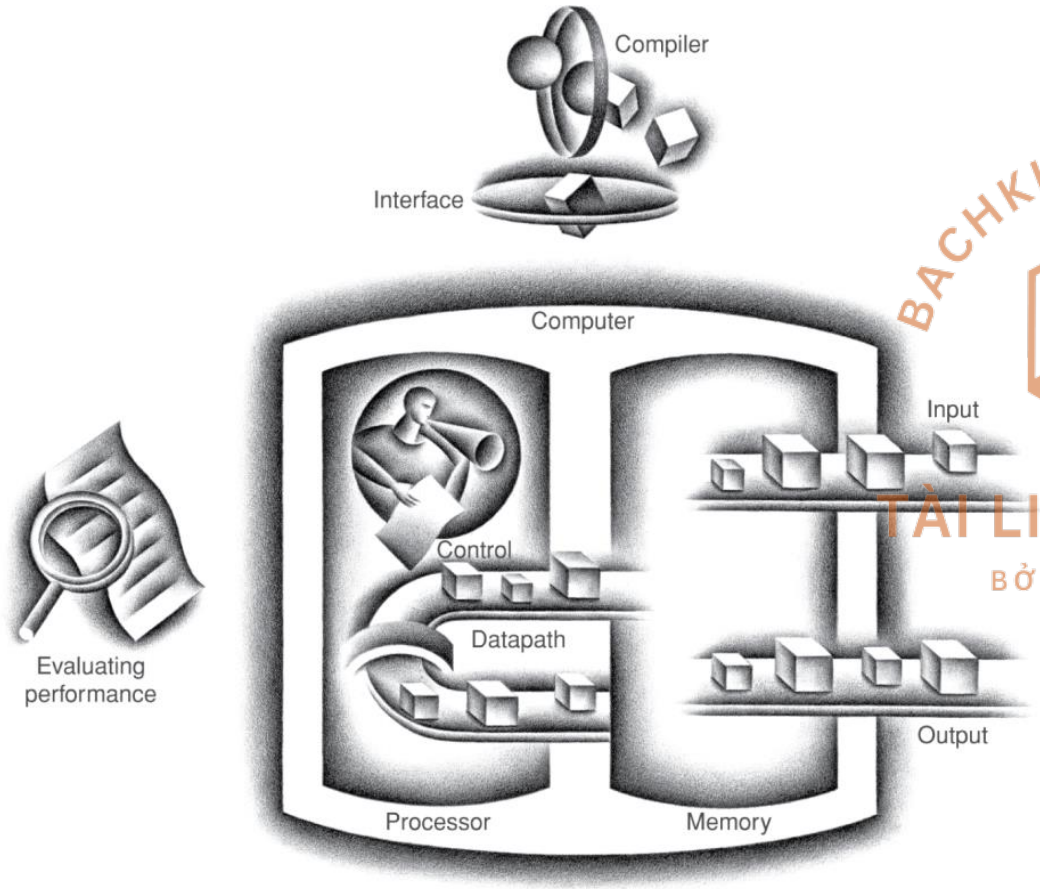

- Same components for all kinds of computer
  - Desktop, server, embedded
- Input/output includes
  - User-interface devices
    - Display, keyboard, mouse
  - Storage devices
    - Hard disk, CD/DVD, flash
  - Network adapters
    - For communicating with other computers

Inside the Processor (CPU)

- Datapath: performs operations on data
- Control: sequences Datapath, memory, ...
- Cache memory
  - Small fast SRAM memory for immediate access to data

Eight Great Ideas

- Design for Moore's Law
- Use abstraction to simplify design
- Make the common case fast
- Performance via parallelism
- Performance via pipelining
- Performance via prediction
- Hierarchy of memories
- Dependability via redundancy

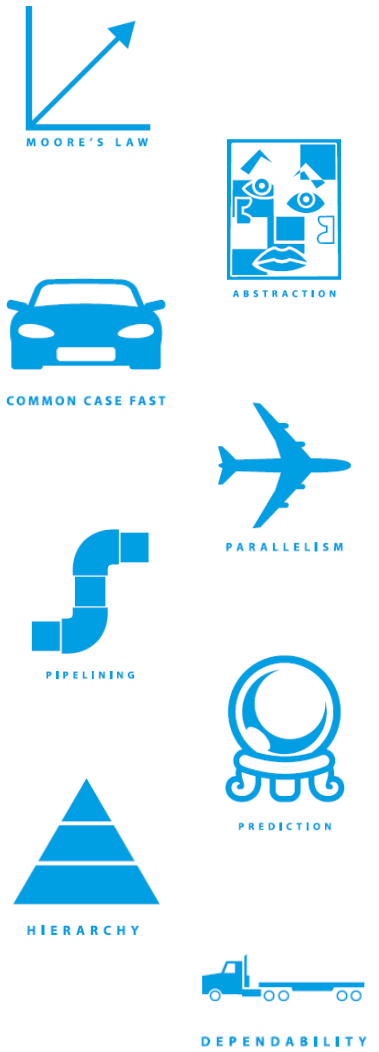

Opening the Box

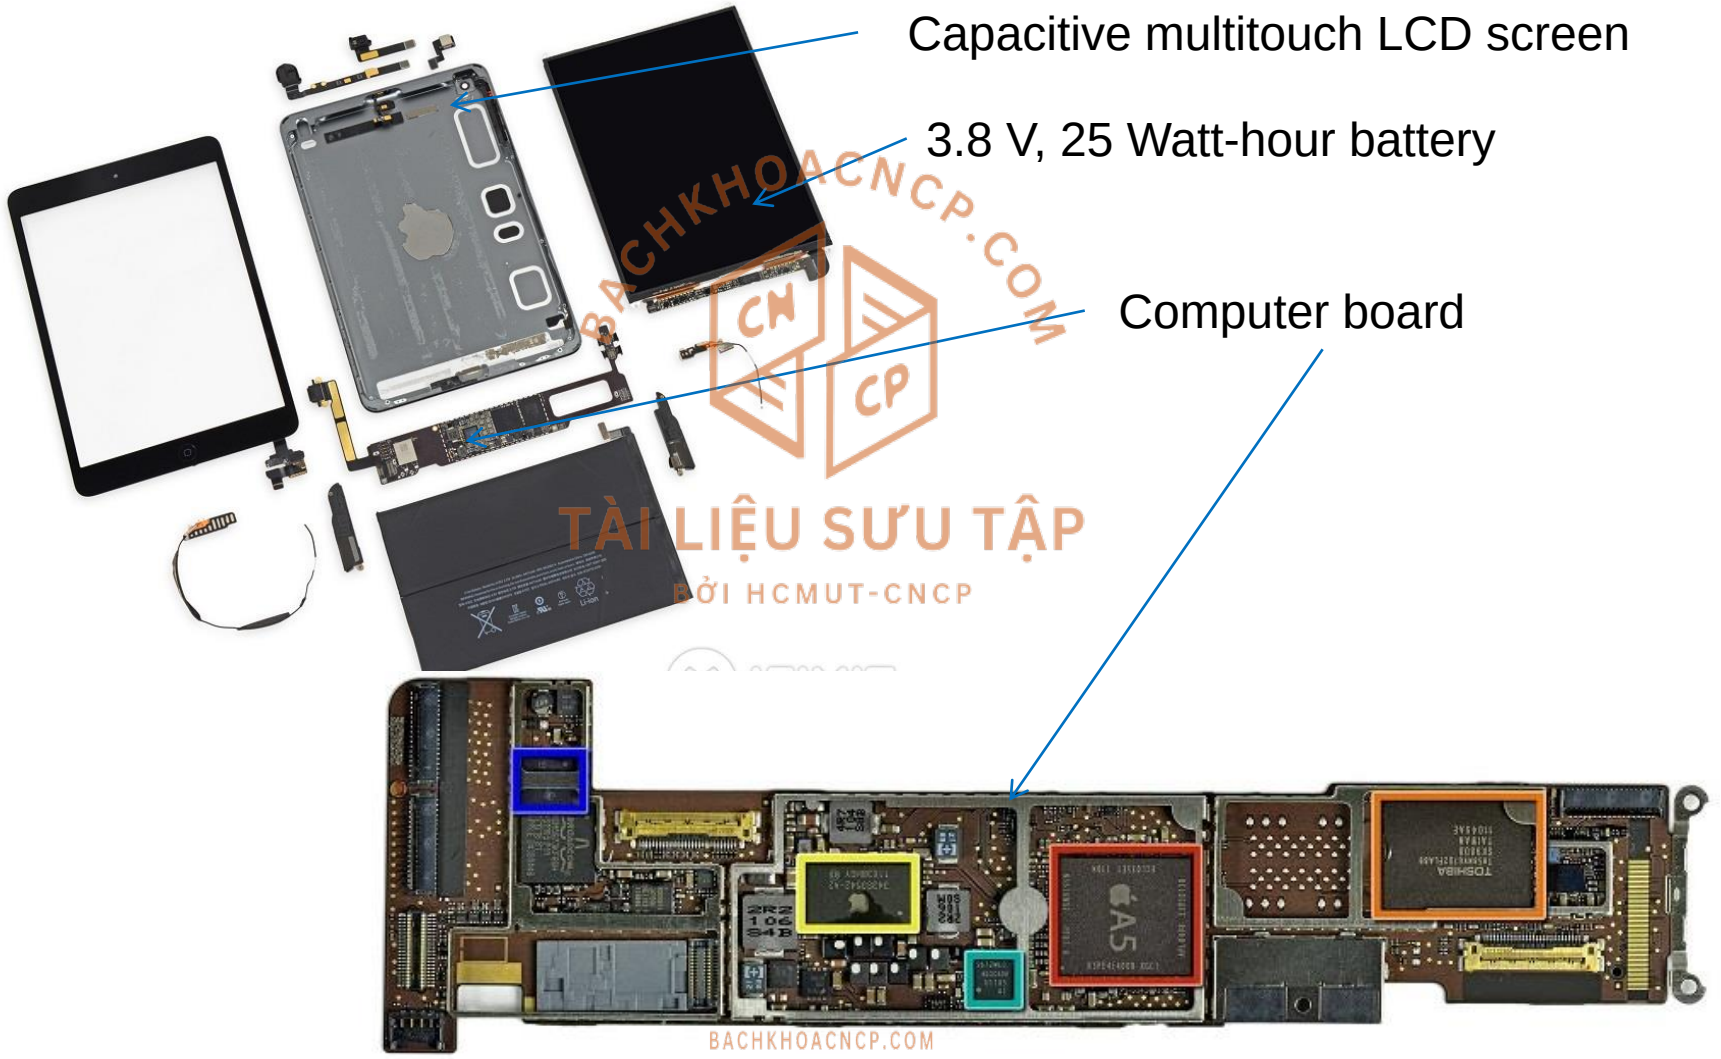

Through the Looking Glass

- LCD screen: picture elements (pixels)
  - Mirrors content of frame buffer memory

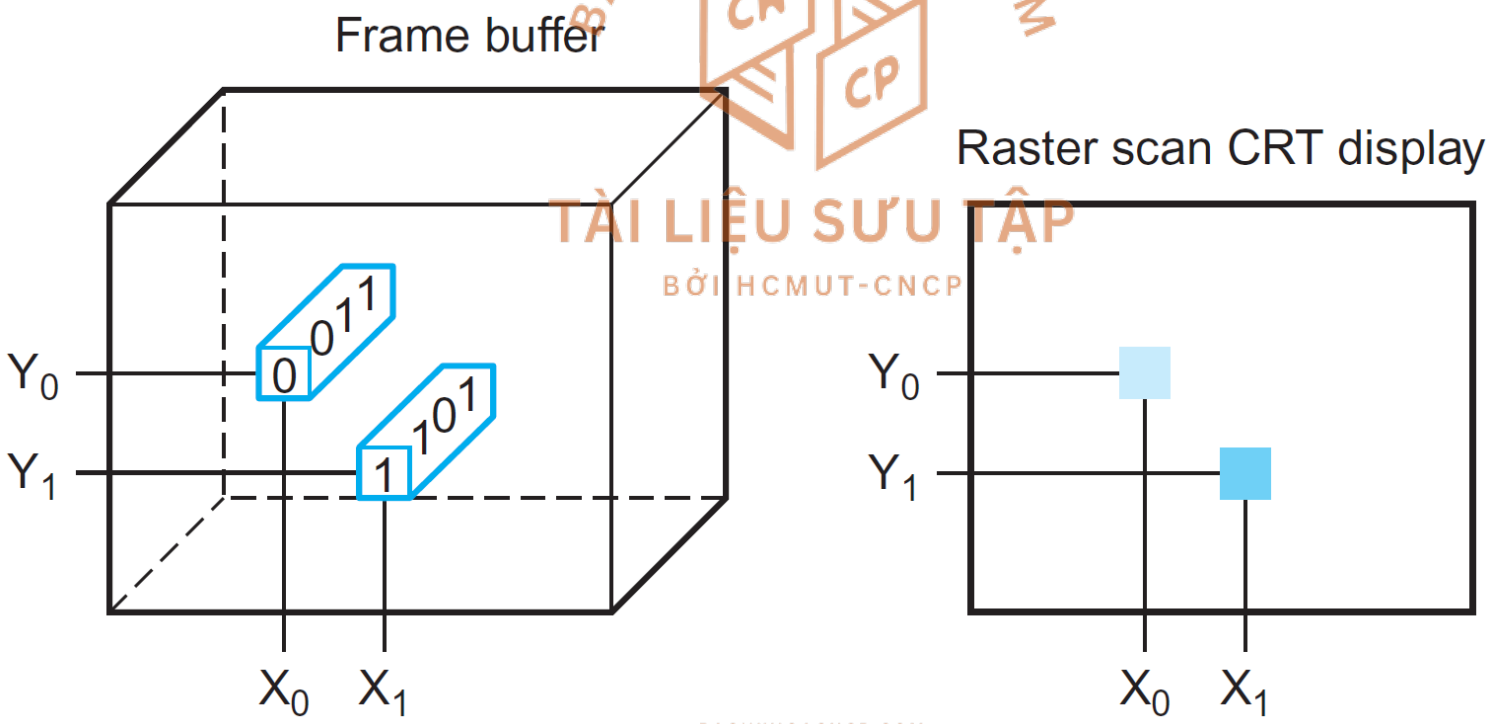

Touchscreen

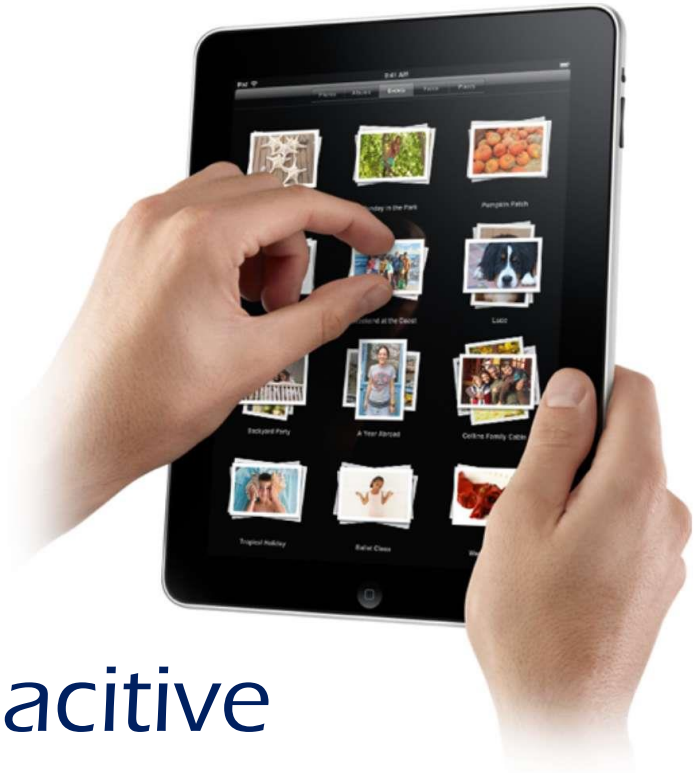

- PostPC device
- Supersedes keyboard and mouse
- Resistive and Capacitive types
  - Most tablets, smart phones use capacitive
  - Capacitive allows multiple touches simultaneously

Inside the Processor

- Apple A14

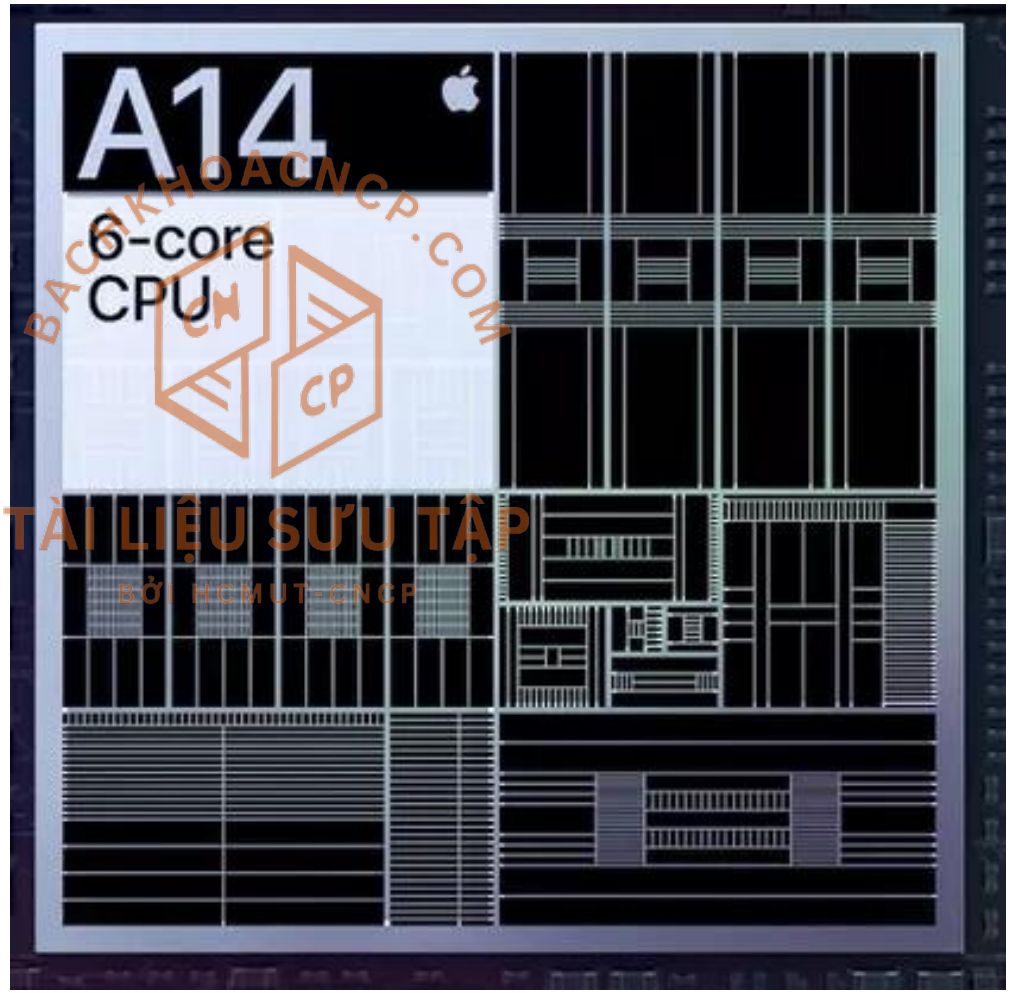

Abstractions

- Abstraction helps us deal with complexity
  - Hide lower-level detail
- Instruction set architecture (ISA)
  - The hardware/software interface
- Application binary interface
  - The ISA plus system software interface
- Implementation
  - The details underlying and interface

A Safe Place for Data

- Volatile main memory
  - Loses instructions and data when power off
- Non-volatile secondary memory
  - SSD, Magnetic disk
  - Flash memory
  - Optical disk (CDROM, DVD)

Networks

- Communication, resource sharing, nonlocal access
- Local area network (LAN): Ethernet
- Wide area network (WAN): the Internet
- Wireless network: WiFi, Bluetooth

Technology Trends

- Electronics technology continues to evolve
  - Increased capacity and performance
  - Reduced cost

Year	Technology	Relative performance/cost
1951	Vacuum tube	1
1965	Transistor	35
1975	Integrated circuit (IC)	900
1995	Very large scale IC (VLSI)	2,400,000
2013	Ultra large scale IC	250,000,000,000

Semiconductor Technology

- Silicon: semiconductor
- Add materials to transform properties:
  - Conductors
  - Insulators
  - Switch

Manufacturing ICs

- Yield: proportion of working dies per wafer

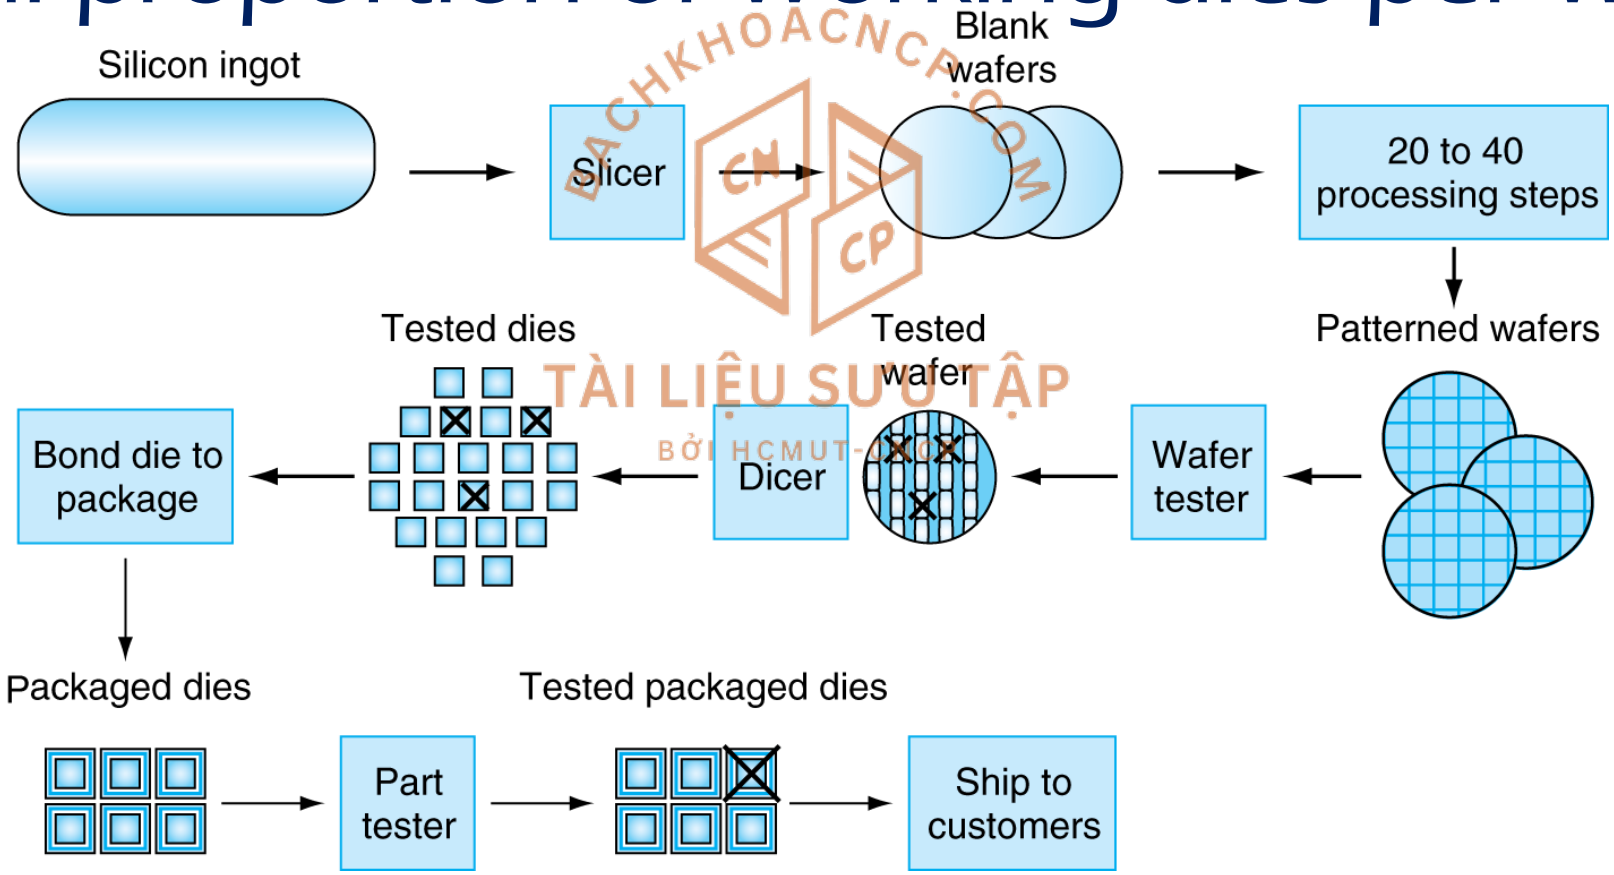

Intel Core i7 Wafer

- 300mm wafer, 280 chips, 32nm technology
- Each chip is 20.7 x 10.5 mm

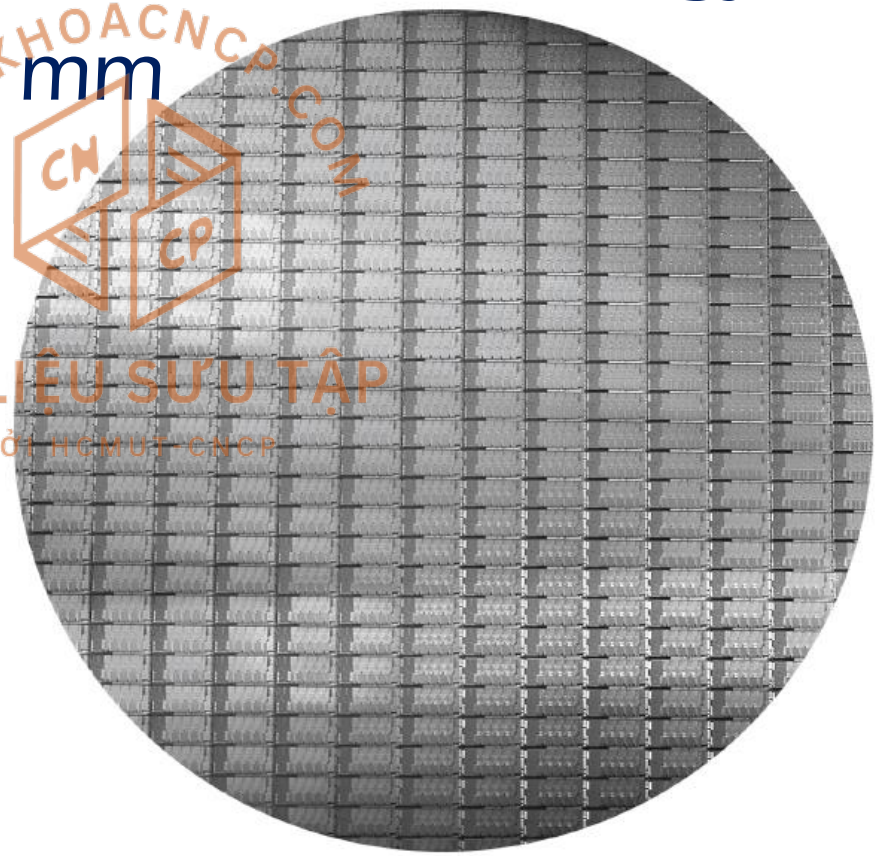

Integrated Circuit Cost

- Nonlinear relation to area and defect rate
  - Wafer cost and area are fixed
  - Defect rate determined by manufacturing process
  - Die area determined by architecture and circuit design

$$\text{Cost per die} = \frac{\text{Cost per wafer}}{\text{Dies per wafer} \times \text{Yield}}$$

$$\text{Dies per wafer} \approx \text{Wafer area} / \text{Die area}$$

$$\text{Yield} = \frac{1}{(1 + (\text{Defects per area} \times \text{Die area}/2))^2}$$

Defining Performance

- Which airplane has the best performance?

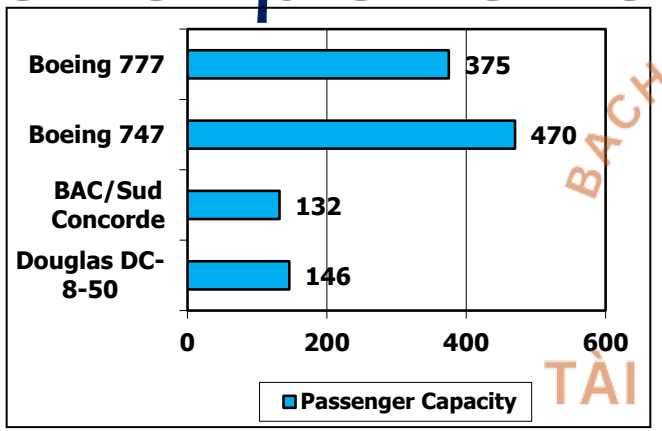

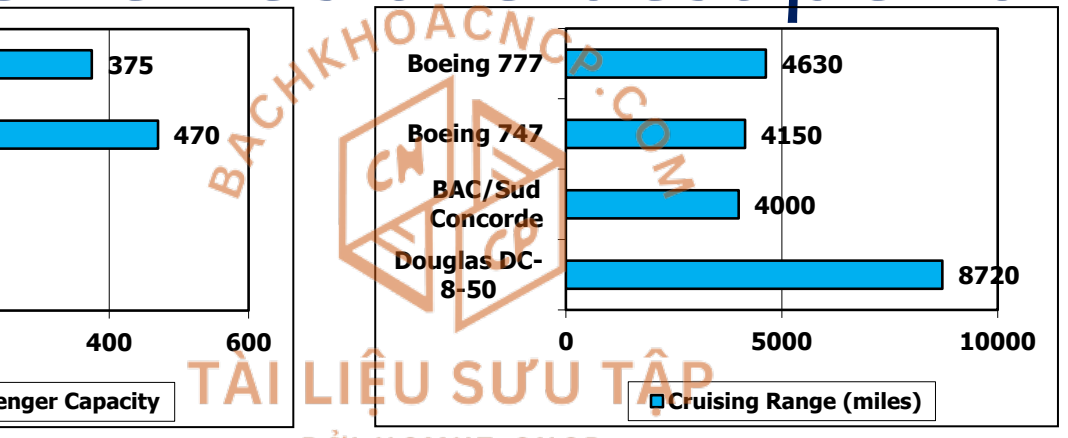

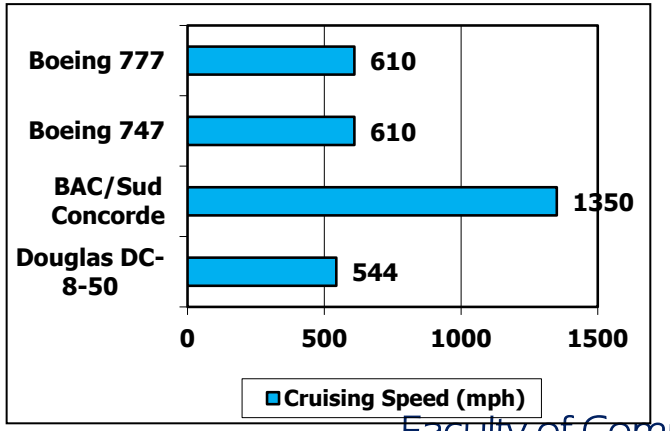

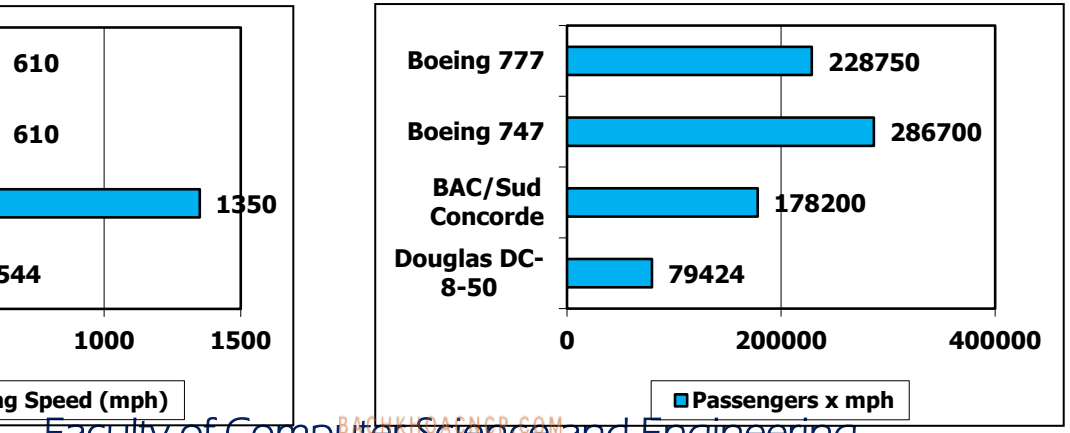

Response Time and Throughput

- Response time
  - How long it takes to do a task
- Throughput
  - Total work done per unit time
    - e.g., tasks/transactions/... per hour
- How are response time and throughput affected by
  - Replacing the processor with a faster version?
  - Adding more processors?
- We'll focus on response time for now...

Relative Performance

- Define: Performance = 1/Execution Time
- "X is n time faster than Y"

$$\text{Performance}_X / \text{Performance}_Y = \text{Execution time}_Y / \text{Execution time}_X = n$$

- Example: time taken to run a program
  - 10s on A, 15s on B
  - Execution TimeB / Execution TimeA = 15s / 10s = 1.5
  - So, A is 1.5 times faster than B

Measuring Execution Time

- Elapsed time
  - Total response time, including all aspects
    - Processing, I/O, OS overhead, idle time
  - Determines system performance
- CPU time
  - Time spent processing a given job
    - Discounts I/O time, other jobs' shares
  - Comprises user CPU time and system CPU time
  - Different programs are affected differently by CPU and system performance

CPU Clocking

- Operation of digital hardware governed by a constant-rate clock

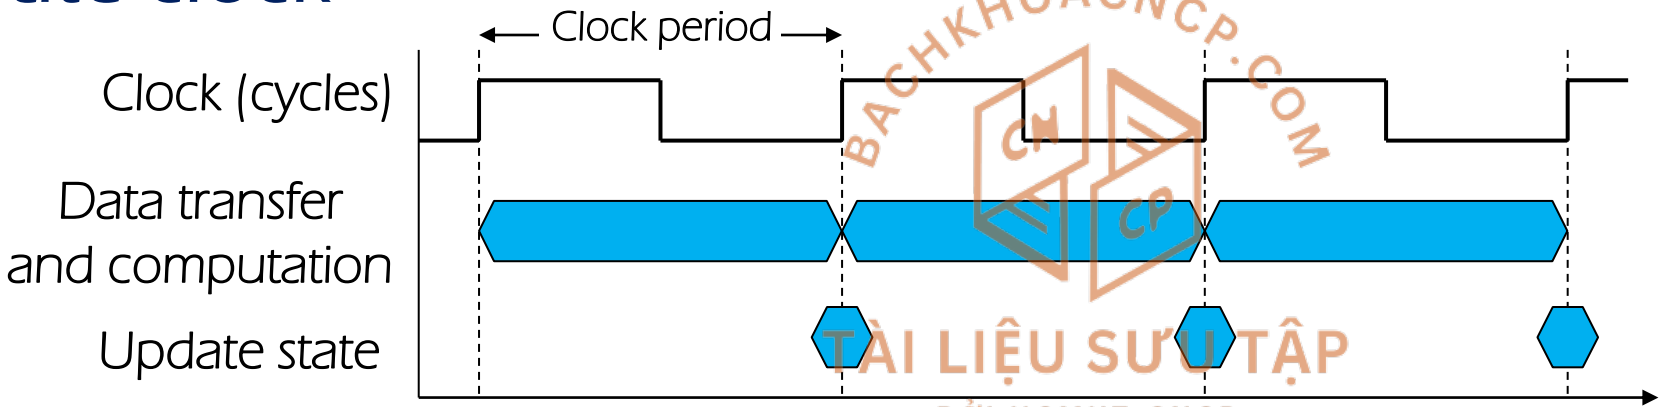

- Clock period: duration of a clock cycle
  - e.g., 250ps = 0.25ns = 250×10^{-12}s
- Clock frequency (rate): cycles per second
  - e.g., 4.0GHz = 4000MHz = 4.0×10^{9}Hz

CPU Time

- Performance improved by
  - Reducing number of clock cycles
  - Increasing clock rate
  - Hardware designer must often trade off clock rate against cycle count

$$\text{CPU Time} = \text{CPU Clock Cycles} \times \text{Clock Cycle Time}$$

$$= \frac{\text{CPU Clock Cycles}}{\text{Clock Rate}}$$

CPU Time Example

- Computer A: 2GHz clock, 10s CPU time
- Designing Computer B
  - Aim for 6s CPU time
  - Can do faster clock, but causes 1.2 × clock cycles
- How fast must Computer B clock be?

$$\text{Clock Rate}_B = \frac{\text{Clock Cycles}_B}{\text{CPU Time}_B} = \frac{1.2 \times \text{Clock Cycles}_A}{6\text{s}}$$

$$\text{Clock Cycles}_A = \text{CPU Time}_A \times \text{Clock Rate}_A$$

$$= 10\text{s} \times 2\text{GHz} = 20 \times 10^9$$

$$\text{Clock Rate}_B = \frac{1.2 \times 20 \times 10^9}{6\text{s}} = \frac{24 \times 10^9}{6\text{s}} = 4\text{GHz}$$

Instruction Count and CPI

- Instruction Count for a program
  - Determined by program, ISA and compiler
- Average cycles per instruction
  - Determined by CPU hardware
  - If different instructions have different CPI
    - Average CPI affected by instruction mix

$$\text{Clock Cycles} = \text{Instruction Count} \times \text{Cycles per Instruction}$$

$$\text{CPU Time} = \text{Instruction Count} \times \text{CPI} \times \text{Clock Cycle Time}$$

$$= \frac{\text{Instruction Count} \times \text{CPI}}{\text{Clock Rate}}$$

CPI Example

- Computer A: Cycle Time = 250ps, CPI = 2.0
- Computer B: Cycle Time = 500ps, CPI = 1.2
- Same ISA
- Which is faster, and by how much?

$$\text{CPU Time}_A = \text{Instruction Count} \times \text{CPI}_A \times \text{Cycle Time}_A$$
$$= I \times 2.0 \times 250\text{ps} = I \times 500\text{ps}$$

A is faster…

$$\text{CPU Time}_B = \text{Instruction Count} \times \text{CPI}_B \times \text{Cycle Time}_B$$
$$= I \times 1.2 \times 500\text{ps} = I \times 600\text{ps}$$

$$\frac{\text{CPU Time}_B}{\text{CPU Time}_A} = \frac{I \times 600\text{ps}}{I \times 500\text{ps}} = 1.2$$

…by this much

CPI in More Detail

- If different instruction classes take different numbers of cycles

$$\text{Clock Cycles} = \sum_{i=1}^{n} (\text{CPI}_i \times \text{Instruction Count}_i)$$

- Weighted average CPI

$$\text{CPI} = \frac{\text{Clock Cycles}}{\text{Instruction Count}} = \sum_{i=1}^{n} \left(\text{CPI}_i \times \frac{\text{Instruction Count}_i}{\text{Instruction Count}} \right)$$

Relative frequency

CPI Example

- Alternative compiled code sequences using instructions in classes A, B, C

Class	A	B	C
CPI for class	1	2	3
IC in sequence 1	2	1	2
IC in sequence 2	4	1	1

- Sequence 1: IC = 5
  - Clock Cycles
    = 2×1 + 1×2 + 2×3
    = 10
  - Avg. CPI = 10/5 = 2.0
- Sequence 2: IC = 6
  - Clock Cycles
    = 4×1 + 1×2 + 1×3
    = 9
  - Avg. CPI = 9/6 = 1.5

Performance Summary

- Performance depends on
  - Algorithm: affects IC, possibly CPI
  - Programming language: affects IC, CPI
  - Compiler: affects IC, CPI
  - Instruction set architecture: affects IC, CPI, Tc

$$\text{CPU Time} = \frac{\text{Instructions}}{\text{Program}} \times \frac{\text{Clock cycles}}{\text{Instruction}} \times \frac{\text{Seconds}}{\text{Clock cycle}}$$

Power Trends

- In CMOS IC technology

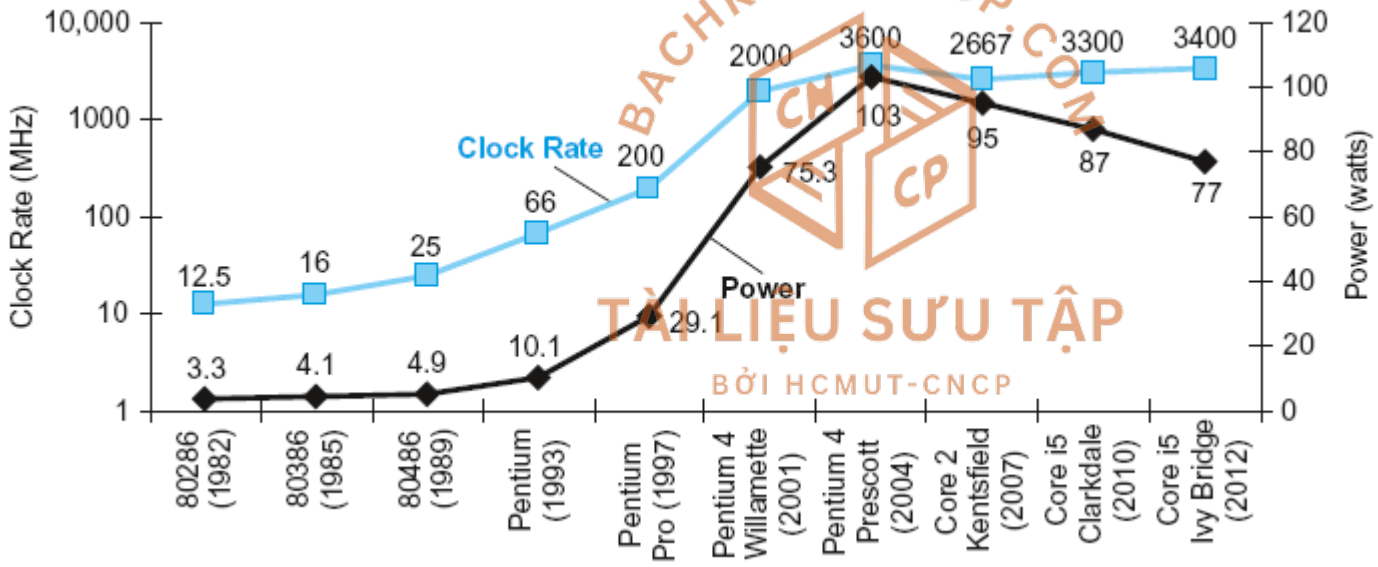

$$\text{Power} = \text{Capacitive load} \times \text{Voltage}^2 \times \text{Frequency}$$

×30

5V → 1V

×1000

Multiprocessors

- Multicore microprocessors
  - More than one processor per chip
- Requires explicitly parallel programming
  - Compare with instruction level parallelism
    - Hardware executes multiple instructions at once
    - Hidden from the programmer
  - Hard to do
    - Programming for performance
    - Load balancing
    - Optimizing communication and synchronization

SPEC CPU Benchmark

- **Programs used to measure performance**
  - Supposedly typical of actual workload
- Standard Performance Evaluation Corp (SPEC)
  - Develops benchmarks for CPU, I/O, Web, …
- SPEC CPU2006
  - Elapsed time to execute a selection of programs
    - Negligible I/O, so focuses on CPU performance
  - Normalize relative to reference machine
  - Summarize as geometric mean of performance ratios
    - CINT2006 (integer) and CFP2006 (floating-point)

$$\sqrt[n]{\prod_{i=1}^{n} \text{Execution time ratio}_i}$$

SPEC Power Benchmark

- Power consumption of server at different workload levels
  - Performance: ssj_ops/sec
  - Power: Watts (Joules/sec)

$$\text{Overall ssj\_opsper Watt} = \left(\sum_{i=0}^{10} \text{ssj\_ops}_i\right) \Big/ \left(\sum_{i=0}^{10} \text{power}_i\right)$$

Pitfall: Amdahl's Law

- Improving an aspect of a computer and expecting a proportional improvement in overall performance

$$T_{improved} = \frac{T_{affected}}{improvement\ factor} + T_{unaffected}$$

- Example: multiply accounts for 80s/100s
  - How much improvement in multiply performance to get 5× overall?

$$20 = \frac{80}{n} + 20$$

  - Can't be done!
- Corollary: make the common case fast

Pitfall: MIPS as a Performance Metric

- MIPS: Millions of Instructions Per Second
  - Doesn't account for
    - Differences in ISAs between computers
    - Differences in complexity between instructions

$$\text{MIPS} = \frac{\text{Instruction count}}{\text{Execution time} \times 10^6}$$

$$= \frac{\text{Instruction count}}{\frac{\text{Instruction count} \times \text{CPI}}{\text{Clock rate}} \times 10^6} = \frac{\text{Clock rate}}{\text{CPI} \times 10^6}$$

  - CPI varies between programs on a given CPU

Reducing Power

- Suppose a new CPU has
  - 85% of capacitive load of old CPU
  - 15% voltage and 15% frequency reduction

$$\frac{P_{new}}{P_{old}} = \frac{C_{old} \times 0.85 \times (V_{old} \times 0.85)^2 \times F_{old} \times 0.85}{C_{old} \times V_{old}^{\ 2} \times F_{old}} = 0.85^4 = 0.52$$

- The power wall
  - We can't reduce voltage further
  - We can't remove more heat
- How else can we improve performance?

Concluding Remarks

- Cost/performance is improving
  - Due to underlying technology development
- Hierarchical layers of abstraction
  - In both hardware and software
- Instruction set architecture
  - The hardware/software interface
- Execution time: the best performance measure
- Power is a limiting factor
  - Use parallelism to improve performance

Exercise

- Given a program X in detail as below.

Instruction class	A	B	C	D
CPI	2	4	3	2.5
# instruction	1000	2000	3000	4000

- What is CPU time of X where it is run at 2Ghz ?
- Improving performance by reducing #instruction of B by a half. What is the speed up?
- To improve performance by changing only 1 class of instruction. What is the limitation of speed up?