




MEHEJ
INDUSTRIES

Fastening the Future

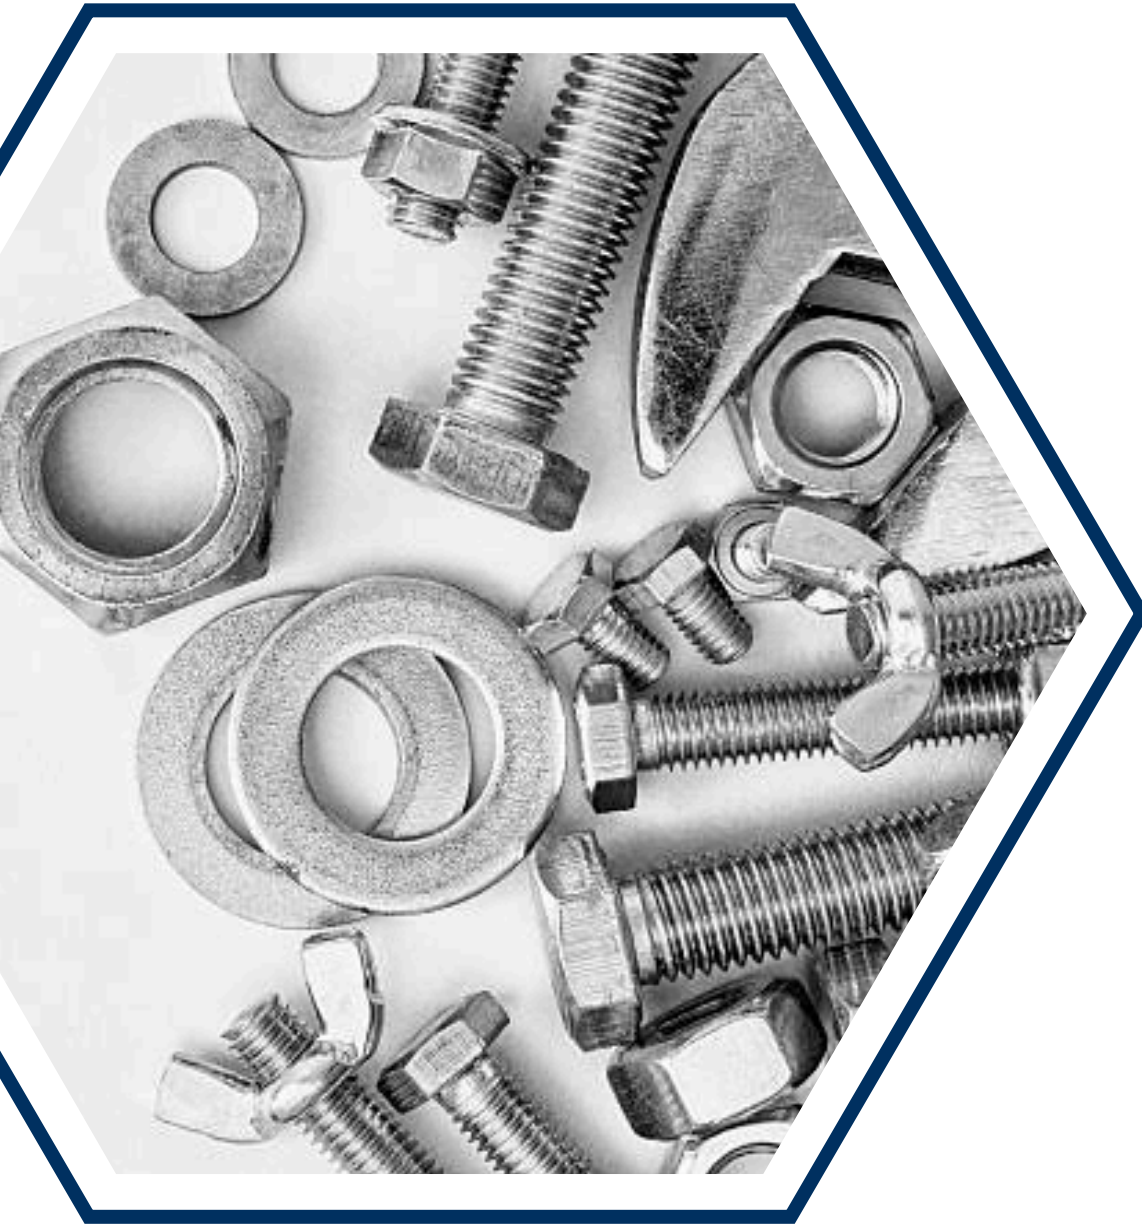

info@mehejindustries.com



www.mehejindustries.com



+91 9819933344



Lock Washers :

Internal Tooth Lock & External Tooth Lock

Lock washers are specially designed washers used to prevent loosening of fasteners due to vibration, dynamic loads, or torque loss. They work by creating resistance through spring tension, serrations, or teeth, which bite into the mating surface and maintain preload in the assembly.

In simple terms, a lock washer ensures that nuts and bolts stay tight and secure over time, even under movement or stress.

Specification of Lock Washer:

- Dimension: ASTM, DIN, BS, IS and all International Standards
- Inner Diameter (ID): As per bolt size (M3 to M100+)
- Outer Diameter (OD): Standard & Custom sizes
- Thickness: Light, medium, and heavy series / Custom sizes
- Locking Type: Split, toothed, serrated, wedge lock
- Finish / Coating: Zinc Plated, Hot Dip Galvanized, Black Oxide, Phosphate, Plain, etc.
- Heat Treatment: Hardened & Tempered

Material Available : Carbon Steel , Alloy Steel , Stainless Steel (SS 202 , SS 304, SS 316, etc.) , Brass , Copper , Aluminum , Nylon / Plastic (for insulation applications)

Application :

- Construction & Infrastructure
- Automotive Industry
- Aerospace Industry
- Shipbuilding & Marine
- Oil & Gas Industry
- Heavy Machinery Manufacturing






MEHEJ
INDUSTRIES
Fastening the Future

DIN 6797 (A)

EXTERNAL TOOTH LOCK WASHERS

DIMENSIONS & SPECIFICATIONS

DIN 6797 (A) external tooth lock washers are used to prevent loosening of bolts, screws and nuts caused by vibration or dynamic loads. The external teeth bite into the bearing surface and provide a reliable locking action.

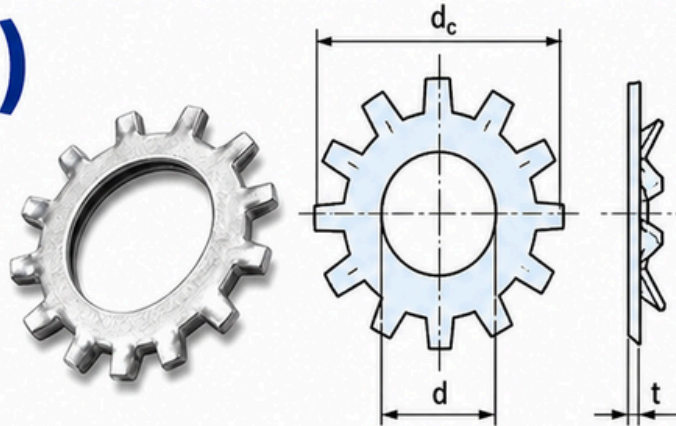

d – Nominal thread diameter (inner dia.)

d_c – Outside diameter

t – Thickness (unloaded)

Number of Teeth –
Number of external teeth

per 1000 units≈kg –
Approximate weight

Size (d)		1.7	2.2	2.7	3.2	3.7	4.3	5.3	6.4	7.4	8.4
d	min=nominal size	1.7	2.2	2.7	3.2	3.7	4.3	5.3	6.4	7.4	8.4
	max	1.84	2.34	2.84	3.38	3.88	4.48	5.48	6.62	7.62	8.62
d_c	max=nominal size	3.6	4.5	5.5	6	7	8	10	11	12.5	15
	min	3.3	4.2	5.2	5.7	6.64	7.64	9.64	10.57	12.07	14.57
t		0.3	0.3	0.4	0.4	0.5	0.5	0.6	0.7	0.8	0.8
Number of Teeth		6	6	6	6	6	8	8	8	8	8
per 1000 units≈kg		0.01	0.025	0.04	0.045	0.075	0.095	0.18	0.22	0.3	0.45
For Nominal Thread Diameter		M1.6	M2	M2.5	M3	M3.5	M4	M5	M6	M7	M8

Size (d)		10.5	13	15	17	19	21	23	25	28	31
d	min=nominal size	10.5	13	15	17	19	21	23	25	28	31
	max	10.77	13.27	15.27	17.27	19.33	21.33	23.33	25.33	28.33	31.39
d_c	max=nominal size	18	20.5	24	26	30	33	36	38	44	48
	min	17.57	19.98	23.48	25.48	29.48	32.38	35.38	37.38	43.38	47.38
t		0.9	1	1	1.2	1.4	1.4	1.5	1.5	1.6	1.6
Number of Teeth		9	10	10	12	12	12	14	14	14	14
per 1000 units≈kg		0.8	1.0	1.6	2.0	3.5	3.8	5	6	8	9
For Nominal Thread Diameter		M10	M12	M14	M16	M18	M20	M22	M24	M27	M30

NOTES

- All dimensions in millimeters (mm).
- Values are non-preferred sizes as per DIN.
- Washer material: Spring steel.
- Surface finish: Zinc plated or as required.



DIN 6797 (A)

EXTERNAL TOOTH LOCK WASHERS

QUALITY • RELIABILITY • PERFORMANCE



STANDARD

DIN 6797 (A) – External Tooth Lock Washers



MATERIAL

Spring steel to DIN EN 10270-3



FINISH

Zinc plated (other finishes available).



info@mehejindustries.com



www.mehejindustries.com



+91 9819933344




MEHEJ
INDUSTRIES
Fastening the Future

DIN 6797 (J)

INTERNAL TOOTH LOCK WASHERS

DIMENSIONS & SPECIFICATIONS

DIN 6797 (J) internal tooth lock washers are used to prevent loosening of bolts, screws and nuts caused by vibration or dynamic loads. The internal teeth bite into the fastener head or nut bearing surface to provide a secure locking action.

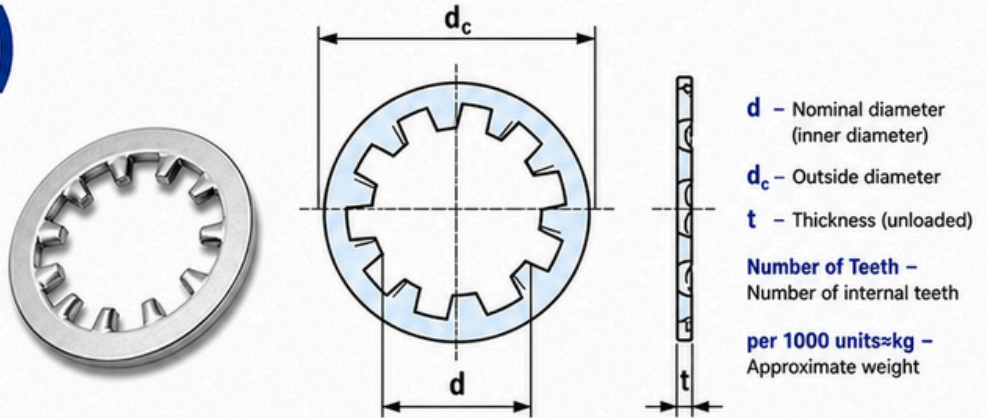

Size		2.2	2.7	3.2	3.7	4.3	5.3	6.4	7.4	8.4	10.5
d	min=nominal size	2.2	2.7	3.2	3.7	4.3	5.3	6.4	7.4	8.4	10.5
	max	2.34	2.84	3.38	3.88	4.48	5.48	6.62	7.62	8.62	10.77
d _c	max=nominal size	4.5	5.5	6	7	8	10	11	12.5	15	18
	min	4.2	5.2	5.7	6.64	7.64	9.64	10.57	12.07	14.57	17.57
t		0.3	0.4	0.4	0.5	0.5	0.6	0.7	0.8	0.8	0.9
Number of Teeth		6	6	6	6	8	8	8	8	8	9
per 1000 units≈kg		0.04	0.045	0.045	0.085	0.1	0.2	0.25	0.35	0.55	0.9
For Nominal Thread Diameter		M2	M2.5	M3	M3.5	M4	M5	M6	M7	M8	M10

Size		13	15	17	19	21	23	25	28	31
d	min=nominal size	13	15	17	19	21	23	25	28	31
	max	13.27	15.27	17.27	19.33	21.33	23.33	25.33	28.33	31.39
d _c	max=nominal size	20.5	24	26	30	33	36	38	44	48
	min	19.98	23.48	25.48	29.48	32.38	35.38	37.38	43.38	47.38
t		1	1	1.2	1.4	1.4	1.5	1.5	1.6	1.6
Number of Teeth		10	10	12	12	12	14	14	14	14
per 1000 units≈kg		1.2	1.9	2.4	3.7	4.1	6	6.5	8.5	9.5
For Nominal Thread Diameter		M12	M14	M16	M18	M20	M22	M24	M27	M30

NOTES

- All dimensions in millimeters (mm).
- Values are non-preferred sizes as per DIN.
- Washer material: Spring steel.
- Surface finish: Zinc plated or as required.



DIN 6797 (J)
INTERNAL TOOTH LOCK WASHERS

QUALITY • RELIABILITY • PERFORMANCE



STANDARD
DIN 6797 (J) – Internal Tooth Lock Washers



MATERIAL
Spring steel to DIN EN 10270-3



FINISH
Zinc plated (other finishes available).



info@mehejindustries.com



www.mehejindustries.com



+91 9819933344