




MEHEJ
INDUSTRIES

Fastening the Future

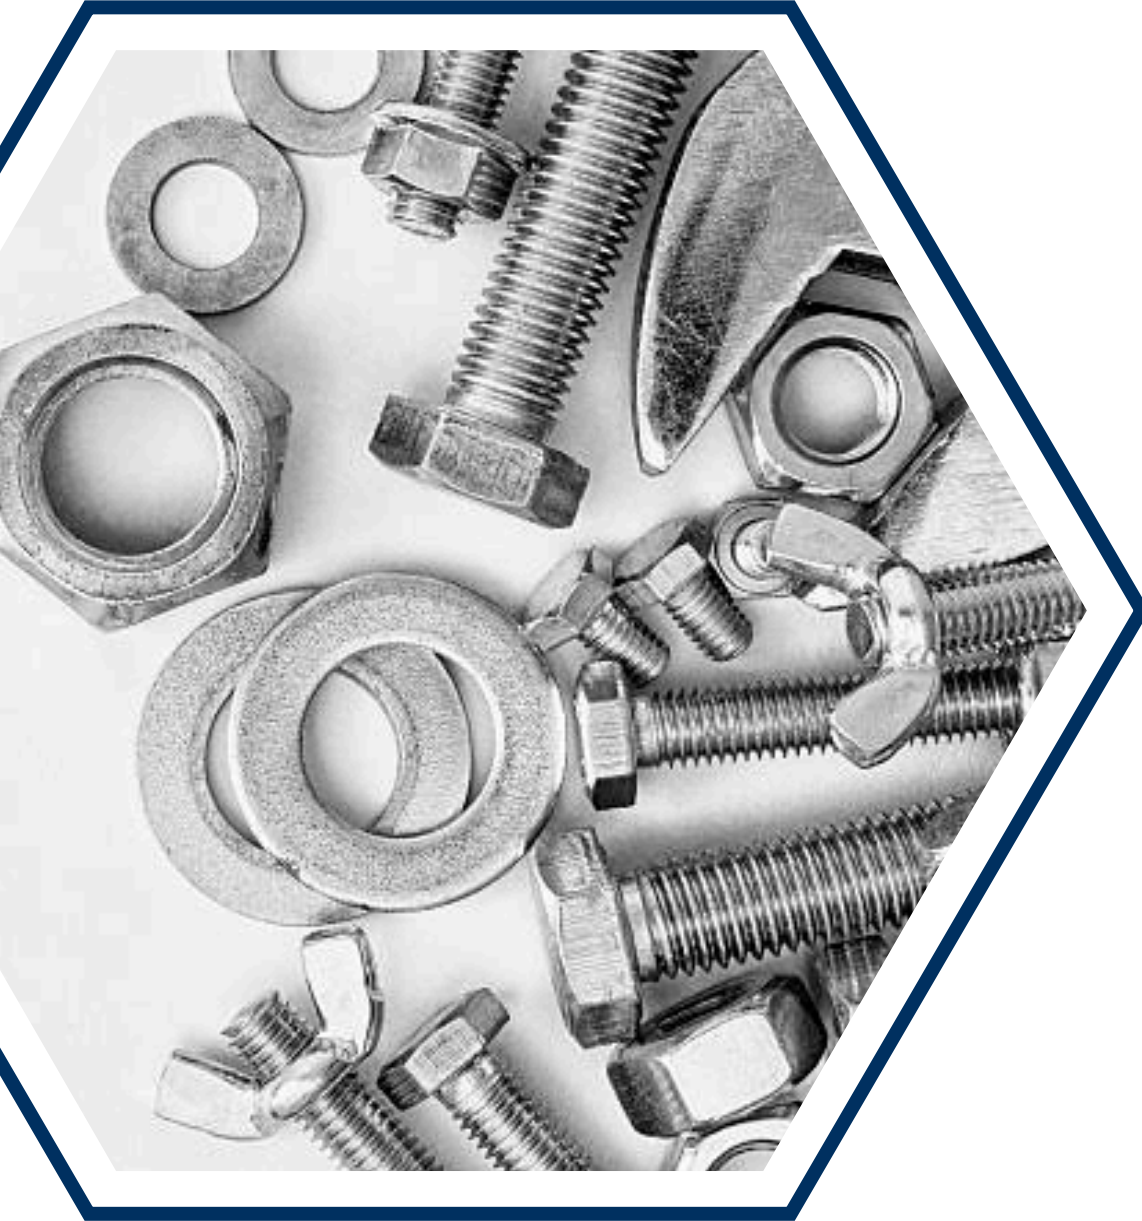

info@mehejindustries.com



www.mehejindustries.com



+91 9819933344

Tab Washers

Tab washers are specialized locking washers designed with one or more protruding tabs that can be bent to secure a nut or bolt in position. One tab typically fits into a keyway or slot, while the other tab(s) are bent against the flat of a nut or bolt to prevent rotation and loosening.

They provide a positive mechanical locking system, making them highly reliable in applications subject to vibration or movement.



Specification of Tab Washer:

- Dimension: ASTM, DIN, BS, IS and all International Standards
- Inner Diameter (ID): As per shaft/bolt size (M3 to M100+)
- Outer Diameter (OD): Standard & Custom sizes
- Thickness: As per application / Custom sizes
- Locking Method: Bendable tabs / Key locking
- Finish / Coating: Zinc Plated, Hot Dip Galvanized, Black Oxide, Phosphate, Plain, etc.
- Heat Treatment: As required for strength and durability

Material Available : Carbon Steel , Alloy Steel , Stainless Steel (SS 202 , SS 304, SS 316, etc.) , Brass , Copper , Aluminum , Nylon / Plastic (for insulation applications)

Application :

- Automotive & Transmission Systems
- Gear Assemblies
- Railway & Heavy Equipment
- Aerospace Industry
- Machinery & Rotating Equipment
- Marine Application







MEHEJ
INDUSTRIES
Fastening the Future

DIN 93 TAB WASHERS

DIMENSIONS & SPECIFICATIONS

Tab washers are used to lock nuts and bolts in position by bending the tab into a slot or against a flat surface, preventing rotation and loosening caused by vibration.

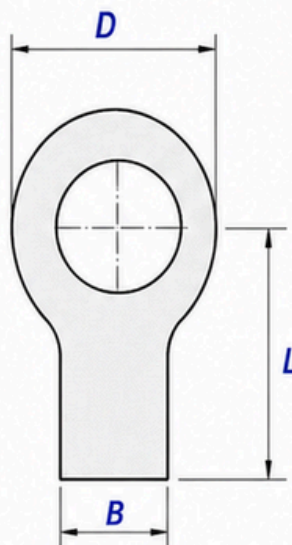

d – For thread diameter
 B – Tab width
 D – Outside diameter
 L – Tab length
 h – Thickness

Unit: mm

Unit: mm

For thread diameter	M3 ①	M3.5 ①	M4 ①	M5	M6	M7	M8	M10	M12	M14	M16	M18
d	3.2	3.7	4.3	5.3	6.4	7.4	8.4	10.5	13	15	17	19
B	4	4	5	6	7	7	8	10	12	12	15	18
D	12	12	14	17	19	19	22	26	30	33	36	40
L	13	13	14	16	18	18	20	22	28	28	32	36
h ①	0.38	0.38	0.38	0.50	0.50	0.50	0.75	0.75	1.00	1.00	1.00	1.00
per 1000 units ≈ kg	0.368	0.356	0.487	1.05	1.21	1.17	2.32	3.13	6	7	8.5	11

For thread diameter	M20	M22	M24	M27	M30	M33	M36	M39	M42	M45	M48	M52
d	21	23	25	28	31	34	37	40	43	46	50	54
B	18	20	20	23	26	28	30	32	35	38	40	44
D	42	50	50	58	63	68	75	82	88	95	100	105
L	36	42	42	48	52	56	60	64	70	75	80	85
h ①	1.00	1.00	1.00	1.60	1.60	1.60	1.60	1.60	1.60	1.60	1.60	1.60
per 1000 units ≈ kg	11	14.8	14.2	31	36.3	42	51.3	59.7	69.5	81.2	89	98

NOTES

- ① Dimensions h are approximate.
- For use with hex nuts to prevent loosening under vibration.
- Bend the tab against a flat surface or into a slot.
- Material: Spring steel (EN 10132-4).
- Finish: Plain (other finishes available).
- Conforms to DIN 93.



DIN 93 TAB WASHERS



LOCKS NUTS
IN POSITION



VIBRATION
RESISTANT



RELIABLE
PERFORMANCE



STANDARD
DIN 93 – Tab Washers



MATERIAL
Spring Steel (EN 10132-4)



FINISH
Plain (other finishes available)



info@mehejindustries.com



www.mehejindustries.com



+91 9819933344



MEHEJ
INDUSTRIES
Fastening the Future


DIN 432

EXTERNAL TAB WASHER

DIMENSIONS & SPECIFICATIONS

External tab washers are used in conjunction with nuts and bolts to prevent loosening caused by vibration or rotation. The tab is bent against a flat surface or into a slot to secure the assembly.

Unit: mm

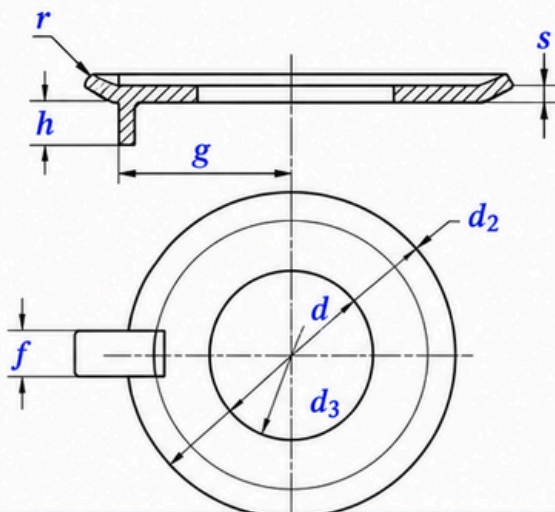

d – For thread diameter (nominal size)
d₂ – Outside diameter
d₃ – Inside diameter (≈)
g – Tab length
s – Thickness
f – Tab width
h – Tab height (≈)
r – Corner radius (≈)

For thread diameter	M3	M3.5	M4	M5	M6	M7	M8	M10	M12	M14	M16
d	3.2	3.7	4.3	5.3	6.4	7.4	8.4	10.5	13	15	17
d ₂	12	12	14	17	19	19	22	26	30	33	36
d ₃ ≈	8	8	10	12	14	14	16	20	24	27	30
g	4.5	4.5	5.5	7	7.5	7.5	8.5	10	12	13	15
s	0.4	0.4	0.4	0.75	0.75	0.75	1	1	1.2	1.2	1.2
f	2.5	2.5	2.5	3.5	3.5	3.5	3.5	4.5	4.5	4.5	5.5
h ≈	2	2	2	2.5	3	3	4	4	4.5	4.5	4.5
r	0.4	0.4	0.4	0.6	0.6	0.6	1	1	1	1	1
per 1000 units ≈ kg	0.33	0.32	0.44	1.20	1.48	1.42	2.54	3.49	5.48	6.38	7.45

For thread diameter	M18	M20	M22	M24	M27	M30	M33	M36	M39	M42	M45
d	19	21	23	25	28	31	34	37	40	43	46
d ₂	40	42	50	50	58	63	68	75	82	88	95
d ₃ ≈	34	36	43	43	50	55	60	67	74	80	85
g	18	18	20	21	23	25	28	31	33	36	38
s	1.2	1.6	1.6	1.6	1.6	1.6	1.6	2	2	2	2
f	6.5	6.5	7.5	7.5	8.5	8.5	9.5	11	11	11	13
h ≈	4.5	4.5	6.5	6.5	9.5	9.5	9.5	9.5	11	11	12
r	1	1	1	1	1	1	1	1	1	1	1
per 1000 units ≈ kg	9.15	13.1	19.4	18.5	24.8	29.8	34.2	52.5	63.3	72.5	85.3

NOTES

- Dimensions h and r are approximate.
- Tab is bent against a flat surface or into a slot to prevent rotation.
- For use with hex nuts.
- Material: Spring steel (EN 10132-4).
- Finish: Plain (other finishes available).
- Conforms to DIN 432.



PREVENTS
LOOSENING

DIN 432

EXTERNAL TAB WASHER



RESISTS
VIBRATION



SECURES
ASSEMBLY



STANDARD
DIN 432 – External Tab Washers



MATERIAL
Spring Steel (EN 10132-4)



FINISH
Plain (other finishes available)



info@mehejindustries.com



www.mehejindustries.com



+91 9819933344