




MEHEJ
INDUSTRIES

Fastening the Future

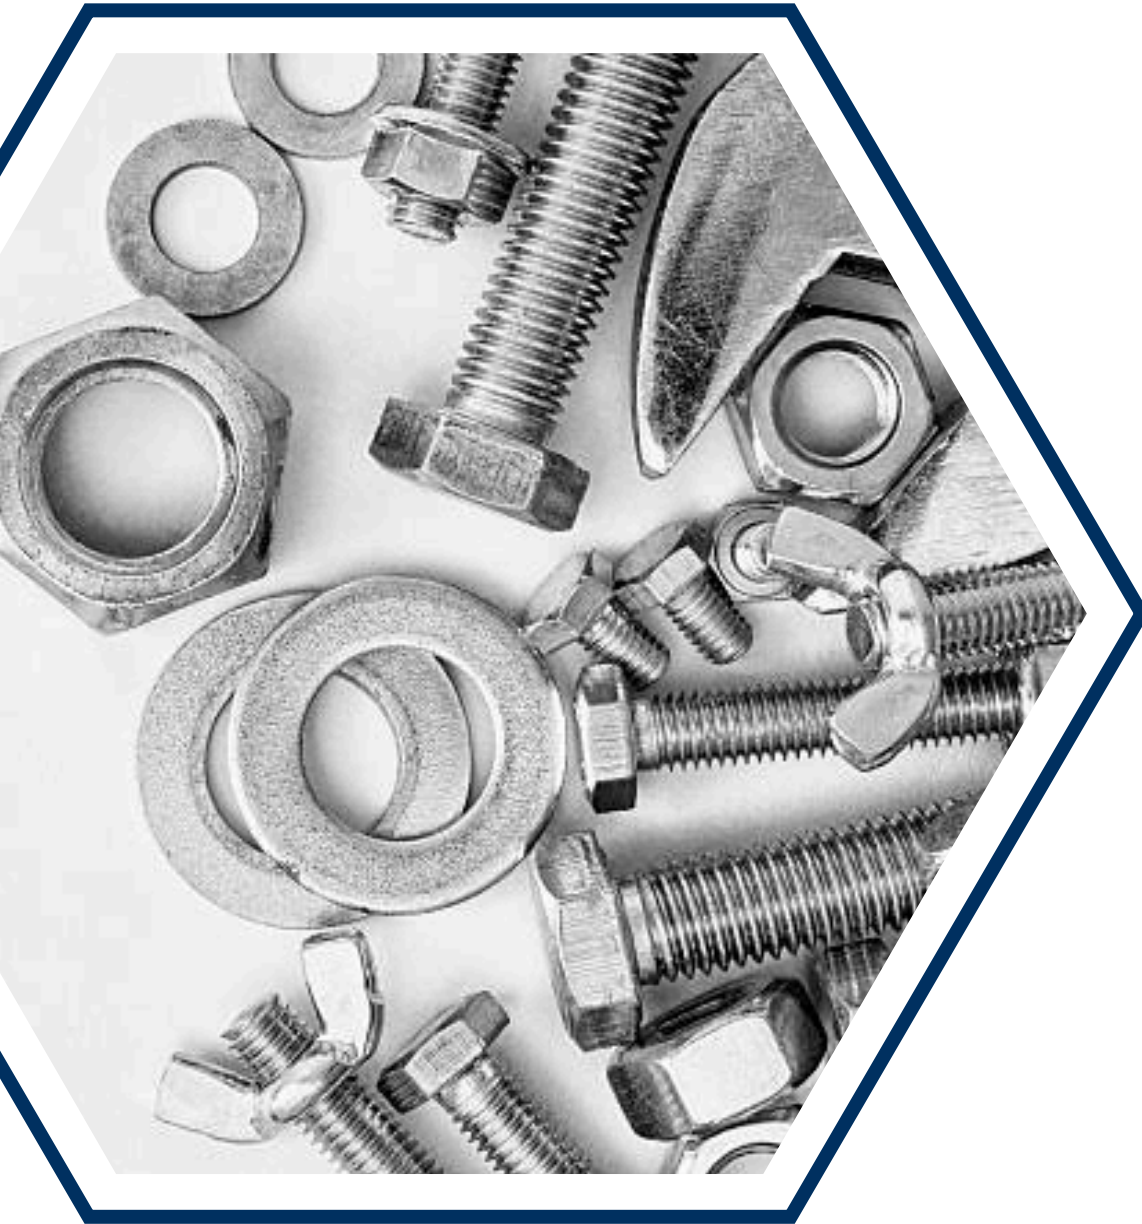

info@mehejindustries.com



www.mehejindustries.com



+91 9819933344



Wave Washers

Wave washers are a type of spring washer characterized by their wave-like shape, designed to provide controlled spring force and load distribution in limited axial space. Unlike traditional spring washers, they offer flexibility with lower deflection and are ideal for applications requiring light to moderate loads with precise pressure.

Specification of Wave Washer:

- Specification of Wave Washer:
- Dimension: ASTM, DIN, BS, IS and all International Standards
- Inner Diameter (ID): As per shaft/bolt size (M3 to M100+)
- Outer Diameter (OD): Standard & Custom sizes
- Thickness: Light and precision series / Custom sizes
- Load Type: Light to medium load applications
- Finish / Coating: Zinc Plated, Black Oxide, Phosphate, Plain, etc.
- Heat Treatment: Hardened & Tempered for spring performance

Material Available : Carbon Steel , Alloy Steel , Stainless Steel (SS 202 , SS 304, SS 316, etc.) , Brass , Copper , Aluminum , Nylon / Plastic (for insulation applications)

Application :


- Automotive Components
- Electrical & Electronics
- Precision Instruments
- Aerospace Industry
- Pumps & Valves
- Bearings & Assemblies
- Light Machinery



DIN 137 (A) FOR WAVE WASHERS

DIMENSIONS & SPECIFICATIONS

Wave washers are elastic, load-bearing elements used to compensate for tolerances, reduce energetic vibrations, and maintain tension in bolted connections. They are suitable for applications with limited axial installation space.

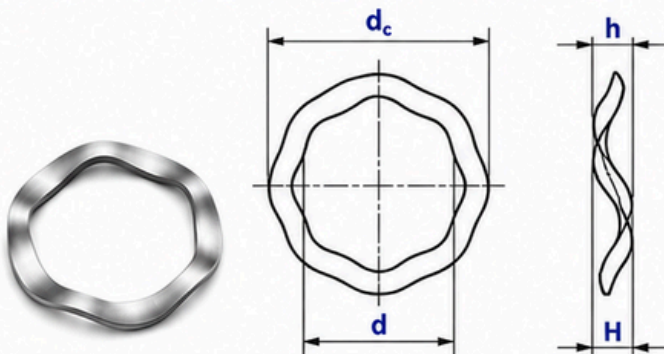

d – Inside diameter
(min = nominal size)
d_c – Outside diameter
h – Thickness
H – Height (free height)

All dimensions in millimeters (mm).

Nominal Diameter		1	1.2	1.4	1.7	1.8	2	2.3	2.6
d	min = nominal size	1.1	1.3	1.5	1.8	1.9	2.2	2.5	2.8
	max	1.35	1.55	1.75	2.05	2.15	2.45	2.75	3.05
d_c	Nominal Size	2.5	3	3	4	4	4.5	5	5.5
	max	2.8	3.3	3.3	4.375	4.375	4.875	5.375	5.875
	min	2.2	2.7	2.7	3.625	3.625	4.125	4.625	5.125
h	Nominal Size	0.2	0.2	0.25	0.25	0.25	0.3	0.3	0.3
	max	0.22	0.22	0.27	0.27	0.27	0.33	0.33	0.33
	min	0.18	0.18	0.23	0.23	0.23	0.27	0.27	0.27
H	min	0.35	0.35	0.4	0.45	0.45	0.5	0.5	0.55
	max	0.7	0.7	0.8	0.9	0.9	1	1	1.1
per 1000 units ≈ kg		0.006	0.009	0.01	0.02	0.02	0.028	0.035	0.041

Nominal Diameter		3	3.5	4	5	6	7	8	10
d	min = nominal size	3.2	3.7	4.3	5.3	6.4	7.4	8.4	10.5
	max	3.5	4	4.6	5.6	6.76	7.76	8.76	10.93
d_c	Nominal Size	6	7	8	10	11	12	15	18
	max	6.375	7.45	8.45	10.45	11.55	12.55	15.55	18.55
	min	5.625	6.55	7.55	9.55	10.45	11.45	14.45	17.45
h	Nominal Size	0.4	0.4	0.5	0.5	0.5	0.5	0.5	0.8
	max	0.45	0.45	0.55	0.55	0.55	0.55	0.55	0.86
	min	0.35	0.35	0.45	0.45	0.45	0.45	0.45	0.74
H	min	0.65	0.7	0.8	0.9	1.1	1.2	1.7	2
	max	1.3	1.4	1.6	1.8	2.2	2.4	3.4	4
per 1000 units ≈ kg		0.063	0.088	0.14	0.222	0.247	0.265	0.476	1.05

NOTES

- All dimensions in millimeters (mm).
- Values are as per DIN 137 (A).
- Material: Spring steel.
- Finish: Plain (other finishes available).
- Provides axial flexibility and constant spring force.



VIBRATION
DAMPING

DIN 137 (A) FOR WAVE WASHERS



LOAD
COMPENSATION



RETAINS TENSION
IN JOINTS



STANDARD

DIN 137 (A) – Wave Washers



MATERIAL

Spring Steel (EN 10270-1)



FINISH

Plain (other finishes available)






MEHEJ
INDUSTRIES
Fastening the Future

DIN 6904 FOR WAVE WASHERS

DIMENSIONS & SPECIFICATIONS

Wave washers are elastic, load-bearing elements used to compensate for tolerances, reduce energetic vibrations, and maintain tension in bolted connections. They are suitable for applications with limited axial installation space.

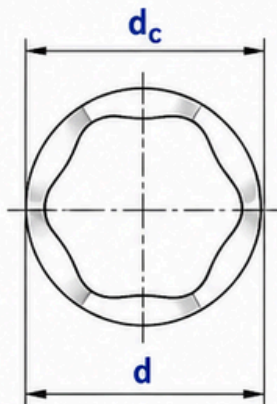

d – Inside diameter
(min = nominal size)

d_c – Outside diameter
(max = nominal size)

h – Thickness

H – Height

All dimensions in millimeters (mm).

For thread diameter ④		M2.5 ① ②	M3 ①	M3.5 ①	M4	M5	M6	M8	M10
d ③	min = nominal size	2.25	2.7	3.2	3.6	4.55	5.4	7.3	9.2
	max	2.35	2.8	3.32	3.72	4.67	5.52	7.45	9.35
d_c	max = nominal size	7	8	8	9	11	12	15	21
	min	6.78	7.78	7.78	8.78	10.73	11.73	14.73	20.67
h	Nominal Size	0.5	0.5	0.5	0.8	0.8	0.8	1	1
	max	0.55	0.55	0.55	0.86	0.86	0.86	1.07	1.07
	min	0.45	0.45	0.45	0.74	0.74	0.74	0.93	0.93
H	max	1.05	1.05	1.15	1.65	1.75	2	2.4	2.6
	min	0.9	0.9	1	1.5	1.6	1.85	2.2	2.4
per 1000 units ≈ kg		0.13	0.17	0.16	0.34	0.49	0.57	1.06	2.20

NOTES

- ① Suitable for coarse thread DIN 13.
- ② Suitable for fine thread DIN 13.
- ③ d = Inside diameter (min = nominal size).
- ④ Forthread diameter (nominal size).
- Material: Spring steel (EN 10270-1).
- Finish: Plain (other finishes available).
- Conforms to DIN 6904.



DIN 6904 FOR WAVE WASHERS



VIBRATION
DAMPING



LOAD
COMPENSATION



RETAINS TENSION
IN JOINTS



STANDARD
DIN 6904 – Wave Washers



MATERIAL
Spring Steel (EN 10270-1)



FINISH
Plain (other finishes available)



info@mehejindustries.com



www.mehejindustries.com



+91 9819933344