CoolPAK™ E8240

High Lubrication Emulsion

Hardworking CoolPAK™ E8240 delivers very good surface finish and tool life on difficult to machine aluminium alloys, inconel, titanium, stainless and high tensile strength steels. E8240 is robust, low maintenance, high performing and delivers long life without rancid odours normally associated with traditional emulsions.

Application Guidelines

- Concentrations above 7% provide the best sump life.
- Run at lower concentrations for higher speed operations where heat removal is the key issue.
- Run at higher concentration on soft, gummy materials and for lower speed operations where friction reduction and control of built-up edge are critical.
- For additional product application information, including performance optimisation, please contact your Master Fluid Solutions' Authorised Distributor at https://www.masterfluids.com/eu/en/distributors/index.php, your District Sales Manager, or call our Tech Line at +49 211 41 72 8 -900.

Physical Properties Typical Data

Colour (Concentrate)	Light brown
Colour (Working Solution)	Opaque white
Odour (Concentrate)	Mild Amine
Form (Concentrate)	Liquid
Flash Point (Concentrate)	> 120°C (ASTM D93-08)
pH (Concentrate as Range)	9.5 - 10.0
pH (Typical Operating as Range)	9.0 - 9.5
Coolant Refractometer Factor	1.0
Viscosity	137.6 mm^2/s @40°C

Choose CoolPAK E8240:

- Low foam
- Low carry-off
- Good lubricity
- Long sump life
- Hard water tolerant
- Multi metal compatible
- Controls built-up edge (BUE)
- Very good health and safety record
- Free of formaldehyde, boron, chlorine, sulphur and phenol

Health and Safety

For further information, see the most recent SDS which is available directly from Master Fluid Solutions or from your Master Fluid Solutions' Authorised Distributor.

Packaging

CoolPAK™ E8240

High Lubrication Emulsion

Recommended Concentrations

Light Duty	5.0% - 8.0%
Moderate Duty	8.0% - 10.0%
Heavy Duty	10.0% - 15.0%
Design Concentration Range	5.0% - 15.0%

Mixing Instructions


- Recommended usage concentration in water: 5.0% - 15.0%
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.
- Use mineral-free water to improve sump life and corrosion inhibition while reducing carryoff and concentrate usage.

Additional Information

- Use Master STAGES™ Whamex™ for a quick and thorough precleaning of your machine tool and coolant system.
- Consult Master Fluid Solutions before using on any metals or applications not specifically recommended.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.

The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation, or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. Contact your Master Fluid Solutions' District Sales Manager for the latest version of this document. Master STAGES™, CoolPAK™, and Whamex™ are trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.

Concentration by % Brix

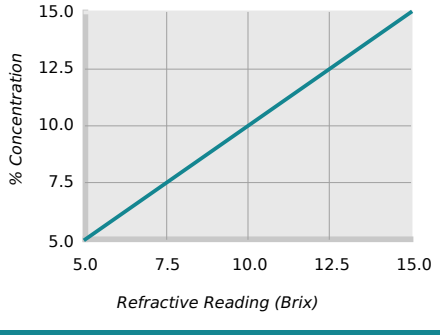

% Concentration = Refractive Reading x Refractive Factor
Coolant Refractometer Factor % Brix = 1.0

Master Fluid Solutions WDG GmbH
Hasselsstraße 6-14
Düsseldorf, 40597
Germany

+49 211 41 72 82 00
info-eu@masterfluids.com
masterfluids.com/eu/en/