CoolPAK™ S4144

Ferrous Low-foam Semisynthetic

CoolPAK™ S4144 is a low foam, boron and formaldehyde free semi-synthetic designed especially for high volume production of ferrous components. Very good ferrous corrosion inhibition coupled to good cast aluminium compatibility makes S4144 a good choice when a cost effective multi-metal option is required.

Application Guidelines

- Running at or above 6% offers the best sump life and corrosion inhibition on cast iron chips.
- Not recommended for use on very reactive metals, such as magnesium.
- For additional product application information, including performance optimisation, please contact your Master Fluid Solutions' Authorised Distributor at https://www.masterfluids.com/eu/en/distributors/index.php, your District Sales Manager, or call our Tech Line at +49 211 41 72 8 -900.

Physical Properties Typical Data

Colour (Concentrate)	Light yellow
Colour (Working Solution)	Opaque
Odour (Concentrate)	Mild Amine
Form (Concentrate)	Liquid
Flash Point (Concentrate)	> 140°C (ASTM D92-90)
pH (Concentrate as Range)	10.1 - 10.3
pH (Typical Operating as Range)	8.7 - 9.7
Coolant Refractometer Factor	2.1
Digital Titration Factor	0.0274
Viscosity	30.1 mm^2/s @40°C
V.O.C. Content (ASTM E1868-10)	1 g/l

Choose CoolPAK S4144:

- Runs clean
- Low foaming
- Free of boron and formaldehyde
- Keeps machines very clean while leaving a soft fluid film for ease of cleaning and reduced maintenance
- Provides corrosion inhibition on all ferrous and nonferrous metals

Health and Safety

For further information, see the most recent SDS which is available directly from Master Fluid Solutions or from your Master Fluid Solutions' Authorised Distributor.

Packaging

CoolPAK™ S4144

Ferrous Low-foam Semisynthetic

Recommended Concentrations

Light Duty	4.0% - 6.5%
Moderate Duty	6.5% - 8.5%
Heavy Duty	8.5% - 10.0%
Design Concentration Range	4.0% - 10.0%

Mixing Instructions


- Recommended usage concentration in water: 4.0% - 10.0%
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.
- Use mineral-free water to improve sump life and corrosion inhibition while reducing carryoff and concentrate usage.

Additional Information

- Use Master STAGES™ Whamex XT™ for a quick and thorough precleaning of your machine tool and coolant system.
- Consult Master Fluid Solutions before using on any metals or applications not specifically recommended.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.

The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation, or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. Contact your Master Fluid Solutions' District Sales Manager for the latest version of this document. Master STAGES™, CoolPAK™, and Whamex XT™ are trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.

Concentration by % Brix

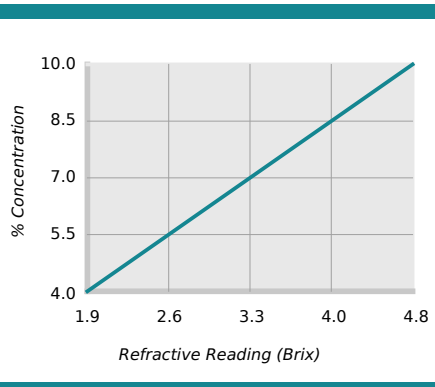

% Concentration = Refractive Reading x Refractive Factor
Coolant Refractometer Factor % Brix = 2.1

Master Fluid Solutions WDG GmbH
Hasselsstraße 6-14
Düsseldorf, 40597
Germany

+49 211 41 72 82 00
info-eu@masterfluids.com
masterfluids.com/eu/en/