
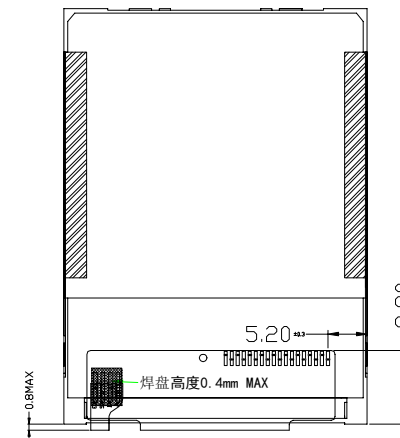
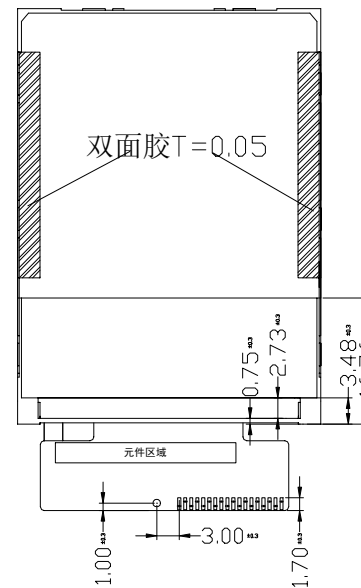


REV.	DRG DATE	DESCRIPTION	DRAWN BY
1.0	15-03-15	Firt issue	

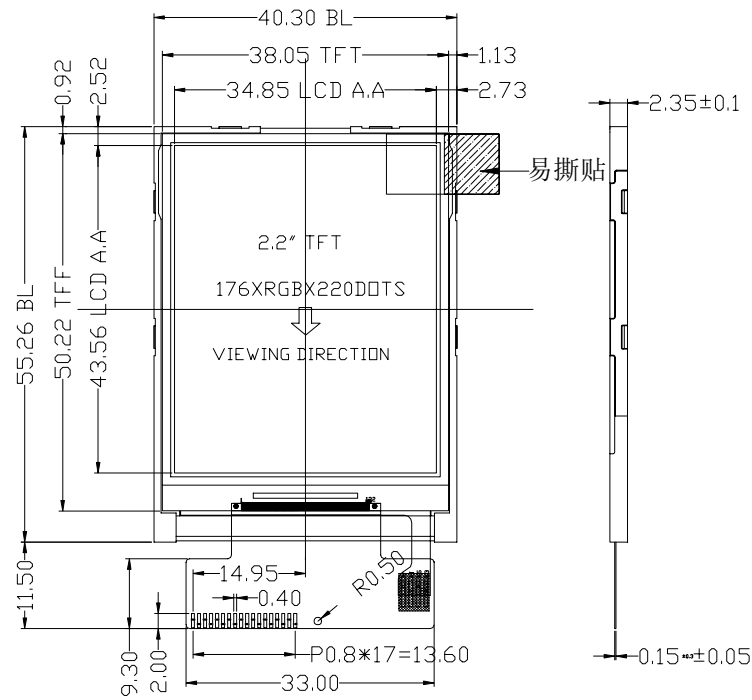


FPC弯折示意图
FPC展开出货

PIN	Symbol
1	VSS
2	LED-
3	LED+
4	VSS
5	/RESET
6	A0
7	SDA
8	SCK
9	VDDA
10	VDDIO
11	CS
12	VSS
13	YD/NC
14	XL/NC
15	YU/NC
16	XR/NC
17	VSS
18	VSS

NOTES:

- 1.DISPLAY TYPE: 2.2"TFT
- 2.VIEWING DIRECTION: 12:00
- 3.LCD DRIVE IC: ILI9225G
- 4.POLARIZER MODE: TRANSMISSIVE/POSITIVE
- 5.OPERATING TEMP: -10° C~+60° C
- 6.STORAGE TEMP: -20° C~+70° C
- 7.UNMARKER TOLERANCE: ±0.20
- 8.REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS



BL CIRCUIT DIAGRAM

深圳市全动电子技术有限公司						DRG DATE	2019-05-25
						DRAWING	BURT
TITLE.	LCM OUTLINE	REV.	UNIT	SIZE		CHECK	BURT
MODEL.	QDTFT2202		mm	A4		APPROVE	BURT