





Рac №2

Сенотрусов ИС223

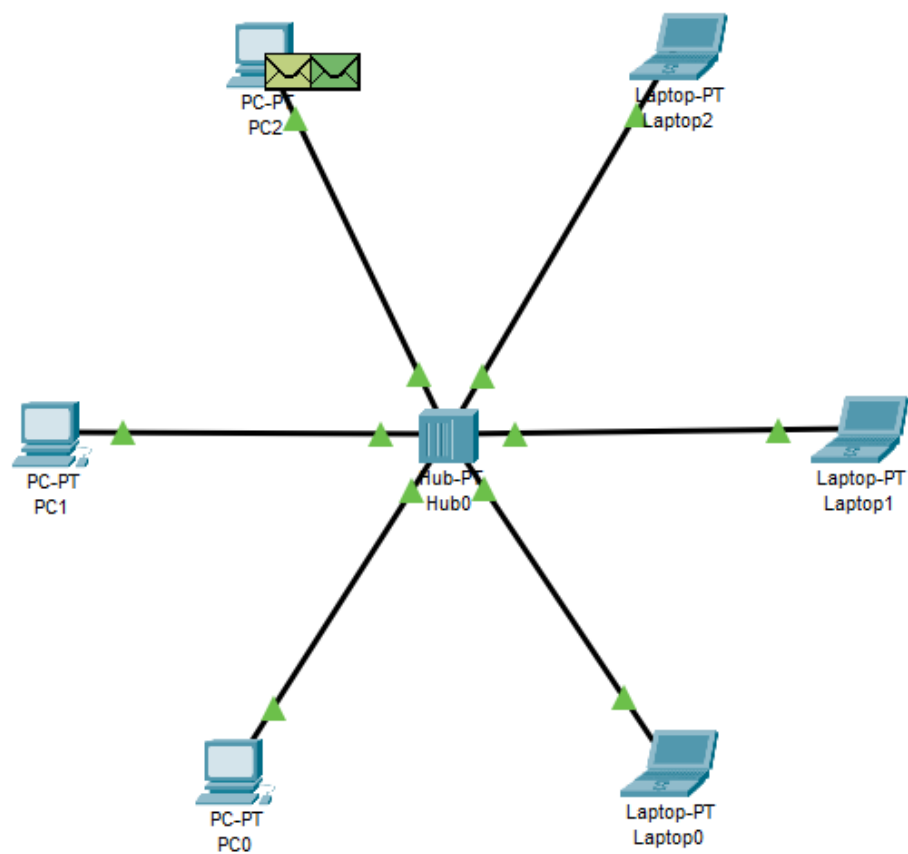

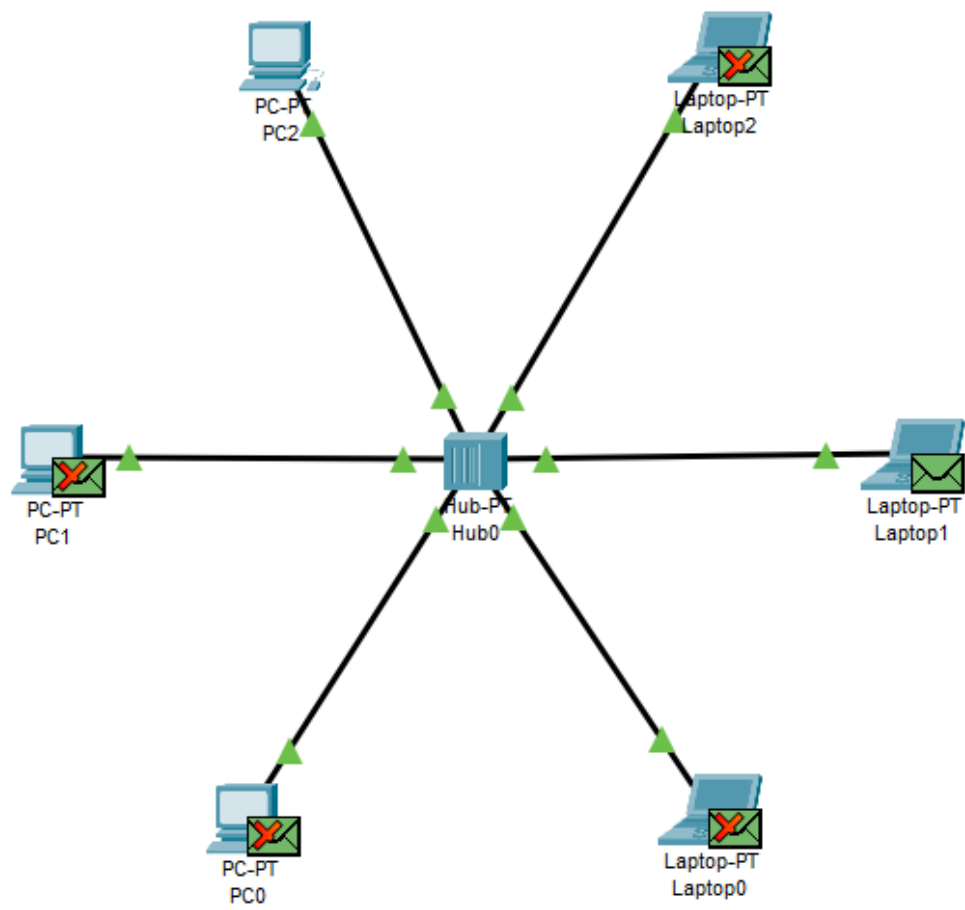

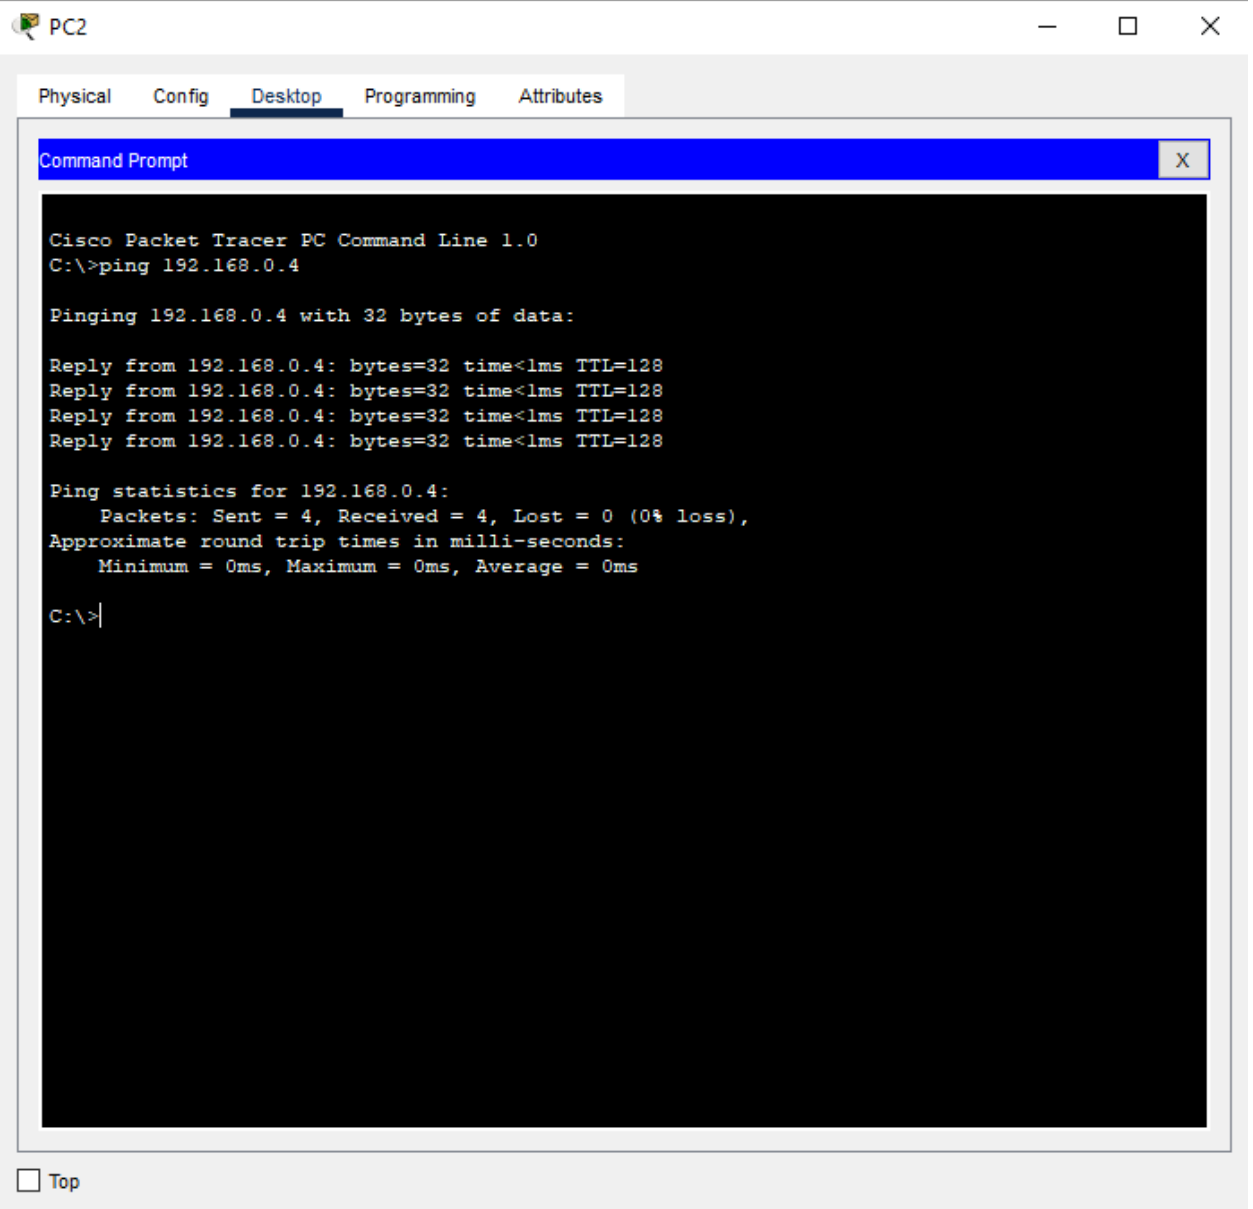

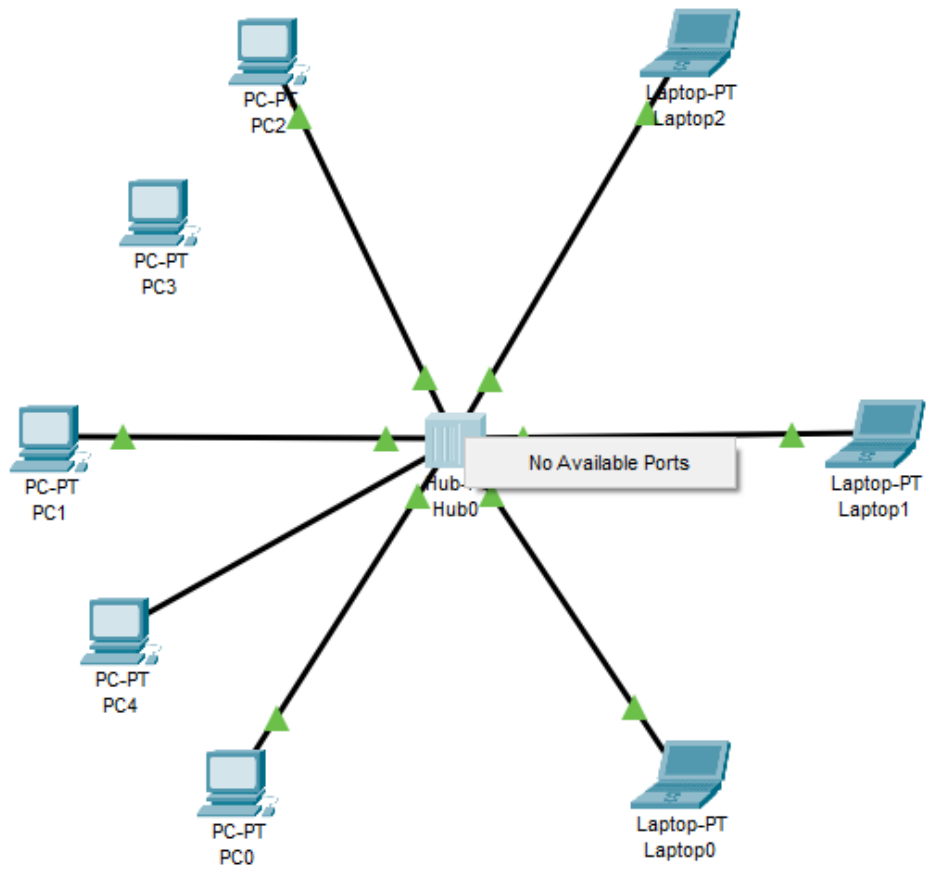

Physical Config Attributes

MODULES

PT-REPEATER-NM-1CE

PT-REPEATER-NM-1CFE

PT-REPEATER-NM-1CGE

PT-REPEATER-NM-1FFE

PT-REPEATER-NM-1FGE


PT-REPEATER-NM-COVER

Physical Device View


Zoom In

Original Size


Zoom Out




Customize Icon in Physical View




Customize Icon in Logical View






The PT-REPEATER-NM-1CE features a single Ethernet port that can connect a LAN backbone which can also support either six PRI connections to aggregate ISDN lines, or 24 synchronous/asynchronous ports.





☐ Top

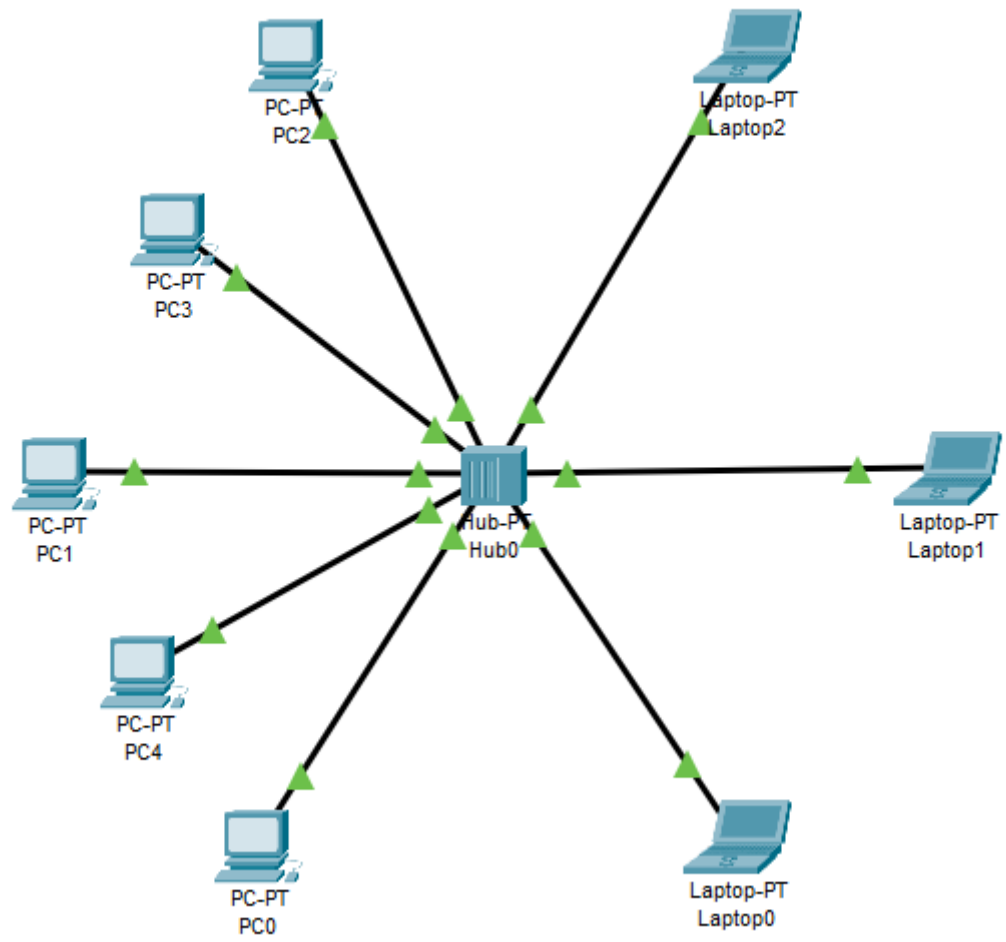

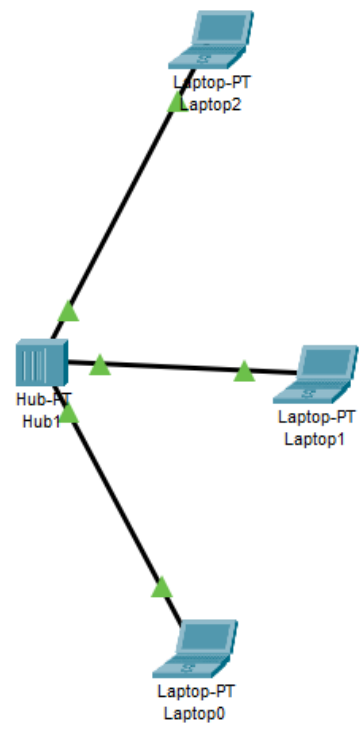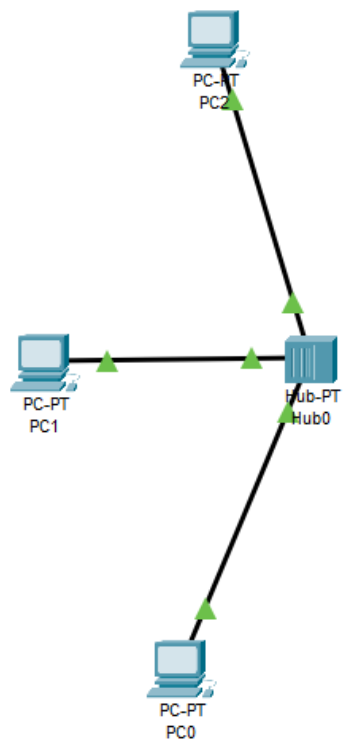

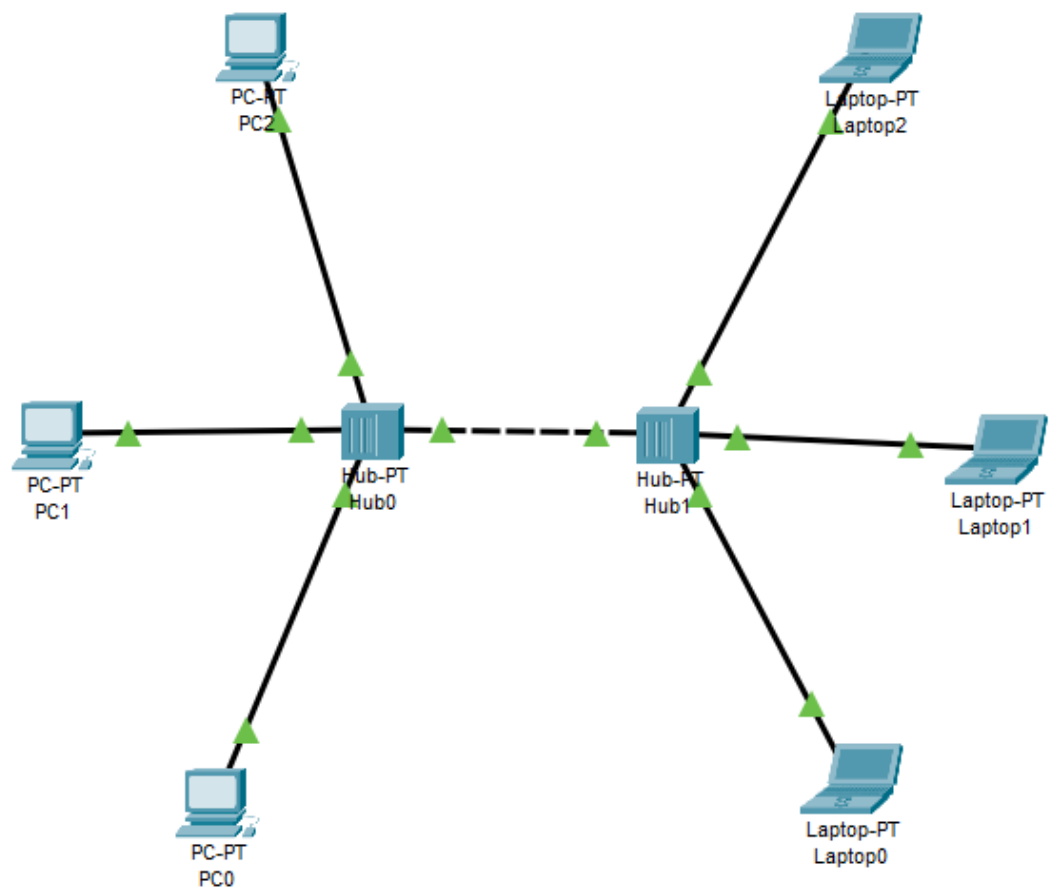

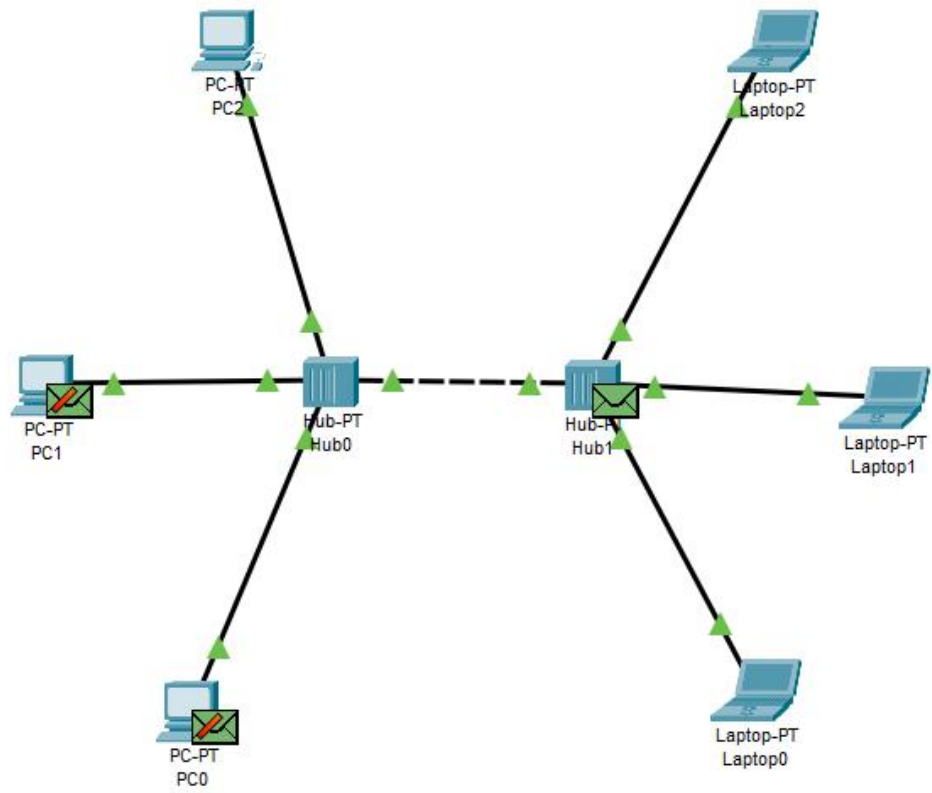

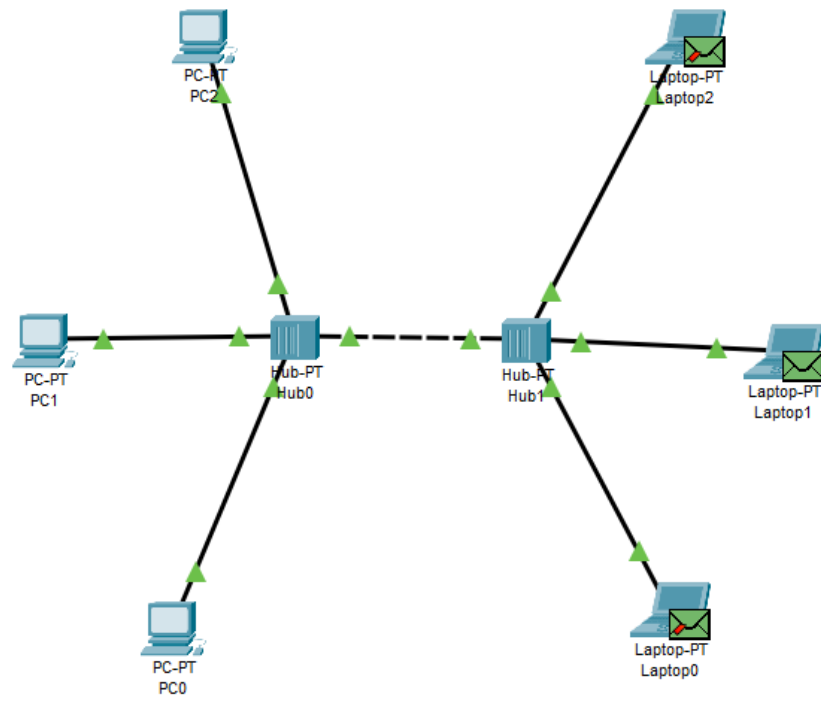

Physical Config **Desktop** Programming Attributes

Command Prompt

X

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.4

Pinging 192.168.0.4 with 32 bytes of data:

Reply from 192.168.0.4: bytes=32 time<1ms TTL=128
Reply from 192.168.0.4: bytes=32 time<1ms TTL=128
Reply from 192.168.0.4: bytes=32 time<1ms TTL=128
Reply from 192.168.0.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.0.4

Pinging 192.168.0.4 with 32 bytes of data:

Reply from 192.168.0.4: bytes=32 time=1ms TTL=128
Reply from 192.168.0.4: bytes=32 time<1ms TTL=128
Reply from 192.168.0.4: bytes=32 time<1ms TTL=128
Reply from 192.168.0.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

☐ Top