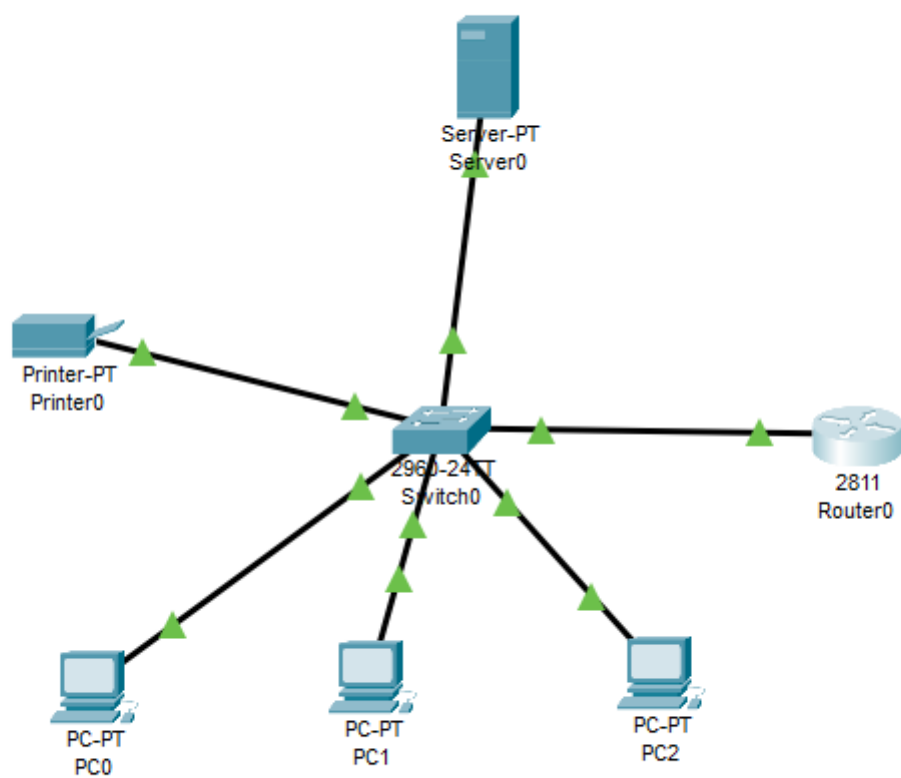Prac №11

Сенотрусов ИС223

Router0

Physical   Config   CLI   Attributes

IOS Command Line Interface

```
Would you like to enter the initial configuration dialog? [yes/no]: no


Press RETURN to get started!



Router>en
Router#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip address 192.168.0.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#^Z
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#en
Router#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#ip dhcp excluded-address 192.168.0.1 192.168.0.5
Router(config)#ip dhcp pool companyname
Router(dhcp-config)#network 192.168.0.0 255.255.255.0
Router(dhcp-config)#default-router 192.168.0.1
Router(dhcp-config)#domain-name companyname
Router(dhcp-config)#dns-server 192.168.0.2
Router(dhcp-config)#exit
Router(config)#S
```

Copy   Paste

☐ Top

< | > | URL http://company.com | Go | Stop

Cisco Packet Tracer

Welcome to Cisco Packet Tracer. Opening doors to new opportunities. Mind Wide Open.

Quick Links:
A small page
Copyrights
Image page
Image

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```