
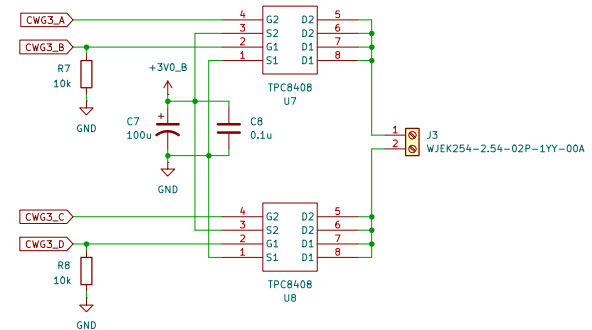
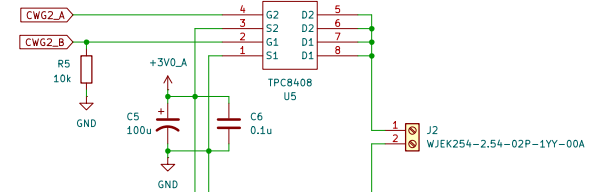
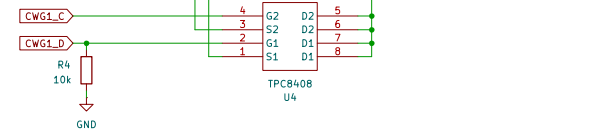
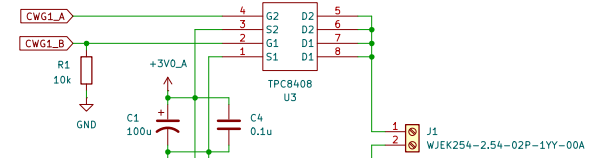


NOTE:

- The power supply is assumed to consist of two dry cell batteries connected in series.
- This circuit does not include a power switch, as it is assumed that the battery holder has an integrated switch.
- This circuit provides two power input options. If only one input is used, install a jumper on JP1 to connect both power lines.

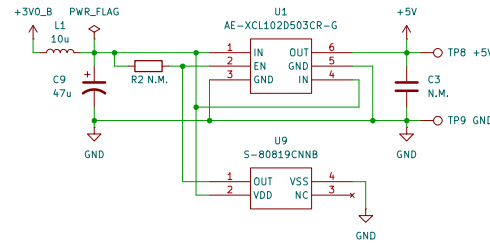

KickState (@kickstate7)

Sheet: /
File: MotorDriver_2nd-Ed.kicad_sch

Title: Motor-driver unit for IOExp

Size: A3 Date: 2025-05-02

KiCad E.D.A. 8.0.9

Rev: 1.0.0

Id: 1/1