KIA TASMAN X-PRO FIT-OUT · v0.14 · 2026-11-01

Vehicle measurement sheet

Every dimension the 3D model still guesses: 109 items in nine areas. Fill these in, send back a photo of the pages (or the CSV), and the model gets updated. Then the cutting lists can be trusted. Each item shows **what the model assumes now**. A big difference from that is exactly what we need to catch. The **Stage** column shows the first build stage that depends on it (see docs/build-stages.md), and the 📷 box is for ticking off a photo.

Before you start

- Park on level ground, normal tyre pressures, unladen, and note the fuel level.
- Everything is in **mm**, measured to the **liner surface** (what the furniture will touch) unless it says otherwise.
- Driver side = right (D), passenger side = left (P).
- Run masking tape along the tub centreline (half the wall-to-wall width, marked at the front and at the tailgate). That's Y = 0.
- "Front / mid / rear" in the tub means X ≈ 100, 750 and 1400 unless an item says otherwise.
- Photograph each item with the tape in shot and its ID written on masking tape.
- Measure twice. If two readings differ by more than 2 mm, write both.


Tools

- 5 m tape and a 1 m steel rule
- 300 mm steel rule and digital calipers
- Straight edge ≥ 1.8 m (an aluminium level is ideal) and a spirit level
- Digital angle finder (a phone app works)
- Plumb bob or a laser line, string line
- Masking tape, marker, a radius gauge or a few coins

Priority

- **Stages 1 and 3** (tub, arches, fittings, chassis): needed before cutting anything for the battery bay, cabinets and slides.
- **Stage 6** (lid, bars, tent): under-tent storage.
- **Stages 2 and 7** (roof, windscreen): platform and visor.

D0 · Reference lines (datums) used on every sheet

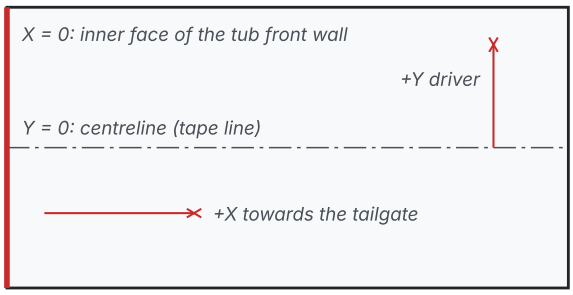

plan view, front of the vehicle on the left



side view

Generated from cad/params.py by tools/measure/measure_sheet.py. The diagrams are schematic, drawn from the model's current guesses, so they may not look exactly like your ute. Measure what's really there.

How to read the photo pages

These are your photos (sent 2026-11-01), marked up. Each mark carries the item ID used in the tables later in this pack.

	Blue dashed line: a reference (X0, Y0, Z0). Every measurement starts from one of these three. Set them up first (photo P1).
	**Yellow arrow: measure from one end to the other**, exactly between the two points shown.
	**Red dot: a point to locate.** Give its X (from the front wall), Z (from the rib tops) and, where asked, how far it is from the side wall.
	Red line: an edge to measure to (a face, step or bar).
	**Red dashed box: a feature to size**: its edges in X and Z, and how far it stands proud of (or recessed into) the wall.

Three rules that make the numbers usable


1. **X** always from the front-wall straight edge (X0), along the tub. A laser is easiest: back of the laser on the straight edge, aim at a card held on the point. **Y** always square off the centreline tape (Y0), or "from the side wall" where an item says so. **Z** always up from the straight edge lying across the rib tops (Z0).
2. For "how far it stands in from the side wall": hold a straight edge flat on the side wall where it is flat (forward of the thing), and measure square from the straight edge to the thing. Not from the bodywork outside, not from the liner's textured high spots.
3. Take a photo of the tape at each reading with the item ID written on masking tape in the shot. A photo of a reading beats a number.

Still to photograph

- Driver rear corner, square on (as P2). Your photo of it came through in the chat but not as a file; please re-attach it as a file so it can be marked up. It shows the C-shaped tie-down pocket (C11) and no outlet.
- Each tail-light housing from the tailgate, looking forward along the side wall, with a straight edge on the wall: shows C1/C2 "in".
- The outside shots you sent (rails, bars, tent latches, tail lights) are noted on the lid and tent items; re-send as files to mark up.

Photo P1 · Whole tub from the tailgate

Standing at the open tailgate, looking forward. Driver side (D) is on the RIGHT, passenger (P) on the left.

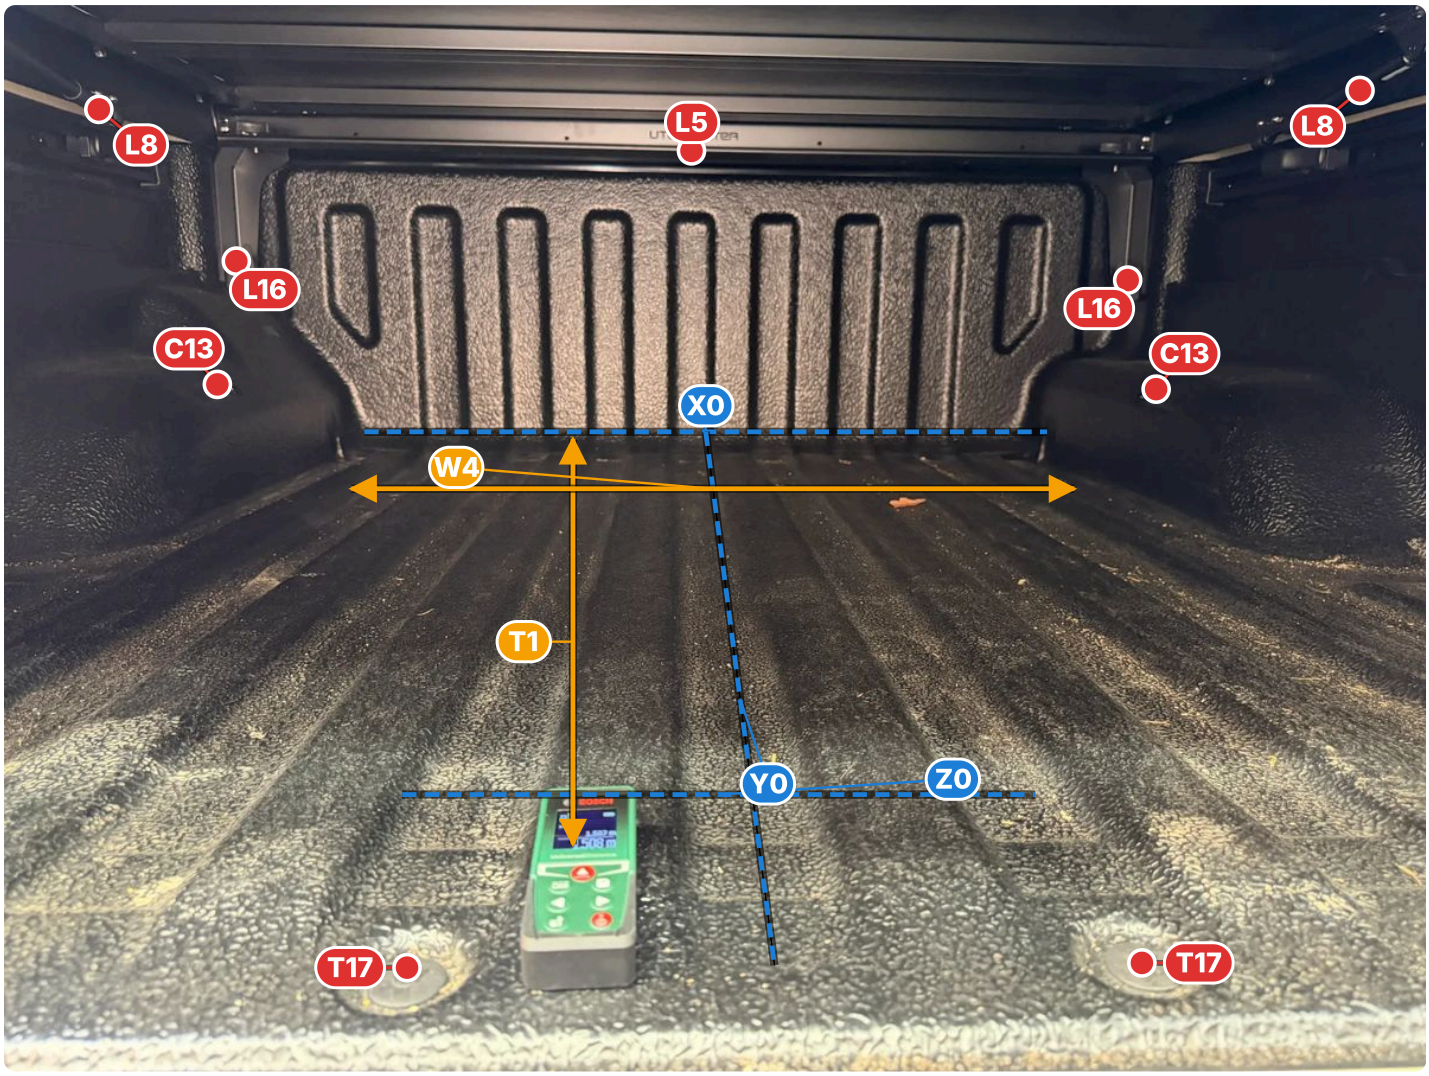

X0 **Reference X = 0: the front wall**
Hold a straight edge (level) flat across the RAISED panels of the front wall, about 100 mm above the floor. Every X is measured from that edge, not from the bottom of the vertical grooves.

Z0 **Reference Z = 0: the floor**
Lay the straight edge across the floor ribs. Every height is measured from the TOPS of the ribs (the ridges), never the valleys.

Y0 **Reference Y = 0: the centreline**
Mark halfway between the two round floor plugs at the tailgate end, and halfway wall-to-wall at the front wall. Run masking tape between the two marks; Y is measured square off this line.

T1 **Floor length**
FROM inside face of the CLOSED tailgate TO the X0 straight edge
On the centreline, at rib-top height. Laser: back of the laser flat on the closed tailgate, aim at a card held on the straight edge. Your photo reads 1.508 m: note where the back of the laser was.

W4 **Width between the arches**
FROM inner face of the P arch TO inner face of the D arch
Just above the floor, square across, at X ≈ 100, 430 and 760 (three readings).

C13 **Notch in each arch top (near the front wall)**
FROM X0 / Z0 TO centre of the notch
X and Z of the notch centre, its width and how deep it goes.

L16 **Lid front-corner bracket**
See photo P4 (driver front corner).


T17 **Round floor plugs**
FROM X0 and Y0 TO centre of each plug
X, Y of each centre and the diameter.

L8 **Lid gas struts**
See photos P4 and P5.

L5 **Lid front member**
FROM top of the tub rail TO underside of the lid
Gap at each corner with the lid closed (L5).

Photo P2 · Passenger rear corner (square on)

Standing at the centreline, facing the passenger wall. The tailgate is to the LEFT, the cab to the right.

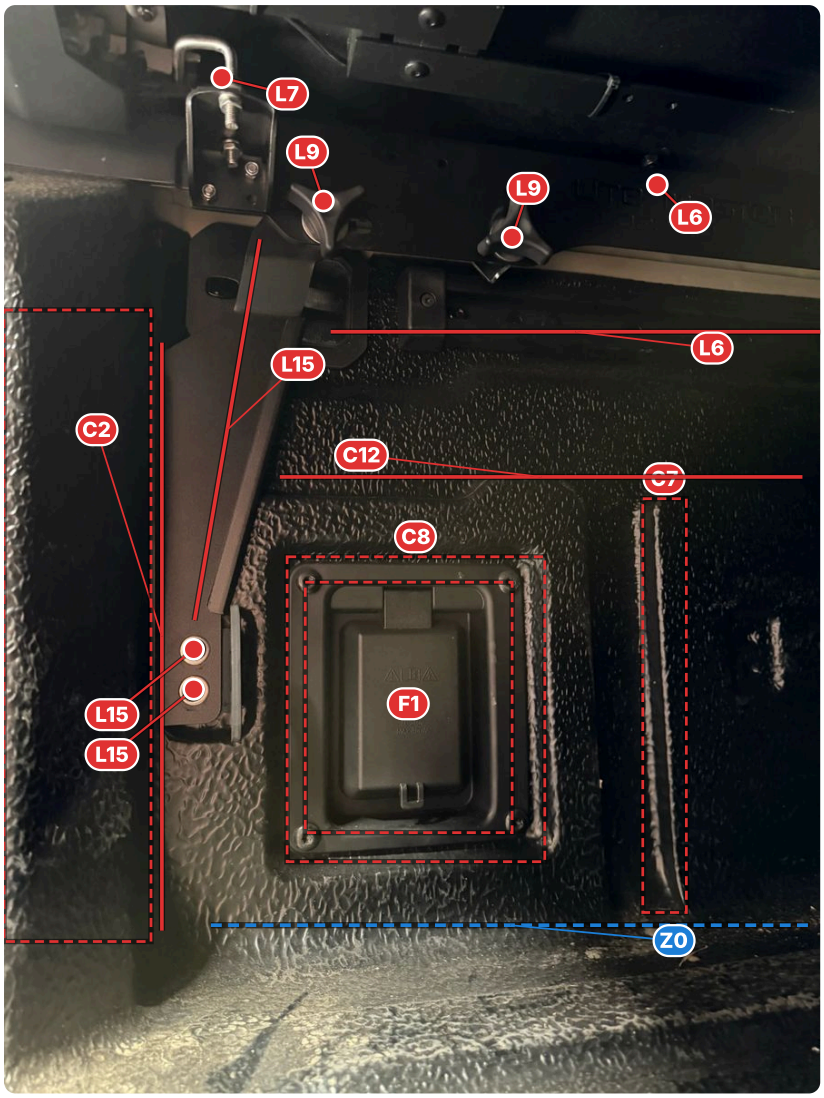

C2 — **Tail-light housing (P)**
FROM X0 (front wall) TO the housing's front face, where it leaves the side wall (red line)
At the floor, 270 high and just under the rail. Then how far it comes in: straight edge flat on the side wall FORWARD of the housing, measure square to it to the housing face, same three heights. Then Z of its bottom and top.

L15 — **Lid rear stay**
FROM Z0 / X0 TO centre of each of the 2 bolts
X and Z of both bolts; how far the bar stands off the wall at the bolts and at the top; bar width.

F1 — **Factory 240 V outlet bezel**
FROM X0 / Z0 TO bezel edges
X of the bezel's front and rear edges, Z of its top and bottom.

C8 — **Outlet recess**
FROM X0 / Z0 TO edges of the recessed panel
X front and rear, Z bottom and top, and how deep it is behind the wall face.

C7 — **Vertical rib**
FROM X0 / Z0 TO rib centre
X of the centre, width, how far it stands proud, Z where it stops.

C12 — **Wall step (ledge line)**
FROM Z0 TO the step line
Height of the step; then straight edge on the upper wall, measure in to the lower wall (step depth).

L9 — **Star-knob clamps**
FROM X0, side wall, Z0 TO each knob
X of each; how far its tip is from the side wall; Z of its lowest point.


L6 — **Lid side skirt (UTE MASTER plate) and the rail below it**
FROM Z0 and the side wall TO lowest edge of each
Z of the lowest edge of the skirt and of the aluminium rail; how far each stands in from the side wall.

L7 — **Shackle / catch at the lid corner**
FROM lid underside TO lowest point
How far it hangs below the lid, X of its centre.

Z0 — **Floor reference**
Heights from the rib tops (P1).

Photo P3 · Passenger rear corner, looking up at the lid hardware


Close to the passenger wall, looking up and back. Tailgate to the LEFT.

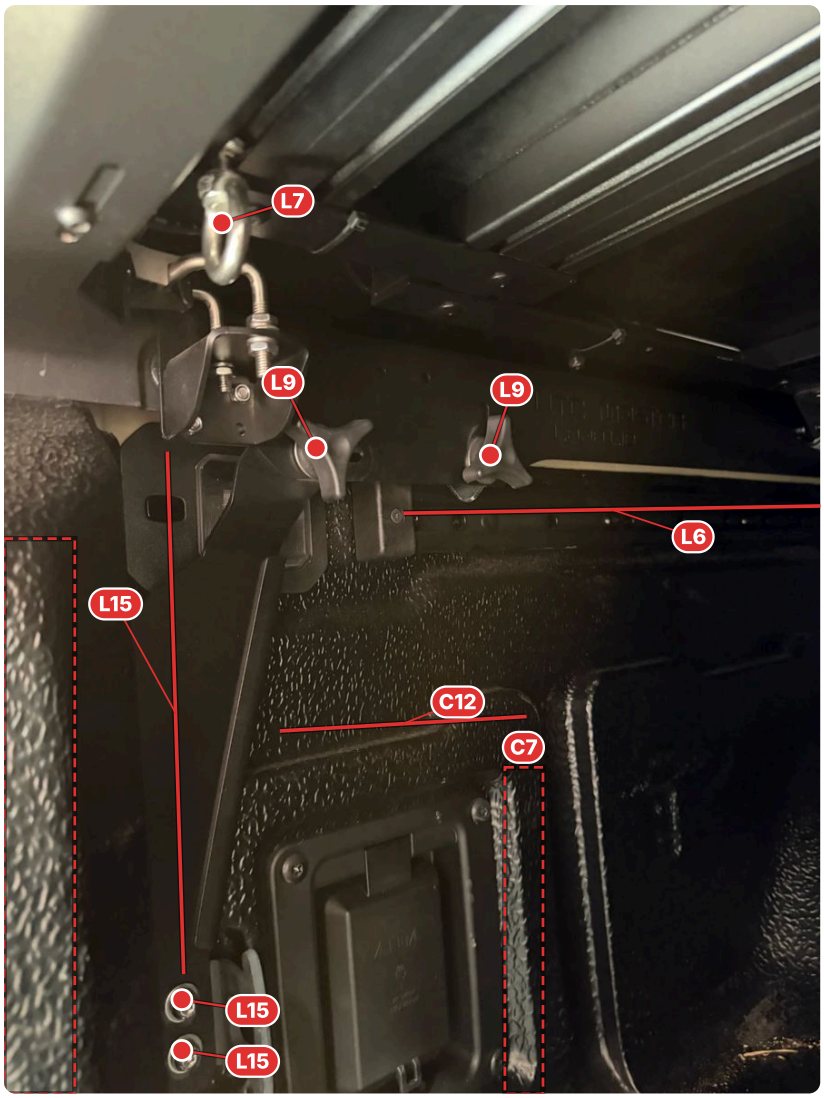

L7	**Shackle / catch** FROM lid underside TO lowest point Hang depth and X.
L9	**Star knobs** FROM side wall TO knob tip As P2.
L15	**Rear stay** FROM lid corner (top) / bolts (bottom) TO – Top: X where it leaves the lid. Bottom: the 2 bolts (P2).
L6	**Aluminium lid rail along the wall top** FROM side wall TO inner face of the rail How far in, and Z of its bottom edge.
C2	**Tail-light housing face** As P2.
C12	**Wall step** As P2.
C7	**Vertical rib** As P2.

Photo P4 · Driver front corner

Inside the tub near the driver arch, looking forward and right. Front wall on the LEFT, driver side wall on the right.

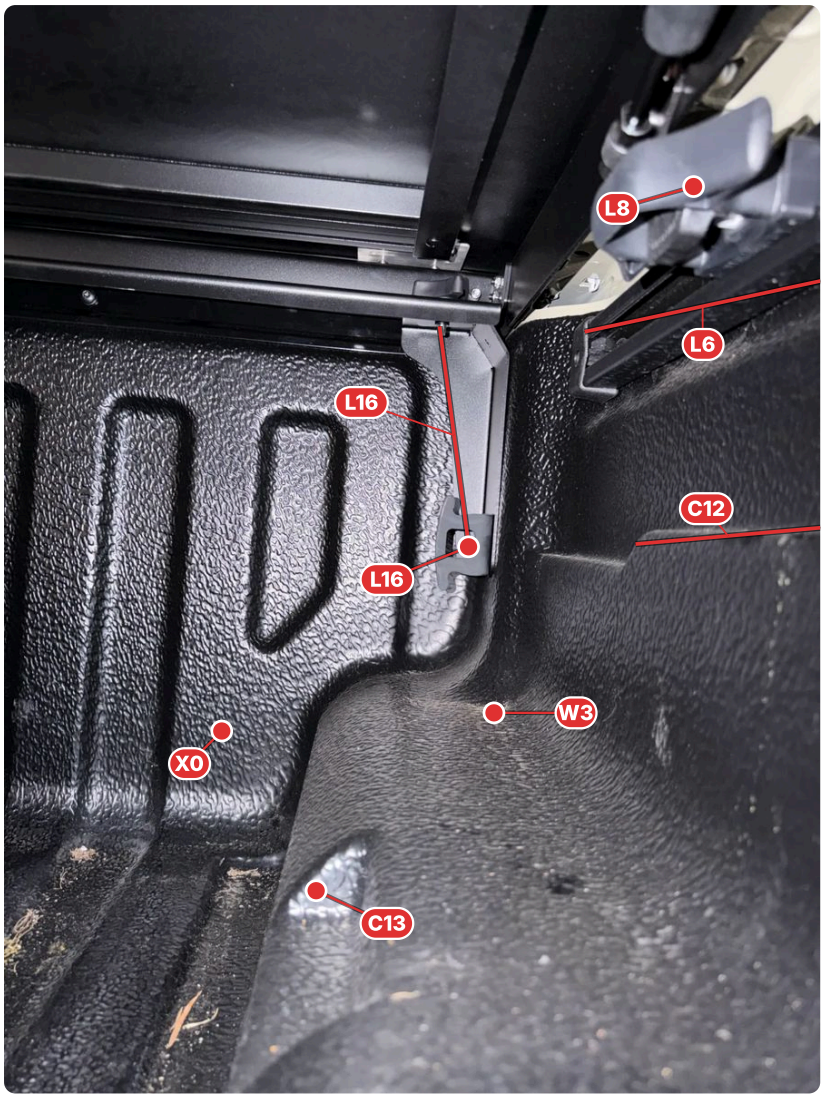

L16 **Lid front-corner bracket (angle with a plastic hook)**
FROM X0 / the side wall / Z0 TO bracket edges and the hook's bottom
How far it stands off the front wall, how far its outer edge is from the side wall, its width, and Z of the BOTTOM of the hook.

C12 **Wall step over the arch**
FROM Z0 TO step line
Height at the front and at the back of the arch.

C13 **Arch notch**
FROM X0 / Z0 TO notch centre
As P1.

W3 **Arch top**
FROM Z0 TO top of the arch
Height at the front, middle and rear of its top (W3); note where the top steps.


X0 **Front wall raised panel**
The X = 0 face (P1).

L8 **Gas strut, lower end**
FROM X0 / Z0 / side wall TO the strut's lower pivot
X, Z and distance from the side wall of BOTH strut ends (lid closed); strut diameter.

L6 **Lid rail along the wall top**
FROM side wall TO inner face
As P2.

Photo P5 · Passenger front corner


Inside the tub near the passenger arch, looking forward and left. Front wall on the RIGHT.

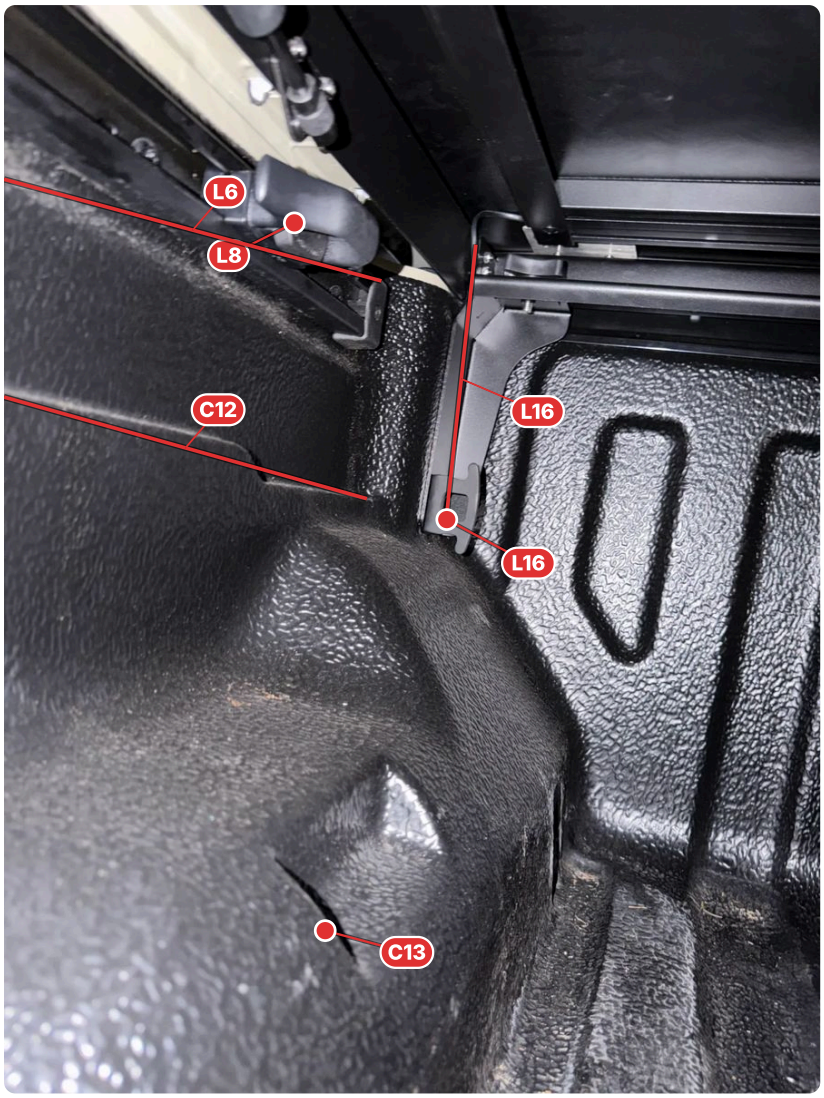

L16	**Lid front-corner bracket** As P4.
C12	**Wall step** As P2, passenger side.
C13	**Arch notch** As P1.
L8	**Gas strut** As P4, passenger side.
L6	**Lid rail** As P2.


1 · Tub: floor, walls and tailgate

D1 · Tub, plan view (from above)

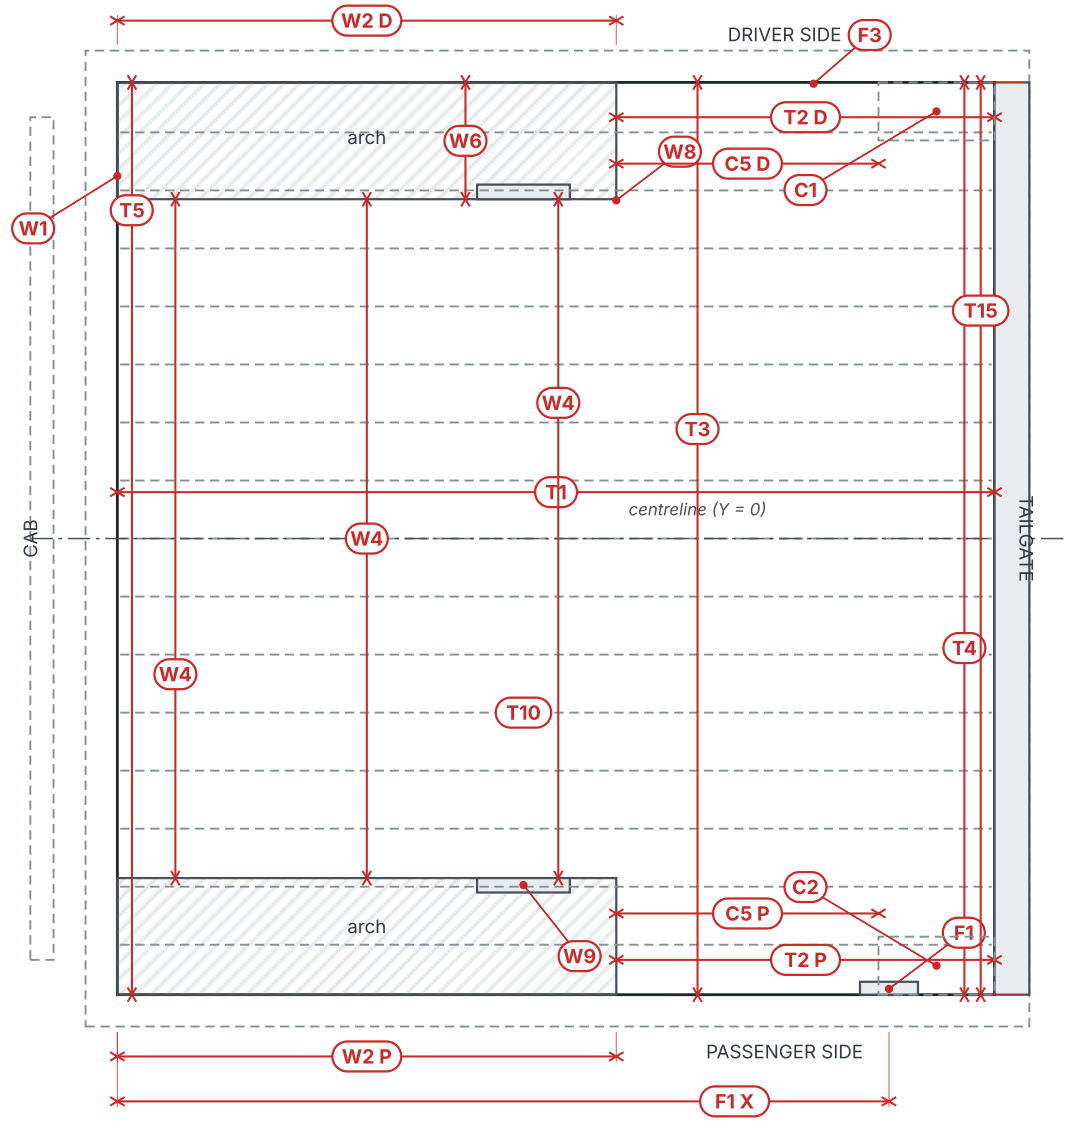

X from the tub front wall (liner face) · Y from the centreline · all in mm · ribs shown at the assumed 100 mm pitch

D3 · Cross-section looking forward from the tailgate (driver side on the right)

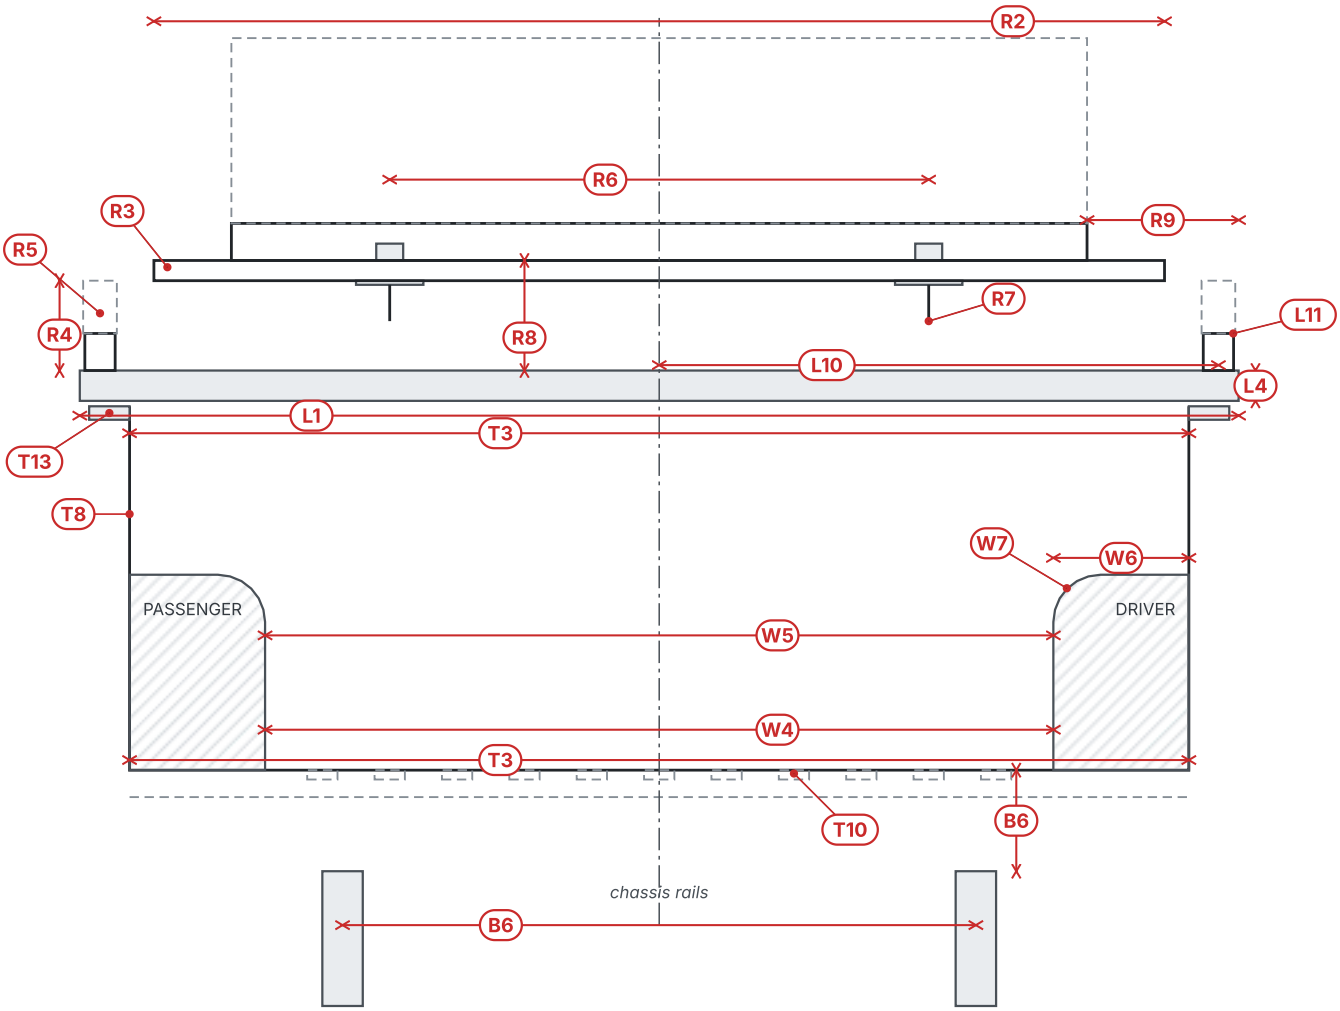


Diagrams: D1, D3

ID	Measure	Model now	Your values (mm unless noted)	Stage	📷
T1	**Floor length on the centreline** 📷 P1FROM the inside face of the closed tailgate TO the X0 straight edge on the front wall, along the centreline tape at rib-top height (laser: back of the laser on the tailgate). Your laser photo read 1.508 m: say where the laser's back was	1512 TUB_L	mm	1 3	☐
T2	**Floor length beside the arches** Rear end of each arch → tailgate inside face, 50 mm in from the side wall	652 TL – ARCH_L	Driver / Passenger	3	☐
T3	**Width wall to wall behind the arches** FROM the passenger wall TO the driver wall, square across at X ≈ 1000 (between the arch and the rib), on the flat of the liner: at the floor, 270 high, and just under the lid rail	1572 TUB_W	Floor / 270 high / Rail	1 3	☐
T4	**Width at the tailgate** FROM housing face TO housing face (between the two tail-light housings, C1/C2) at X ≈ 1460; and wall to wall just forward of the housings	1572 TUB_W	Housings / Walls fwd	3	☐

T5	**Width above the arches at the front** Wall to wall at X ≈ 50, just above arch height and at rail height	1572 `TUB_W`	Above arch Rail	1	☐
T6	**Tub depth** Rib top → top of the tub rail (inside edge), at each corner	540 `TUB_D`	Front D Front P Rear D Rear P	1 3	☐
T7	**Front wall lean** Level held vertical against the front wall: gap at rail height (+ = wall leans back)	0	mm	1	☐
T8	**Side wall lean** Same on each side wall behind the arch (+ = tub wider at the top)	0	Driver Passenger	3	☐
T9	**Corner radii** Floor-to-wall radius, and the radius in the front corners (vertical)	–	Floor/wall Front corners	1 3	☐
T10	**Floor ribs (detail a)** Rib height above the valleys, rib top width, pitch, how many, Y of the middle rib, X where they start and end	14 / 45 / 100 `RIB_H, RIB_W, RIB_PITCH`	Height Top width Pitch Count Mid rib Y Start X End X	1 3	☐
T11	**Liner thickness (detail f)** Calipers on an exposed liner edge (rail lip or tailgate gap)	8 `LINER_ALLOW`	mm	3	☐
T12	**Liner type** Drop-in or spray-in? How is it fixed? Can it come out to bolt through the floor?	drop-in	.....	1	☐
T13	**Tub rail cap (detail f)** Width of the rail's flat top, how far its inside lip overhangs the wall, lip depth	–	Cap width Lip overhang Lip depth	3	☐
T14	**Tailgate inner panel** Thickness inside face → outer skin at mid-height; note any handles or bulges facing the tub	60 `TAILGATE_T`	Thickness Bulges?	3	☐
T15	**Tailgate opening** Clear width between the latch pillars at the floor and at the top; height of the closed tailgate top above the floor	– / 525 `TAILGATE_H`	Width floor Width top Height	3	☐
T16	**Tailgate open** Tailgate down: its top surface vs the tub floor (+ above / – below), its length from the hinge, the cable stay rating	–	Height diff Length Rating kg	3	☐
T17	**Holes in the floor** 📷 P1X, Y of any drain holes or existing bolt holes (lift the liner if it's drop-in)	–	.....	1	☐

2 · Wheel arches

D2 · Tub, side section (looking at the passenger wall from the centre)

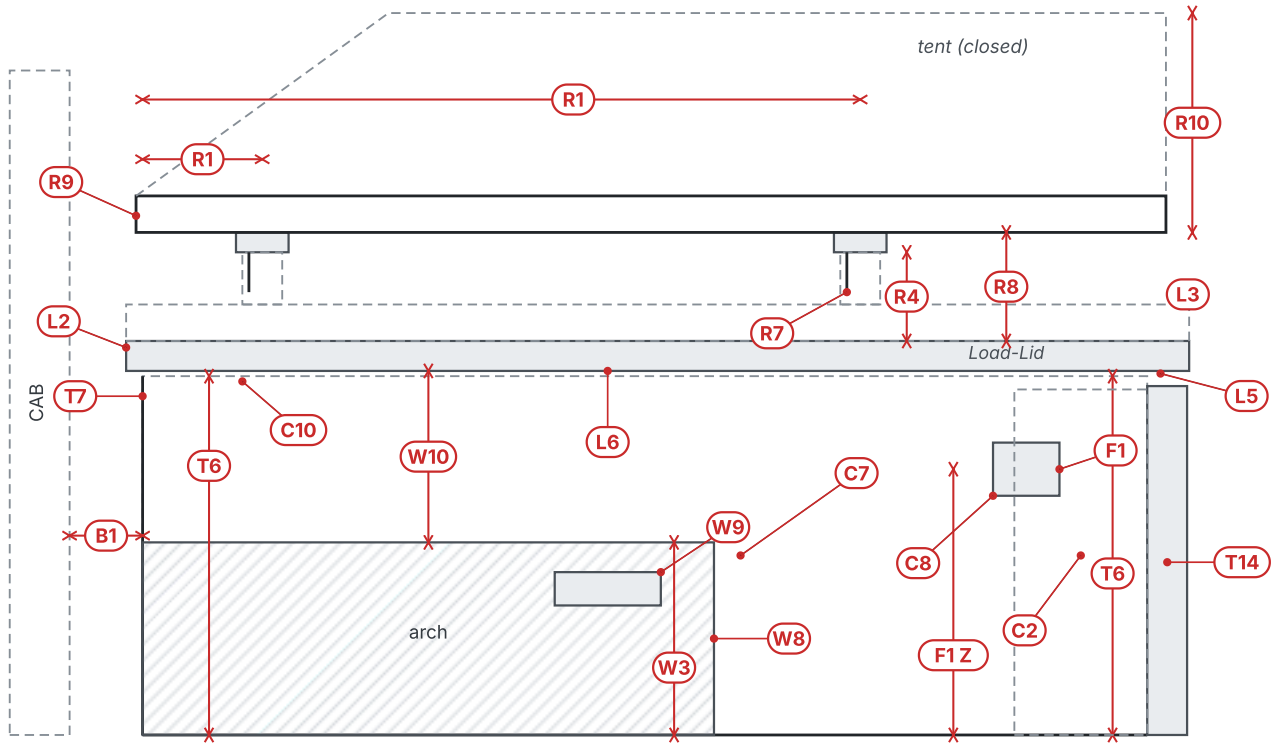

Diagrams: D1, D2, D3


ID	Measure	Model now	Your values (mm unless noted)	Stage	📷
W1	**Arch start** Gap from the front wall to the front of each arch at the floor and at the top (0 if they meet)	0	D floor ☐ D top ☐ P floor ☐ P top ☐	1	☐
W2	**Arch length** Front → rear end of each arch along its inner face, at the floor and at the top	860 ARCH_L	D floor ☐ D top ☐ P floor ☐ P top ☐	1 3	☐
W3	**Arch height** 📷 P4Rib top → top of each arch at the front, middle and rear of its flat top	290 ARCH_H	D front ☐ D mid ☐ D rear ☐ P front ☐ P mid ☐ P rear ☐	1 3	☐
W4	**Width between the arches (floor)** 📷 P1FROM the inner face of the passenger arch TO the inner face of the driver arch, square across just above the floor, at X ≈ 100, 430 and 760 (photo P1)	1170 ARCH_GAP	Front ☐ Mid ☐ Rear ☐	1 3	☐
W5	**Width between the arches (top)** Same three positions, just below the top radius	1170 ARCH_GAP	Front ☐ Mid ☐ Rear ☐	1 3	☐
W6	**Arch intrusion** Side wall face → arch inner face at mid-length	201 ARCH_IN	Driver ☐ Passenger ☐	3	☐

W7	**Arch top shape** Flat width of the top (wall → start of the radius) and the radius on its inboard edge	– / 70 ARCH_R	D flat D radius P flat P radius	3	☐
W8	**Arch rear end** Vertical, sloped or curved? How far the top's rear edge sits forward of the floor's rear edge	vertical	Driver Passenger	3	☐
W9	**Arch well (detail e)** The recess in each arch face: X of its front and rear edges, Z of its bottom and top, depth	620–780 / 195–245 / 35 ARCH_POCKET	D x0 D x1 D z0 D z1 D depth P x0 P x1 P z0 P z1 P depth	3	☐
W10	**Space above the arch** Arch top → underside of the closed Load-Lid (lowest part of its frame), front and rear of each arch	258 UNDER_LID_Z − ARCH_H	D front D rear P front P rear	3	☐

3 · Factory fittings in the tub


D7 · Details (not to scale)

a · Floor ribs (T10)

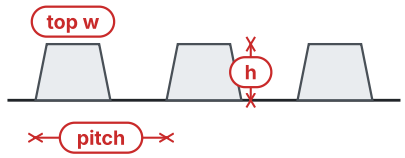


rib height · top width · pitch · count

b · Destroyer rail + T-slot (L10, L11)

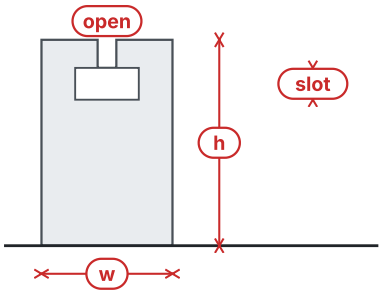

height · width · slot opening · slot depth · inner width


c · Tent bolt at each bar (R7)

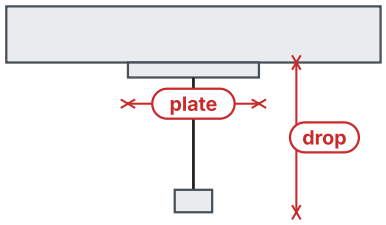

Vortex bar · clamp plate · bolt + nut


measure bar underside → lowest point

d · Factory 240 V outlet (F1, F2)

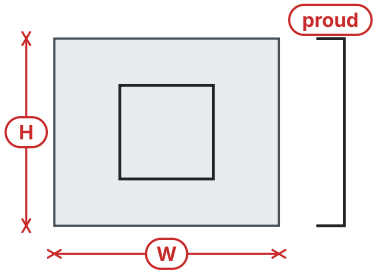


housing W × H · how far it stands proud

e · Arch well (W9)

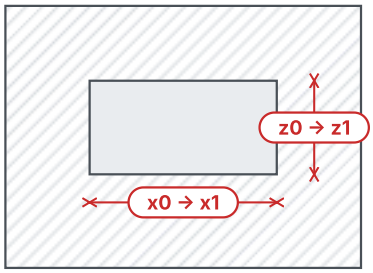

X of front/rear edge from the front wall,
Z of bottom/top above the floor, depth, radius

f · Liner and rail cap (T11, T13)

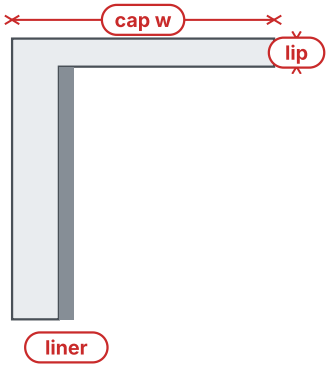


cap width · lip overhang · liner thickness

Diagrams: D1, D2, D7

ID	Measure	Model now	Your values (mm unless noted)	Stage	📷
F1	**Factory 240 V outlet (detail d)** 📷 P2Centre X from the front wall, centre Z above the floor, housing width × height, how far it stands proud	1330 / 400 FACTORY_OUTLET	X ☐ Z ☐ W ☐ H ☐ Proud ☐	1	☐
F2	**Behind the outlet** With the outlet removed: hole size in the steel, cavity depth behind (model: 49 mm between liner and skin), and the way out at the cavity bottom for a 50 mm and a 25 mm conduit (routes R14 / R15, sheet E12)	– / 49	Hole W ☐ Hole H ☐ Cavity ☐ Exit ☐	1	☐
F3	**Tie-down points** Every tie-down or rail: wall, X, Z, type and how far it stands proud	none on the arches	.....	1 3	☐
F4	**Other protrusions** Bolt heads, cleats, liner bosses, light: position and how far they stand proud	–	.....	3	☐

3b · Rear corners: tail-light housings (added 2026-10-25; photo pages P1-P5)

D8 · Rear corner from above (passenger side shown; driver is the mirror image)

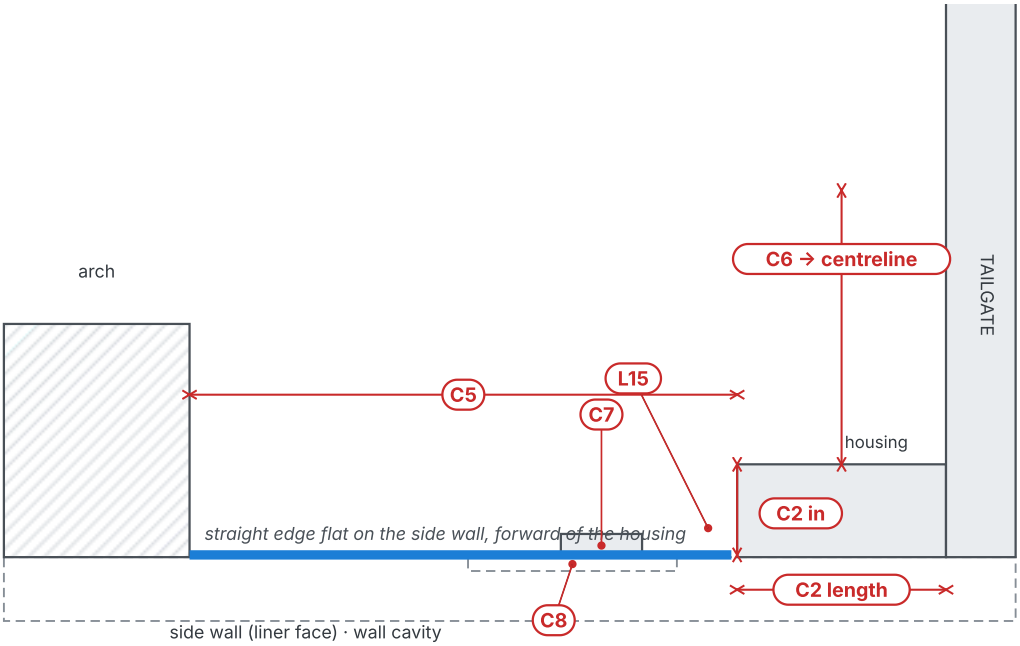

Measure 'in' SQUARE to the straight edge at the floor, 270 high and under the rail. X positions from the front wall (X0).

Diagrams: D8, D1, D2

ID	Measure	Model now	Your values (mm unless noted)	Stage	📷
C1	**Tail-light housing, driver** FROM X0 TO the housing's front face where it leaves the side wall (red line on P2, mirrored), and TO where it meets the tailgate seal. How far it comes in: straight edge flat on the side wall forward of it, measure square to the housing face, at the floor, 270 high and under the rail. Z of its bottom and top	1332 / in 80 (photo est) `TAIL_BULGE_L, TAIL_BULGE_IN`	X start ____ X end ____ In floor ____ In 270 ____ In rail ____ Z bottom ____ Z top ____	1 3	☐
C2	**Tail-light housing, passenger** 📷 P2, P3Same as C1 on the passenger (outlet) side: photo P2	1332 / in 80 (photo est) `TAIL_BULGE_L, TAIL_BULGE_IN`	X start ____ X end ____ In floor ____ In 270 ____ In rail ____ Z bottom ____ Z top ____	1 3	☐
C3	**Housing shape** Flat or curved face? Square, sloped or rounded front edge (sketch it)? Any lip where it meets the wall? Same both sides?	–	....	3	☐
C4	**Access plugs** Each push-rivet plug or cap on the housings: X, Z, diameter, what's behind it (lamp bolts, globe, wiring) and how much hand room it needs. Anything built here must leave these reachable	–	D X ____ D Z ____ D dia ____ P X ____ P Z ____ P dia ____ Hand room ____	3	☐

C5 **Clear length behind the arch**
Rear end of the arch → front face of the tail-light housing, 50 mm in from the side wall, at the floor, 270 high and just below the rail

652
`TL − ARCH_L`

D floor | D 270 | D rail | P floor
P 270 | P rail

3 ☐

C6 **Clear width beside the housing**
Inner face of the housing → centreline of the tub at 270 high (shows how much is left outboard of the slides)

786
`TUB_W / 2`

Driver | Passenger

3 ☐

C7 **Rib behind the arch**
📷 **P2, P3** The vertical pressed rib between the arch and the outlet recess: X of its centre, width, how far it stands proud, full height or not

–

D X | D width | D proud | P X
P width | P proud

3 ☐

C8 **Outlet recess**
📷 **P2** The recessed panel the factory outlet sits in: X of its front and rear edges, Z of its bottom and top, depth behind the wall face (photo P2: it looks lower and further forward than the model)

photo est X 1190, Z 210
`FACTORY_OUTLET`

X front | X rear | Z bottom | Z top
Depth

1 ☐

C9 **Arch top profile**
Photos show a stepped arch top: X of each step and the height before and after it, each side; how far the rear end slopes

flat at 290
`ARCH_H`

1 3 ☐

C10 **Clear height under the lid hardware**
FROM the rib tops (Z0) UP TO the lowest lid part above (skirt, rail, knob or strut), 100 mm in from each side wall, at X ≈ 100, 450, 900, 1250 and 1450. This is the real ceiling for the cabinets and drawers

548
`UNDER_LID_Z`

	X100	X450	X900	X1250	X1450
Driver					
Passenger					

1 3 ☐

C11 **Tie-down pocket in each side wall**
The C-shaped moulded pocket behind the arch (driver photo): X of its front and rear edges, Z of its bottom and top, depth. Is there a factory hook or loop in it?

–

D X0 | D X1 | D Z0 | D Z1
D depth | P same?

3 ☐

C12 **Wall step (ledge line)**
📷 **P2, P3, P4, P5** The horizontal step along each side wall (photos P2, P4, P5): Z of the step at the front, over the arch and at the rear; how deep the step is (straight edge on the upper wall, measure in to the lower wall)

–

D Z front | D Z rear | D depth | P Z front
P Z rear | P depth

1 3 ☐

C13 **Notch in each arch top**
📷 **P1, P4, P5** The triangular notch near the front wall (photos P1, P4, P5): X and Z of its centre, width, depth


–

D X | D Z | D w | D depth
P X | P Z

3 ☐

4 · Load-Lid and Destroyer rails

D4 · Load-Lid, bars and tent, plan view (from above)

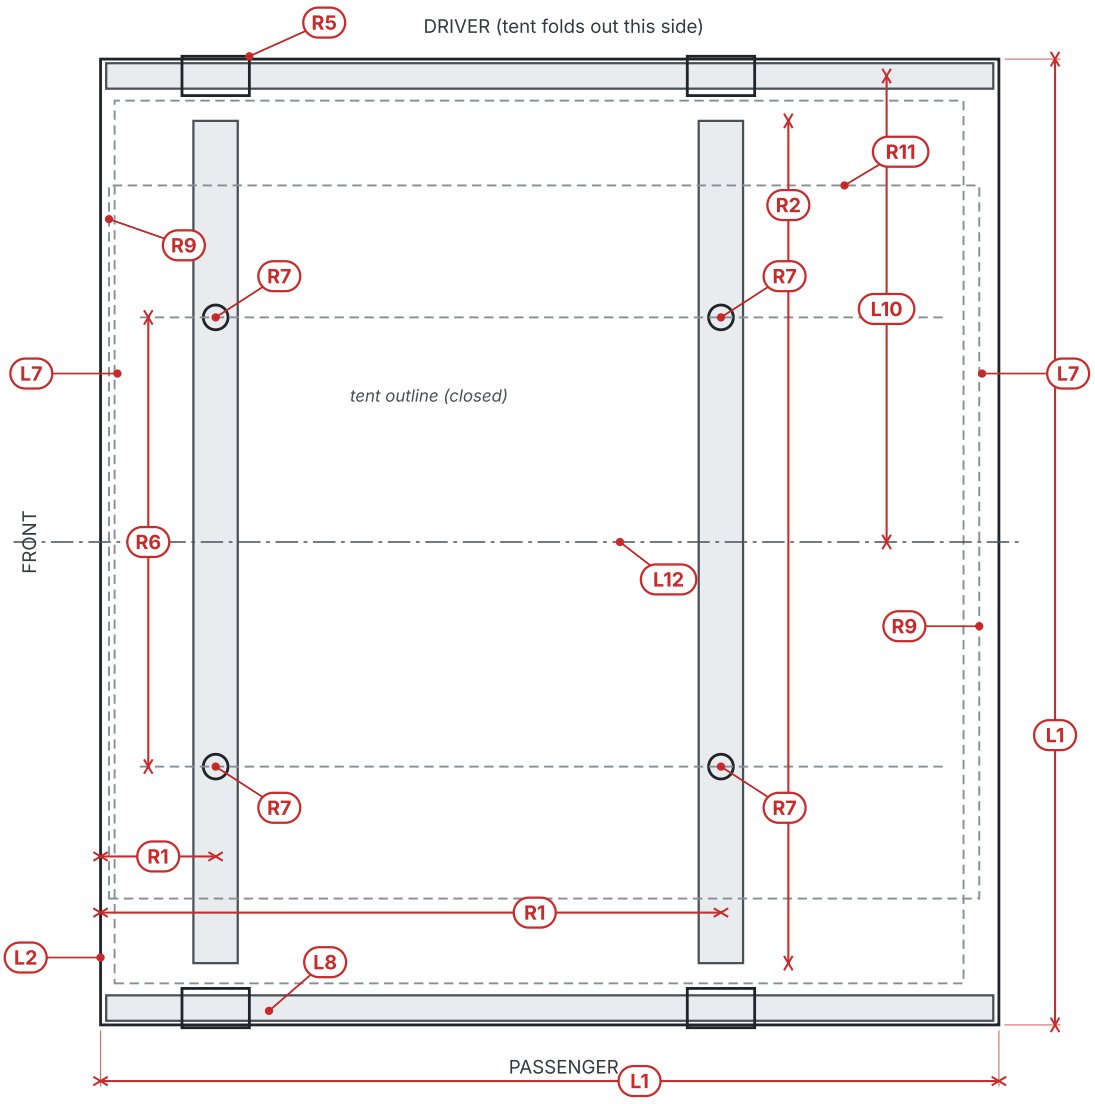

Diagrams: D2, D3, D4

ID	Measure	Model now	Your values (mm unless noted)	Stage	📷
L1	**Lid size** Overall length (along) and width (across) including edge trims	1600 × 1720 `LID_L, LID_W`	Length ☐ Width ☐	6	☐
L2	**Lid front edge** Lid front edge relative to the tub front wall face (− = ahead of the wall)	-25 `LID_X0`	mm ☐	6	☐
L3	**Lid rear edge** Lid rear edge relative to the closed tailgate's outer face (+ = overhangs)	–	mm ☐	6	☐
L4	**Lid thickness** Top skin → lowest part of its perimeter frame	45 `LID_T`	mm ☐	3 6	☐

L5 **Gap rail → lid**
📷 P1Tub rail top → lid underside at the four corners

8
LID_CLEAR

FD | FP | RD | RP

3 ☐

L6 **Lid side skirt and lid rail (each side)**
📷 P2, P3, P4, P5The UTE MASTER plate hanging below the lid, and the aluminium rail with holes under it (photos P2, P3): Z of the LOWEST edge of each (from the rib tops), and how far each stands in from the side wall. Full length, or where do they start and stop (X)?

skirt 490 / rail 488 (photo est)
LID_SKIRT, LID_BASE_RAIL

Skirt Z | Skirt in | Rail Z | Rail in | X start | X end

1 3 ☐

L7 **Hinges and lock**
📷 P2, P3Hinge type and positions; lock/latch positions and how far they reach into the tub

–

3 ☐

L8 **Gas struts (inside the tub, front)**
📷 P1, P4, P5Lid closed. For BOTH ends of each strut: X (from X0), Z (from Z0) and distance from the side wall to the strut's centre; strut diameter (photos P1, P4, P5)

x 150–480, z 495–540 (photo est)
LID_STRUT

	Low X	Low Z	Low in	High X	High Z	High in	Dia
Driver							
Passenger							

1 3 ☐

L9 **Star-knob clamps**
📷 P2, P3Each star knob on the lid skirt (photos P2, P3): X, how far its tip is from the side wall, Z of its lowest point. How many per side?

1160 / 1290 (photo est)
LID_KNOBS_X

	D X	D in	D Z	P X	P in	P Z
Knob 1						
Knob 2						
Knob 3						

3 ☐

L10 **Destroyer rails (detail b)**
Height above the lid top, width, length, X of the front and rear ends, Y of the rail centre from the centreline

55 / 45 / – / 830
LID_RAIL_H, LID_RAIL_W, LID_RAIL_Y

Height | Width | Length | Front X | Rear X | Y

6 ☐

L11 **Rail T-slot (detail b)**
Slot opening, slot depth, inner width, lip thickness; T-bolt size used

–

Opening | Depth | Inner w | Lip | Bolt

6 ☐

L15 **Lid rear stays**
📷 P2, P3The steel bar from each rear lid corner down to 2 bolts at the tail-light housing (photos P2, P3): X and Z of each bolt; X where the bar leaves the lid; how far the bar stands off the wall (top and bottom); bar width

bolts ~1322, Z 255 (photo est)
LID_REAR_STAY

	Bolt1 X	Bolt1 Z	Bolt2 Z	Top X	Off top	Off bot	Width
Driver							
Passenger							

1 3 ☐

L16 **Lid front-corner brackets**
📷 P1, P4, P5The angle bracket in each front corner with a plastic hook at its foot (photos P1, P4, P5): how far it stands off the front wall, how far its outer edge is from the side wall, its width, Z of the bottom of the hook

hook Z 285 (photo est)
LID_FRONT_BRACKET

	Off front	From side	Width	Hook Z
Driver				
Passenger				

1 ☐

L12	**Lid top surface** Chequer pattern height; flat or crowned (straight edge across: gap at the centre)	flat	Pattern	Crown			6	☐
L13	**Lid underside over the batteries (v0.14)** Tub floor → lid underside at the driver front corner (X ≈ 100 and 250, Y ≈ 200 and 500): the battery top foam assumes 9 mm above the handle lugs	548 `UNDER_LID_Z`	X100 Y200	X100 Y500	X250 Y200	X250 Y500	1	☐
L14	**Space for the water-can jacket (v0.14)** Lid top → tent base underside over the water can, and lid top → the tent's under-rail; is a 30 mm jacket top possible?	163.4 `TENT_Z0 − LID_TOP_Z`	To base	To rail			6	☐


5 · Rack bars and tent

Diagrams: D2, D3, D4, D7

ID	Measure	Model now	Your values (mm unless noted)	Stage	📷
R1	**Bar positions** Centre line of each Vortex bar from the lid front edge (or from the tub front wall, say which)	180 / 1080 (from tub wall) `RACK_BAR_X`	Front bar ☐ Rear bar ☐ Datum ☐	6	☐
R2	**Bar length and overhang** Overall length; overhang past each leg	1500 `RACK_BAR_L`	Length ☐ D overhang ☐ P overhang ☐	6	☐
R3	**Bar section** Width × height of the bar; top slot width	79 × 30 `RACK_BAR`	W ☐ H ☐ Slot ☐	6	☐
R4	**Bar height** Lid top → underside of each bar beside each leg	133.4 `TENT_GAP − bar`	Front D ☐ Front P ☐ Rear D ☐ Rear P ☐	6	☐
R5	**Legs / brackets** Footprint on the rail (along × across), leg height, part number	–	Footprint ☐ Height ☐ Part no. ☐	6	☐
R6	**Tent under-rails** Y of each under-rail centre from the centreline; X of the rail ends	±400 `TENT_UNDER_RAILS_CC`	D Y ☐ P Y ☐ Front X ☐ Rear X ☐	6	☐
R7	**Tent bolt tails (detail c)** At each of the 4 crossings: bar underside → lowest point of bolt, nut or plate; plate size; bolt size	60 `TENT_BOLT_DROP`	Front D ☐ Front P ☐ Rear D ☐ Rear P ☐ Plate ☐ Bolt ☐	6	☐
R8	**Gap lid → tent** Lid top → lowest part of the tent base at the front, middle and rear, both sides	163.4 `TENT_GAP`	Front D ☐ Front P ☐ Mid D ☐ Mid P ☐ Rear D ☐ Rear P ☐	6	☐
R9	**Tent position** Tent front and rear edges from the lid front edge; overhang past the lid edge each side	-10 `TENT_X0`	Front ☐ Rear ☐ D overhang ☐ P overhang ☐	6	☐
R10	**Tent shape** Closed height (base → top of the roof bars), length of the front slope, top-bar spacing and length	330 / 380 / 1040 / 890 `TENT_H, TENT_SLOPE_L, TENT_BAR_CC, TENT_BAR_L`	Height ☐ Slope ☐ Bar c/c ☐ Bar length ☐	5	☐
R11	**Ladder bracket** Where it is and how far it sticks out or down	–	.....	6	☐
R12	**Tent open** How far the open tent reaches past the driver side; floor height when open	–	Reach ☐ Floor height ☐	-	☐
R13	**Tent to cab** Tent front face → cab rear at tent-base height	–	mm ☐	4	☐

6 · Body, cab gap and chassis

D5 · Vehicle side view (passenger side): heights from the ground, positions from the tub front wall

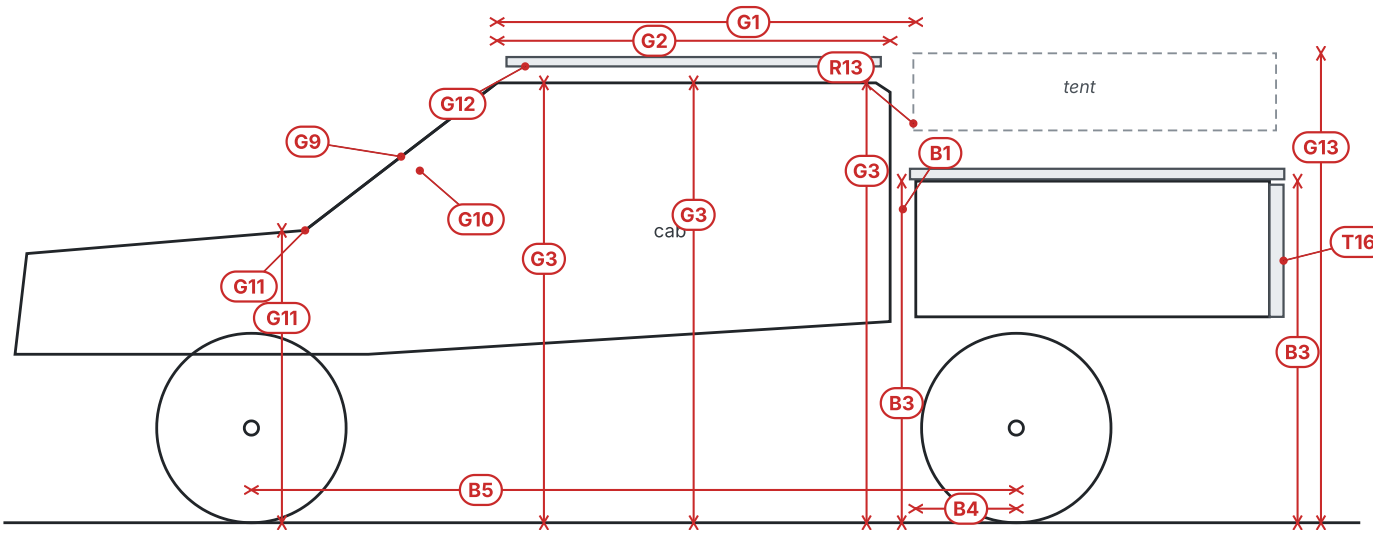

Park on level ground, normal tyre pressures, unladen. Use a plumb line or level to transfer points to the ground.


Diagrams: D5, D3

ID	Measure	Model now	Your values (mm unless noted)	Stage	📷
B1	**Cab–tub gap** Cab back wall → tub front wall at the top, middle and bottom	55 `CAB_REAR_X`	Top ☐ Mid ☐ Bottom ☐	1 4	☐
B2	**In the gap** Body mounts, hoses, lines, wiring. Free space near the passenger top corner for a ~150 × 150 × 90 junction box?	–	Free W ☐ Free H ☐ Free D ☐	4	☐
B3	**Tub height** Ground → top of the tub rail at the tailgate and at the front corner (the floor is this minus T6)	1460 `FLOOR_ABOVE_GROUND`	Rear ☐ Front ☐	1	☐
B4	**Rear wheel centre** Plumb from the tub front edge and from the wheel centre; distance along the ground	430 `REAR_AXLE_X`	Driver ☐ Passenger ☐	1	☐
B5	**Wheelbase check** Front → rear wheel centres	3270 `WHEELBASE`	Driver ☐ Passenger ☐	-	☐
B6	**Chassis rails** Centre Y of each rail; top of the rail below the tub floor; rail width × height	±470 / -150 `CHASSIS_RAIL_Y, CHASSIS_Z`	D Y ☐ P Y ☐ Top Z ☐ W ☐ H ☐	1	☐
B7	**Cable route** Outlet → passenger chassis rail → cab gap: obstacles, existing clips and holes	–	....	1	☐

B8	**Tub underside** Cross-member positions (X) under the tub floor, in case anything bolts through	–		1	☐

7 · Roof, windscreen and platform

D6 · Roof crown: straight edge across the roof (repeat at the front, middle and rear)

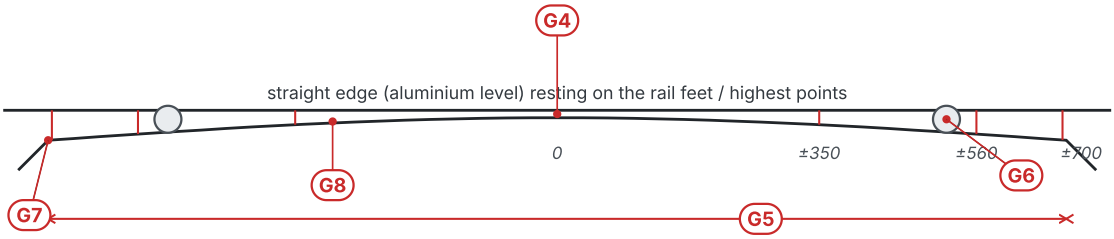

Measure the gap from the straight edge down to the roof skin at each mark, both sides. Rear view; driver side on the right.

Diagrams: D5, D6

ID	Measure	Model now	Your values (mm unless noted)	Stage	📷
G1	**Header to tub** Horizontal: top of the windscreen (header seal) → tub front wall (plumb line from the header)	1790 CAB_FRONT_X	mm	2 7	☐
G2	**Roof length** Header → rear edge of the roof skin	1680	mm	2	☐
G3	**Roof height** Ground → roof skin on the centreline, 200 mm behind the header, middle, 100 mm from the rear	1880 ROOF_Z	Front / Mid / Rear	2 7	☐
G4	**Roof crown (D6)** Straight edge across the roof: gap to the skin at each mark. Rows: front / mid / rear	flat	P 700 / P 560 / P 350 / 0 / D 350 / D 560 / D 700 Front Mid Rear	2 7	☐
G5	**Roof width** Skin width between the drip channels at the front, middle, rear	–	Front / Mid / Rear	2	☐
G6	**Roof mounting points** How many; X (from the header) and Y of each; thread; cover type	–	.....	2	☐
G7	**Roof rails** Height, foot positions; do they come off for the Wedgetail kit?	–	.....	2	☐
G8	**Roof items** Shark-fin antenna position and height; anything else on the roof	–	.....	2 7	☐

G9	**Windscreen angle** Angle finder flat on the glass at the centre, from horizontal	–	degrees	7	☐
G10	**Windscreen size** Length along the glass (header → bottom edge, centre) and width at the top	–	Length / Width	7	☐
G11	**Bonnet rear edge** Height above ground and horizontal distance from the header at the centre; top of the parked wipers	–	Height / From header / Wipers	7	☐
G12	**Platform (once fitted)** Platform underside above the roof skin at the front and rear; front edge vs the header	70 PLAT_Z	Front / Rear / Front edge	2 7	☐
G13	**Overall height** Ground → top of the closed tent; ground → top of the platform	2006	Tent / Platform	-	☐
G14	**Headlining and roof cables** How far the headlining drops to reach the roof points; path for a cable roof → cab (which pillar?)	–		2	☐

8 · Engine bay and cabin

ID	Measure	Model now	Your values (mm unless noted)	Stage	📷
E1	**Start battery** Type and size; terminal type; room for a MIDI fuse holder within 300 mm of the + terminal	–		1	☐
E2	**Fuse box** Location; fuse type (mini / micro2) for the add-a-fuse; an ignition-switched circuit to tap	–		1	☐
E3	**Alternator** Rated current on its label (amps)	unknown	Amps	1	☐
E4	**Engine bay → chassis** Path for the 25 mm² twin from the start battery to the passenger chassis rail (R21); exhaust distance along the rail (R17–R19)	–		1	☐
E5	**Under the rear seat** Space for the cabin outlet box: length × width × height, what's there now	45 L `CABIN_SEAT_BOX`	L W H	5	☐
E6	**Cab floor grommets** Existing grommets that could take the cabin feed from the chassis rail (R20)	–		5	☐
E8	**Cab back (C-pillar corner)** Flat face up the passenger corner of the cab back for the 32 mm conduit (R25), and the gap between the cab top and the platform rear member	–	Width Gap	2	☐
E9	**Chassis rail web** Height of the passenger rail web and the free length for the two conduits from the tub to the cab-tub gap (R16 / R17)	180 / –	Web H Free L	1	☐
E7	**Dash switch blanks** Free switch blanks on the dash (optional visor stow switch)	–		7	☐

9 · Equipment and vehicle details

ID	Measure	Model now	Your values (mm unless noted)	Stage	📷
Q1	**Fridge** Confirmed Dometic CFX3 45 (694 × 398 × 476): check the handle height and that the handles fold up for the straps	CFX3 45	Model ☐ L ☐ W ☐ H ☐ Lid ☐	3	☐
Q2	**Accessories fitted** Tow bar (ball weight), bull bar, side steps, snorkel, anything else	–	.....	-	☐
Q3	**Compliance plate** GVM, GCM, rear axle rating	GVM 3250	GVM ☐ GCM ☐ Rear axle ☐	-	☐
Q4	**Weighbridge (optional)** Front and rear axle weights, unladen, full fuel	–	Front ☐ Rear ☐	-	☐
Q5	**Tyres** Size and pressures	265/70R17	Size ☐ Pressures ☐	-	☐

Photo checklist

- [ ] Whole tub from the tailgate, from each rear corner and from above (lid open)
- [ ] Each arch: side on, with a tape along it; close-up of each arch well with a rule in it
- [ ] Front wall and both front corners; the floor ribs with a rule across them
- [ ] Factory outlet: on, and removed showing the hole and what's behind
- [ ] Every tie-down and protrusion with a rule beside it
- [ ] Under the lid: hinges, lock, struts, clamps, any frame members
- [ ] Each rear corner (both sides): square-on to the side wall from the tub centre, from the tailgate looking forward, and from above with the lid open, with a tape along the floor and up the tail-light housing
- [ ] Destroyer rail end-on (T-slot profile) with calipers
- [ ] Each of the 4 tent-bolt crossings from the side, with a rule from the bar to the lowest point
- [ ] Cab–tub gap from above and below; chassis rail beside the gap
- [ ] Roof: straight edge across with the gaps visible; the roof mounting points uncovered
- [ ] Side profile of the windscreen and bonnet with a level for reference
- [ ] Engine bay: start battery, fuse box, route to the chassis; under the rear seat

Notes and sketches